

METALASTIC™ Expansion Joint Covers

Updated: 8/16



*Quality You Can Trust...From
North America's Largest Roofing Manufacturer!™*



METALASTIC™

EXPANSION JOINT COVERS

Description

Metalastic™ Expansion Joint Covers are flexible, weatherproof exterior covers for expansion joint openings, and are an effective, flexible closure for a wide variety of standard and special applications. Metalastic™ Expansion Joint Covers are used with all GAF-approved BUR, SBS & APP modified bitumen systems. Can also be used on TPO & PVC, but must be mechanically fastened.

Advantages

- Flexible & durable... Moves with expansion and contraction of roof.
- Seamless design... Contoured bellows have no seams or channels to trap water.
- Splice-lock seam tape included... Self-adhering seam-joining tape saves time and eliminates installation hassles.
- Easy installation... Same splicing technique for all styles.
- Saves labor... Installs in up to 1/3 the time of traditional products.

Styles


- A. CMF* (Curb Mount Flange)**
 - Four 1.5" (38.1 mm) wide metal nailers with membrane cover and nails
 - B. CTW* (Curb-to-Wall)**
 - One 4" (102 mm) wide nailer and two 1.5" (38.1 mm) wide nailers with membrane cover and nails
 - C. SMF (Straight Metal Flange)**
 - Two 4" (102 mm) wide metal nailers with membrane cover and nails
 - D. LP* (Low Profile)**
 - Two 1.5" (38.1 mm) wide metal nailers with membrane cover and nails
- Factory transitions available for all styles
*Custom widths available upon request

Application

Refer to the application instructions for Metalastic™ Expansion Joint Covers on gaf.com.

For Application Questions

Contact GAF Technical Services at 1-800-766-3411 or visit gaf.com.

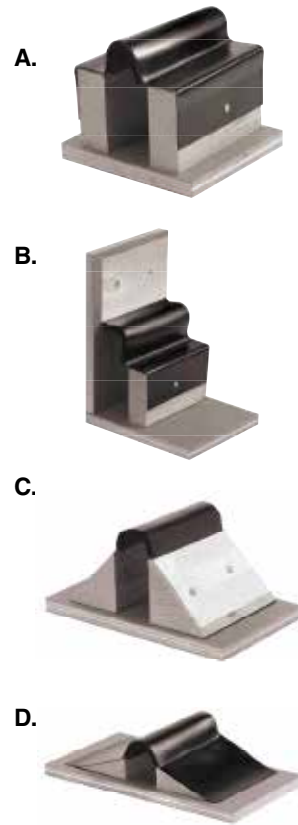

Product Specifications (Nominal)

Membrane:	Hybrid PVC (fiberglass reinforced) Thickness .04" (1.02 mm) Colors: Black or White (no extra cost for white)
Bellows:	Closed Cell Foam Thickness varies from 0.375" to .75" (9.53 mm–19.1 mm) Width 4"–24" (10.16 cm–60.96 cm)
Nailers:	Aluminum .025" (.64 mm) Stainless .018" (.46 mm) Galvanized 26 gauge .018" (.56 mm)
Length:	50' (15.24 m), 100' (30.28 m), 250' (76.2 m) standard Special lengths available upon request; 50' (15.24 m) minimum

Production Factory: Burgaw, NC