


CLAIM NO.: Claim	Number Reinspection	INSURED			
Policy No.: ABC	2	John Smith			
Date of Loss: 10/02	2/2023 12:00 AM	201 Main Street			
Type of Loss:		NJ 10000			
Deductible:		Home phone: Business phone:			
	0-4 N -	Mobile phone:			
Year Built:	Cat No.:	Bus. Fax:			
Adjuster:		Contact:			
Phone:		Loss address:			
Email:		201 Main Street NJ 10000			
	Status: Claim Opened Age: 07d 12h Assignees:				
	Originated: 10/03/2023, 1:12 PM by Estimate Writer (1) (Claim Connection)				
DATES	DATES POLICY HQ3				
Created: 10/03/202	Created: 10/03/2023 Assigned: Policy Type:				
Received:	Contacted:	Renewed: time(s)			
Inspected:	Estimated:	Effective from: to:			
Approved:	Job Started:	Coverage Limits Deductible Reserve			
Completed:	Closed:				
-					
Overall risk condition:					
INITIAL LOSS REP	INITIAL LOSS REPORT				


## CAUSE

## DAMAGES

## GENERAL COMMENTS

## Roofplan 2:



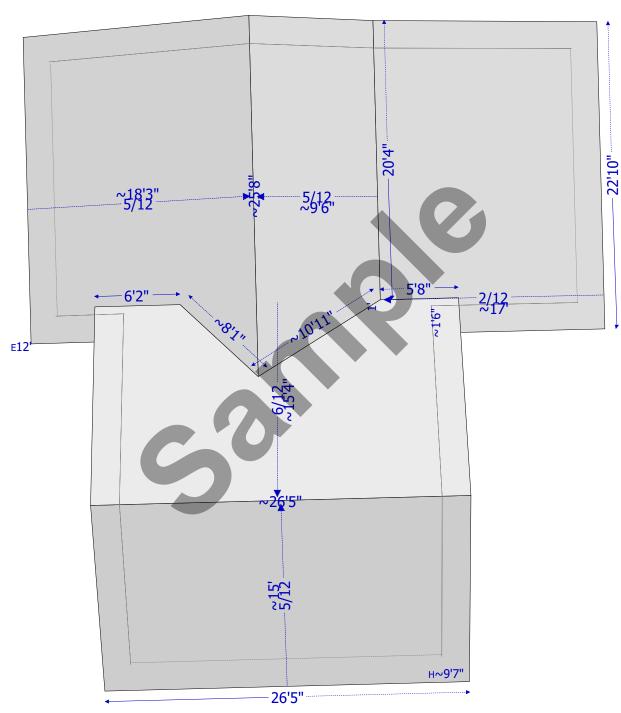

escription	Quar	itity Un	it Price	Per	Total Cost
STIMATE: Structure (Claim Connection)		Claim #	Claim Nu	mber,	First, Last
In progress					
ROOFPLAN: Roofplan 2					
■ Roof Roof area: 1,761.28 SF Squares: 17.6 SQ Soffit: 369.	51 SF				
<b>Eaves:</b> 83.96 LF <b>Ridge:</b> 52.04 LF					

<sup>1</sup> To the best of our ability based on data available, this Estimate has been prepared to adhere with current, local building codes, based on the property's location.

2 Tear Out - Shingles, Laminated/Architectural Good	17.60	\$61.51	SQ	\$1,082.58
3 Replace - Shingles, Laminated/Architectural Good	19.36	\$295.27	SQ	\$5,716.43
Includes 10% waste on quantity.		4		
4 Tear Out - Shingles, Starter Row, Continuous	83.96	\$0.21	LF	\$17.63
5 Replace - Shingles, Starter Row, Continuous	92.36	\$2.23	LF	\$205.96
Includes 10% waste on quantity.				
6 Remove - Ridge Cap Shingles, Fiberglass, Laminated	52.04	\$1.61	LF	\$83.78
7 Replace - Ridge Cap Shingles, Fiberglass, Laminated	57.24	\$6.84	LF	\$391.52
Includes 10% waste on quantity.				
Steep and High Charges				
8 Remove - Height Allowance, Roof Covering, 2 Story	7.51	\$25.34	SQ	\$190.30
9 Replace - Height Allowance, Roof Covering, 2 Story	7.51	\$25.34	SQ	\$190.30
<b>Underlayment</b>				
10 Replace - Felt, 15LB	13.79	\$36.53	SQ	\$503.75
11 Replace - Felt, 15LB, Double Coverage	3.81	\$71.12	SQ	\$270.96
12 Replace - Ice/Water Shield Double Layer	88.16	\$9.82	LF	\$865.73
Includes 5% waste on quantity.				
Conversion: 0.06 SQ per LF				
13 Replace - Ice/Water Shield Single Layer	19.95	\$4.92	LF	\$98.16
Includes 5% waste on quantity.				
Conversion: 0.03 SQ per LF				
Orip Edge				
14 Tear Out - Drip Edge (Rake Only) Aluminum, Pre-Finish Color	124.00	\$0.64	LF	\$79.36
15 Replace - Drip Edge (Rake Only) Aluminum, Pre-Finish Color	130.20	\$3.24	LF	\$421.85
Includes 5% waste on quantity.				
16 Tear Out - Drip Edge (Gutter Apron) Aluminum, Pre-Finish Color, 5"	83.96	\$0.64	LF	\$53.73
17 Replace - Drip Edge (Gutter Apron) Aluminum, Pre-Finish Color, 5"	88.16	\$2.73	LF	\$240.67
Includes 5% waste on quantity.				
Flashings				
18 Remove - Flashing, Step, Aluminum, .016	10.00	\$1.69	LF	\$16.90
19 Replace - Flashing, Step, Aluminum, .016	21.00	\$5.33	LF	\$111.94
Includes 5% waste on quantity.				
20 Remove - Flashing, Plumbing Vent Aluminum	2	\$18.02	EA	\$36.04

Symbility Estimate Example				
Description	Quantity	Unit Price	Per	Total Cost
ESTIMATE: Structure (Claim Connection)	Clair	n #Claim Nu	mber,	First, Last
☑ In progress				
21 Replace - Flashing, Plumbing Vent Aluminum	2	\$46.96	EA	\$93.92
22 Remove - Roof to Wall Flashing Aluminum	5.00	\$0.81	LF	\$4.05
23 Replace - Roof to Wall Flashing Aluminum	5.25	\$5.31	LF	\$27.88
Includes 5% waste on quantity.				
24 Remove - Chimney Flashing Large	1	\$49.62	EA	\$49.62
25 Replace - Chimney Flashing Small	1	\$367.24	EA	\$367.24
Ventilation				
26 Tear Out - Ridge Vent Composite/PVC	52.04	\$1.95	LF	\$101.48
27 Replace - Ridge Vent Composite/PVC	54.64	\$7.67	LF	\$419.09
Includes 5% waste on quantity.				
28 Dumpster 10 Yard	1	\$611.42	EA	\$611.42
Roof - Subtotal (34 items)				\$12,252.29
Roofplan 2 - Subtotal (34 items)				\$12,252.29



Symbility Estimate Example			
ESTIMATE: Structure (Claim Connection)	Claim #Claim Number, First, Last		
In progress			
■ ROOFPLAN: Roofplan 2		Quantity	
Roof area		1,761.28 SF	
Squares		17.6 SQ	
Ridge		52.04 LF	
Eaves		83.96 LF	
Soffit		369.51 SF	
Recap by Area	Total Cost	Percentage	
Roofplan 2	\$12,252.29	100.00%	
Total, all areas	\$12,252.29	100.00%	
Recap by Category	Total Cost	Percentage	
DMO - General Demolition	\$611.42	4.99%	
RFG - Roofing - RFG - Accessories	\$2,259.17	18.44%	
RFG - Roofing - RFG - Flashing	\$1,503.20	12.27%	
RFG - Roofing - RFG - Other	\$380.60	3.11%	
RFG - Roofing - RFG - Shingles	\$7,497.90	61.20%	
Total, all categories	\$12,252.29	100.00%	
Recap by Coverage	Total Cost	Percentage	

Symbility Estimate Example

ESTIMATE: Structure (Claim Connection)		Claim #Claim Number, First, Last			
In progress					
MATERIALS	Quantity	Purchase Qty	Total		
Chimney Flashing Small (Replace)	1 EA	n/a	\$124.31		
Drip Edge (Gutter Apron) Aluminum, Pre-Finish Color, 5" (Replace)	88.16 LF	n/a	\$61.71		
Drip Edge (Rake Only) Aluminum, Pre-Finish Color (Replace)	130.20 LF	n/a	\$157.54		
Dumpster 10 Yard	1 EA	n/a	\$611.42		
Felt, 15LB (Replace)	13.79 SQ	n/a	\$139.42		
Felt, 15LB, Double Coverage (Replace)	3.81 SQ	n/a	\$69.68		
Flashing, Plumbing Vent Aluminum (Replace)	2 EA	n/a	\$39.84		
Flashing, Step, Aluminum, .016 (Replace)	21.00 LF	n/a	\$31.30		
Ice/Water Shield Double Layer (Replace)	88.16 LF	n/a	\$507.80		
Ice/Water Shield Single Layer (Replace)	19.95 LF	n/a	\$57.46		
Ridge Cap Shingles, Fiberglass, Laminated (Replace)	57.24 LF	n/a	\$228.96		
Ridge Vent Composite/PVC (Replace)	54.64 LF	n/a	\$192.33		
Roof to Wall Flashing Aluminum (Replace)	5.25 LF	n/a	\$6.41		
Shingles, Laminated/Architectural Good (Replace)	19.36 SQ	n/a	\$2,959.18		
Shingles, Starter Row, Continuous (Replace)	92.36 LF	n/a	\$61.88		
			\$5,249.24		

LABOR	Quantity	Rate	Total
1 CARPENTER	~2.79 hrs	\$81.28	\$226.76
1 LABORER	~0.39 hrs	\$45.36	\$17.63
1 ROOFER	~51.15 hrs	\$101.37	\$5,185.05
1 ROOFER & 1 LABORER	~20.05 hrs	\$73.37	\$1,471.50
1 SHEET METAL WORKER	~1.19 hrs	\$85.23	\$102.11
	~75.57 hrs		\$7,003.05

Symbility Estimate Example

ESTIMATE: Structure (Claim Connection)	Claim #Claim Number, First, Last
In progress	
Total Materials:	\$5,249.24
Total Labor:	\$7,003.05
Total Equipment:	\$0.00
Total Market Conditions:	\$0.00
Subtotal:	\$12,252.29
Tax 1 6.000% (applies to materials only):	\$314.96
Subtotal:	\$12,567.25
Add 0.00% overhead:	\$0.00
Add 0.00% profit:	\$0.00
Estimate Subtotal:	\$12,567.25
Deductible (\$0.00):	\$0.00
Estimate Total:	\$12,567.25

Finalization