

EnergyGuard™ Perlite Cant Strip

Updated: 7/17



*Quality You Can Trust...From
North America's Largest Roofing Manufacturer!™*



ENERGYGUARD™

PERLITE CANT STRIP (1 of 2)

Description

- Factory-fabricated from rigid EnergyGuard™ Perlite insulation board.
- Cut at angles that provide a true 45° angle between horizontal and vertical surfaces.
- UL, ULC Flame Spread Rating 35.
- Easy to fabricate for installation with most types of roof systems.
- Strips are available in 3", 4", and 5" (76 mm, 102 mm, and 127 mm) nominal sizes.

Uses

- To provide a smooth transition from horizontal to vertical surfaces.
- Properly installed, EnergyGuard™ Perlite Cant Strip is suitable for use under built-up and modified bitumen roofing systems.
- Refer to the application specifications in the current membrane manufacturer's application and specifications manual for proper installation procedures for EnergyGuard™ Perlite Cant Strip.

Benefits

- Strong and dimensionally stable.
- Available in 4 standard sizes.
- Can be shipped in mixed loads with roof insulation and tapered systems.
- Multiple shipping locations.
- Easily identifiable bundles.
- Average recycled content is 37%.


Limitations

- EnergyGuard™ Perlite Cant Strips are a non-structural, non-load-bearing material.
- EnergyGuard™ Perlite Cant Strips should be stored dry and be protected from the elements. Once properly loaded at the job site, remove factory wraps and cover with a breathable tarp.
- No more Cant Strip should be applied than can be completely covered with finished roofing on the same day.
- Do **NOT** use under fully adhered single-ply systems or with direct torch application of modified bitumen.
- If torch-grade modified bitumen roofing is to be installed over EnergyGuard™ Perlite Cant Strips, a fiberglass base sheet **MUST** first be installed.

Code Compliance



EnergyGuard™
Perlite Cant Strip

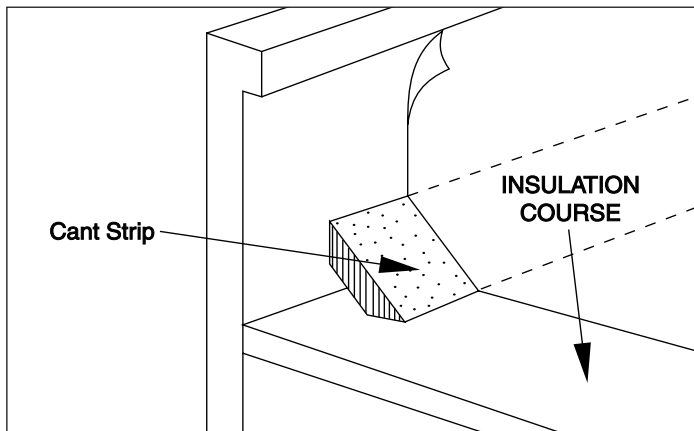

Cant Sizes*

1" (25 mm)	x 3" (76 mm)	x 48" (1.22 m)
1" (25 mm)	x 4" (102 mm)	x 48" (1.22 m)
1 1/2" (38 mm)	x 4" (102 mm)	x 48" (1.22 m)
1 1/2" (38 mm)	x 5" (127 mm)	x 48" (1.22 m)

*All sizes shown are nominal and subject to nominal manufacturing tolerances.



ENERGYGUARD™

PERLITE CANT STRIP (2 of 2)

EnergyGuard™ Perlite Cant Sizes and Packaging

Nominal Size (metric)		Per Bundle		Per Pallet	
		Pcs.	Ln. Ft. (Ln. Meter)	Bundles	Ln. Ft. (Ln. Meter)
1 x 4 in (25 x 102 mm)		21	84 (25.6)	30	2,520 (768)
1 x 3 in (25 x 76 mm)		33	120 (36.51)	30	3,960 (1201)
1 1/2 x 4 in (38 x 102 mm)		30	120 (36.51)	20	2,400 (731.52)
1 1/2 x 5 in (38 x 127 mm)		18	72 (21.9)	20	1,440 (438.9)

Note: Packaging is subject to change without prior notice.