


Installation Guide for

M-Weld Gravel Stop MB Fascia B

(For Built Up or Modified Roofs)

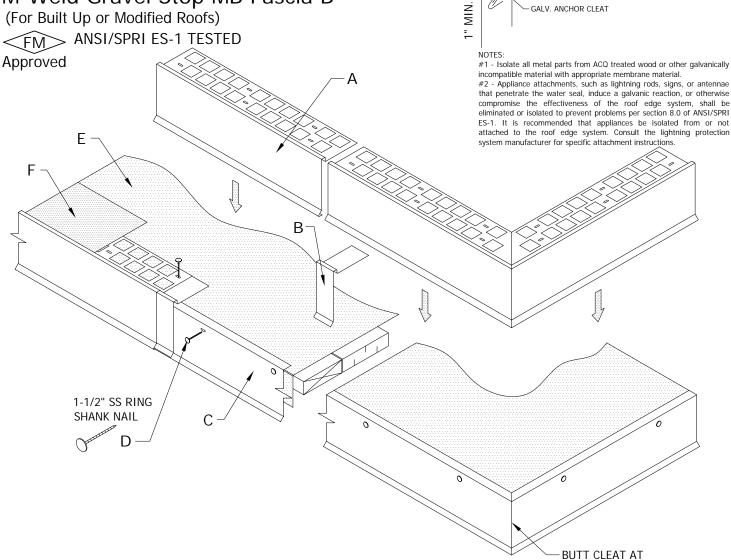

- A. Formed Fascia Cover 10'-0" Lengths
- B. Concealed Joint Splice 4" Lengths
- C. Galvanized Steel Anchor Cleat 10'-0" Lengths
- D. 1-1/2" SS Ring Shank Nail at 12" o.c. (6" from ends) (Provided & Required by Manufacturer)

EACH CORNER, TYP.

STRIP-IN OR

BASE PLY

CAP SHEET

1-1/2" SS RING SHANK NAILS

GALV. ANCHOR CLEAT

FASCIA

JOINT SPLICE

E. Base Ply


(By Installer)

F. Strip-In or Cap Sheet (By Installer)

GAF MATERIALS CORPORATION


1361 Alps Road - Wayne, New Jersey 07470 - Phone: (973) 628-3000 www.gaf.com






STEP 1: Installing Anchor Cleat

Place the top lip of the continuous anchor cleat squarely on the top edge of the base ply and treated wood nailing plate. Press cleats securely in position and nail through the pre-punched holes with 1-1/2" ss ring shank nails provided. Install anchor cleats by butting cleats at each corner. For miter application, fit into corner as required to maintain a continuous anchor cleat line. Then nail at a min. 6" on center in each direction from the corner or closer at special conditions.

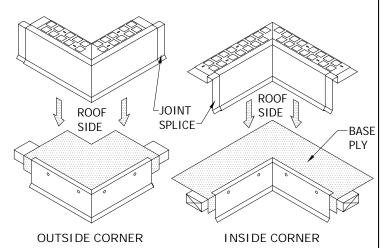


STEP 2: Installing Fascia Miters

Locate the miters and concealed joint splices for the appropriate corners. Place a concealed joint splice under each end of the miter sections. Install the miter by hooking the drip of the fascia miter onto the drip of the cleat and rotate back onto the roof. Fasten with 1-1/2" ss ring shank nails provided in pre-punched holes.

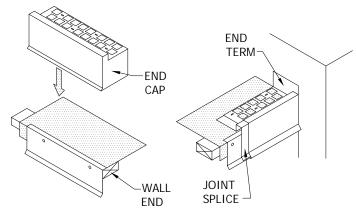


STEP 3: Installing Fascia End Caps and End Terms
Install the fascia end caps and end terms by hooking the drip of the
fascia onto the drip of the cleat and rotate back onto the roof.
Fasten with 1-1/2" ss ring shank nails provided in pre-punched holes.

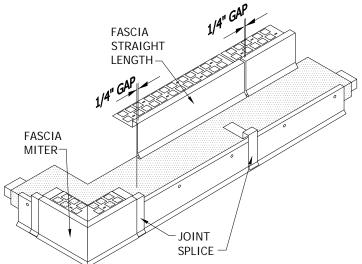

STEP 4: Installing Fascia Straight Lengths

Place a concealed joint splice in the opposite end of the installed miter or end cap. Install the fascia by hooking the drip of the fascia onto the drip of the cleat and rotate back onto the roof. Fasten with 1-1/2" ss ring shank nails provided in pre-punched holes. <u>Allow a 1/4" gap between fascia sections for thermal expansion</u>. Lengths of all straight pieces should be considered prior to cutting to avoid creating relatively short sections of fascia adjacent to full length sections.

Note: there should be a joint splice at every joint.

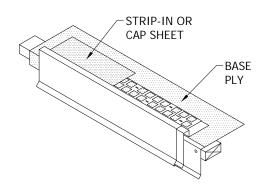

STEP 5: Installing Strip-In or Cap Sheet
Install strip-in ply or cap sheet per roofing manufacturer's instructions.