


**20 YEAR MAX
WARRANTY**



NOTE:

1. EVERGUARD® TPO COVER TAPE HEAT-WELD ONLY TO BE USED WITH EVERGUARD® TPO MEMBRANE
2. 25-YEAR GUARANTEES AND ABOVE MUST USE EXTREME ACCESSORIES.
3. PRIME THE METAL ONLY WITH EVERGUARD® TPO PRIMER. DO NOT SPILL PRIMER ON WELDED SEAM AREA.
4. HEAT-WELD THE MEMBRANE (NON-ADHESIVE SIDE ONLY) TO MEMBRANE AREA USING EITHER A ROBOTIC OR HAND WELDER TO SPEC.
5. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A HARD BOARD IS REQUIRED ON MECHANICALLY FASTENED SYSTEMS ONLY.
6. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO EVERGUARD® DETAIL 115).

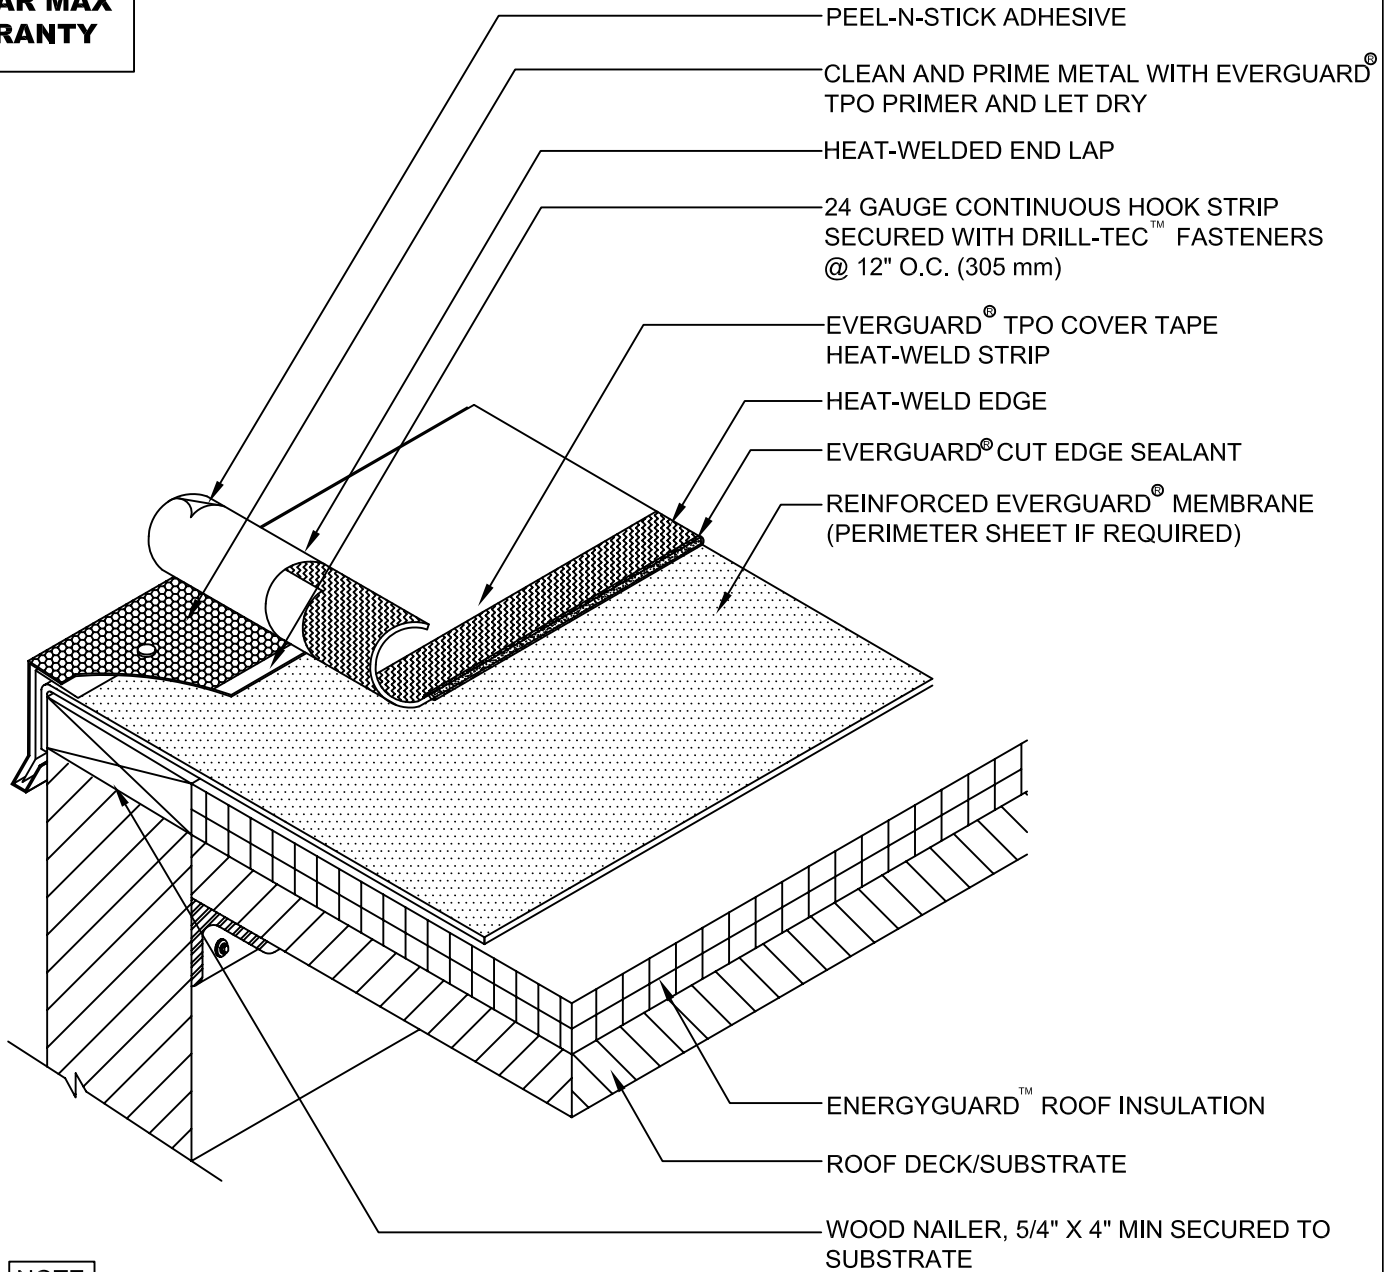

WWW.GAF.COM
1 Campus Drive.
Parsippany, NJ 07054

EverGuard
SINGLE-PLY ROOFING SYSTEMS
ROOF EDGE SERIES

DRAWING #

218

SCALE
N.T.S.

**TPO COVER TAPE HEAT-WELD STRIP
OVERLAP AT ROOF EDGE DETAIL**

THIS DETAIL APPLIES TO:
Adhered Systems
Mechanically Attached
Systems
TriPosite Systems

REVISION DATE
6-20-16