


REAR VIEW OF SCUPPER

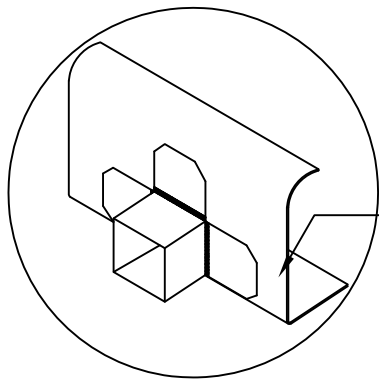

REINFORCED EVERGUARD®
MEMBRANE

REINFORCED EVERGUARD®
MEMBRANE

PREMANUFACTURED
EVERGUARD® TPO SCUPPER
FASTENED WITH 4 FASTENERS
OR 12" (305 mm) O.C.

DRILL-TEC™ FASTENERS 12" (305
mm) O.C. FOR BA SYSTEMS 6"
(152 mm) O.C.

REINFORCED EVERGUARD®
MEMBRANE (PERIMETER
SHEET IF REQUIRED)

ENERGYGUARD™ ROOF
INSULATION

ROOF DECK/SUBSTRATE

CONTINUOUS PERIMETER
HEAT-WELDED LAP

NOTE:

1. DETAIL TO BE USED IN CONJUNCTION WITH STANDARD GUIDE SPECIFICATION CONTAINING REQUIREMENTS FOR NAILERS, INSULATION ETC..
2. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A HARD BOARD IS REQUIRED ON MECHANICAL SYSTEMS ONLY.
3. FOR SELF-ADHERED RAPIDSEAM™ TECHNOLOGY SYSTEMS, SEE EVERGUARD DETAIL 330 FOR LAP APPLICATION.
4. 25 YEAR GUARANTEES AND ABOVE MUST USE EXTREME ACCESSORIES
5. ALTERNATE BASE ATTACHMENT



EverGuard
SINGLE-PLY ROOFING SYSTEMS
PARAPET WALL &
CURB SERIES

DRAWING #

324

SCUPPER - PREMANUFACTURED

THIS DETAIL APPLIES TO:
Adhered Systems
Ballasted Systems
Mechanically Attached Systems
Self - Adhered Systems
(Heat-Weld Only)
TriPosite Systems

www.gaf.com
1 Campus Drive,
Parsippany, NJ 07054

SCALE
N.T.S.

TPO ONLY

REVISION DATE
6-24-15