

# WorkHorse™ RoofMatch® SBS Granular

GAF Ruberoid Spec Manual

Updated: 7/08



*Your Best And Safest Choice...  
Quality You Can Trust Since 1886!*



# WORKHORSE<sup>TM</sup> ROOFMATCH<sup>®</sup> SBS GRANULAR

## Description

ROOFMatch<sup>TM</sup> SBS Granular membranes are tough, resilient modified bitumen membranes manufactured to stringent specifications. The core is a strong, resilient, non-woven polyester mat that is coated with flexible, SBS polymer-modified asphalt and is surfaced with mineral granules.

## Uses


ROOFMatch<sup>TM</sup> SBS Granular is designed for new roofing and reroofing applications as well as the construction of flashings. ROOFMatch<sup>TM</sup> SBS Granular is also an ideal product for repairs of built-up roofing membranes or other modified bitumen systems.

## Advantages

- Typical system guarantees available for up to 15 years, select system constructions available with up to 20 year guarantee coverage.
- Cost effective—the installed cost of ROOFMatch<sup>TM</sup> SBS Granular is less than most single-ply systems on the market today.
- Lightweight—installed roof designs weigh less than 2 pounds per square foot.
- Durable—specially formulated modified asphalt for lasting performance.

## Advantages (Continued)

- Resilient—ROOFMatch<sup>TM</sup> SBS Granular's polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.
- ROOFMatch<sup>TM</sup> SBS Granular is backed by GAF Materials Corporation, a company with over 100 years in the roofing business.
- Available in five granular colors; hickory, shakewood, slate, weathered wood and tan.

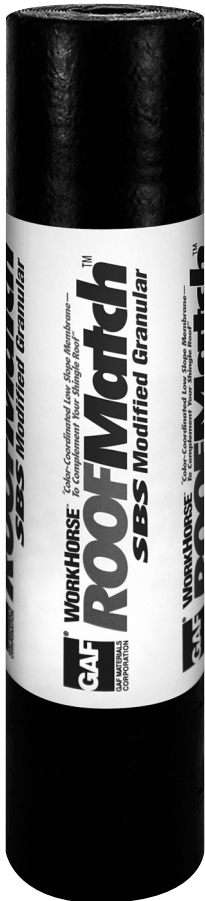

## Applicable Standards

Meets ASTM D6164, Type I, Grade G
FM Approved
ICC Pending
Miami-Dade County Product Control Approval
UL/ULc Listed

## Products Specifications (nominal)

Roll Size	1 square (106.5 gross sq.ft.) (9.8m <sup>2</sup> )
Roll Length	33.25' (10.2m)
Roll Width	39.625" (1.0m)
Approx. Roll Weight	102 lbs (46kg)
Product Thickness	0.150" (3.8mm)

This product meets or exceeds the following ASTM D6164, Type I, Grade G minimum requirements:

Property	Test Method	Value
Tensile Strength @ 0°F (min), lbf/in	ASTM D5147	70
Elongation @ 0°F (nom.), %	ASTM D5147	20
Low Temperature Flexibility (max.), °F	ASTM D5147	0
Tear Strength (min), lbf	ASTM D5147	55
Dimensional Stability, (max) %	ASTM D5147	1

See GAFMC Applications and Specification Manual or UL Directory for specific approvals