

WorkHorse™ ROOFMatch® SBS Granular

Data Sheet

Updated: 1/10



*Quality You Can Trust Since 1886...
From North America's Largest Roofing Manufacturer™*



WORKHORSE™ ROOFMATCH™ SBS GRANULAR

Description

ROOFMatch™ SBS Granular membranes are tough, resilient modified bitumen membranes manufactured to stringent specifications. The core is a strong, resilient, non-woven polyester mat that is coated with flexible, SBS polymer-modified asphalt and is surfaced with mineral granules.

Uses

ROOFMatch™ SBS Granular is designed for new roofing and reroofing applications as well as the construction of flashings. ROOFMatch™ SBS Granular is also an ideal product for repairs of built-up roofing membranes or other modified bitumen systems.

Advantages

- Typical system guarantees available for up to 15 years, select system constructions available with up to 20 year guarantee coverage.
- Lightweight—installed roof designs weigh less than 2 pounds per square foot.
- Durable—specially formulated modified asphalt for lasting performance.

Advantages (Continued)


- Resilient—ROOFMatch™ SBS Granular's polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.
- ROOFMatch™ SBS Granular is backed by GAF Materials Corporation, a company with over 100 years in the roofing business.
- Available in five granular colors; hickory, shakewood, slate, weathered wood and tan.

Applicable Standards

Meets ASTM D6164, Type I, Grade G
FM Approved
Miami-Dade County Product Control Approval
UL/ULc Classified

Products Specifications (nominal)

Roll Size	1 square (107.5 gross sq.ft.) (9.99m ²)
Roll Length	32.56' (9.92m)
Roll Width	39.625" (1.0m)
Approx. Roll Weight	90 lbs (40.82kg)
Product Thickness	0.140" (3.56mm)

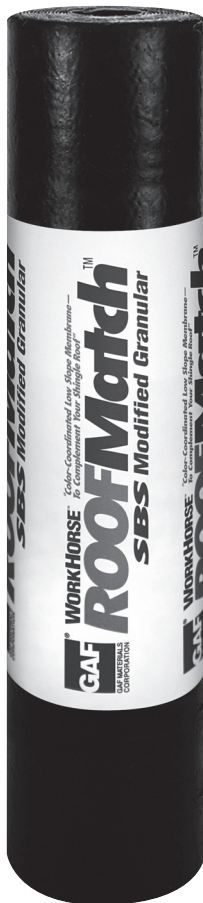

This product meets or exceeds the following ASTM D6164, Type I, Grade G, minimum requirements:

Property	Test Method	Value
Tensile Strength @ 0°F (min), lbf/in	ASTM D5147	70
Elongation @ 0°F (nom.), %	ASTM D5147	20
Low Temperature Flexibility (max.), °F	ASTM D5147	0
Tear Strength (min), lbf	ASTM D5147	55
Dimensional Stability, (max) %	ASTM D5147	1

See GAFMC Applications and Specification Manual or UL Directory for specific approvals