

**ROOFMATCH™**  
**SBS MODIFIED GRANULAR**  
**CAP SHEET**  
**Data Sheet**

Updated: 8/13



*Quality You Can Trust...From  
North America's Largest Roofing Manufacturer!™*

***gaf.com***



# ROOFMATCH™

## SBS MODIFIED GRANULAR CAP SHEET

### Description

ROOFMatch™ SBS Modified Granular Cap Sheets are tough, resilient modified bitumen membranes manufactured to stringent specifications. The core is a strong, resilient, non-woven polyester mat that is coated with flexible, SBS polymer-modified asphalt and surfaced with mineral granules.

### Uses


ROOFMatch™ SBS Modified Granular Cap Sheet is designed for new roofing and reroofing applications as well as the construction of flashings. It is also an ideal product for repairs of built-up roofing membranes or other modified bitumen systems.

### Advantages

- Typical system guarantees available for up to 15 years; select system constructions available with up to 20-year guarantee coverage.\*
- Lightweight—installed roof designs weigh less than 2 pounds per square foot.
- Durable—specially formulated modified asphalt for lasting performance.

### Advantages (Continued)

- Resilient—the polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.
- Backed by GAF—a company with over 100 years in the roofing business.
- Available in five granular colors: hickory, shakewood, slate, weathered wood, and tan.

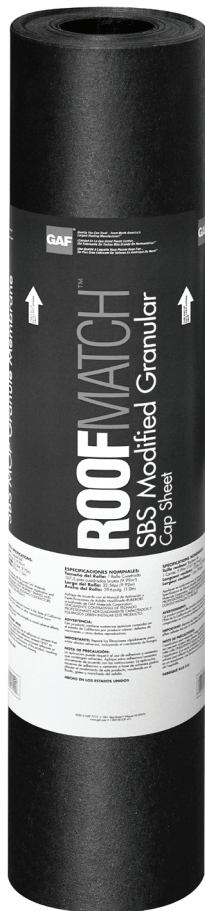

### Applicable Standards

Meets ASTM D6164, Type I, Grade G
FM Approved
Florida Building Code Approved
Miami-Dade County Approved
UL Classified. See complete marking on product.

### Product Specifications (nominal)

Roll Size	1 square (107.5 gross sq. ft.) (9.99 m <sup>2</sup> )
Roll Length	32.56' (9.92 m)
Roll Width	39.625" (1.0 m)
Approx. Roll Weight	90 lbs (40.82 kg)
Product Thickness	0.140" (3.56 mm)

\*See applicable GAF guarantee for complete coverage and restrictions.

This product meets or exceeds the following ASTM D6164, Type I, Grade G, minimum requirements:

Property	Test Method	Value
Tensile Strength @ 0°F (min), lbf/in	ASTM D5147	70
Elongation @ 0°F (nom.), %	ASTM D5147	20
Low Temperature Flexibility (max.), °F	ASTM D5147	0
Tear Strength (min), lbf	ASTM D5147	55
Dimensional Stability, (max) %	ASTM D5147	1