


RAPID SEAM™ MAX 10 YR GUARANTEE



NOTE:

1. MINIMUM SLOPE IS 2:12.
2. TO MAKE A SEAM ON RAPID SEAM™ WITHOUT RAPID SEAM™ PRESENT, YOU MUST USE GAF CLEANER AS WELL AS GAF PRIMER TO PREP THE AREA.
3. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES (REFER TO DETAIL FD 115) AND ALL RAPIDSEAM™ SEAMS.

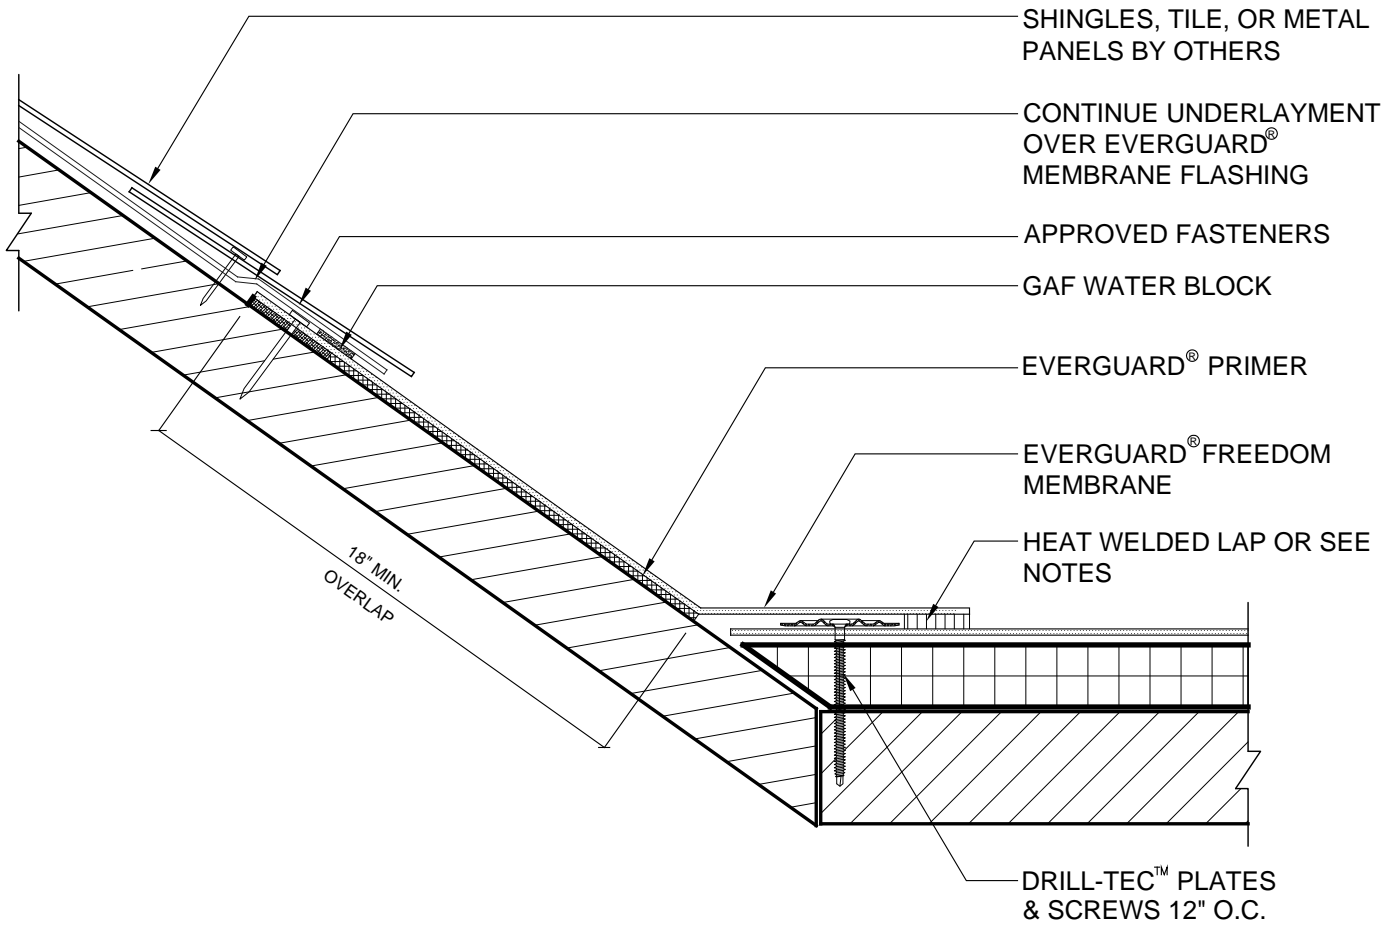

SPECIAL
CONSTRUCTION
SERIES

TERMINATION AT SLOPED ROOF

HEATWELD & RAPIDSEAM

DRAWING #

601

SCALE

N.T.S.

SYSTEM

FD

ISSUE/ REVISION DATE

3-1-10