


STRAPPING METHOD
*see note #5



NOTE:

1. END LAPS SHOULD BE STAGGERED A MINIMUM 36" IN ADJACENT COURSES TO PREVENT THEM FROM LINING UP
2. FASTEN 6" O.C FOR SLOPE 4:12 AND OVER
3. DECK ARMOR™ ROOF DECK PROTECTION MECHANICALLY ATTACHED AS REQUIRED BY CODE
4. VERSASHIELD™ UNDERLAYMENT OPTIONAL OVER WOOD DECK TO ACHIEVE CERTAIN FIRE RATINGS
5. STRAPPING METHOD - RUN MEMBRANE PARALLEL TO THE SLOPE.

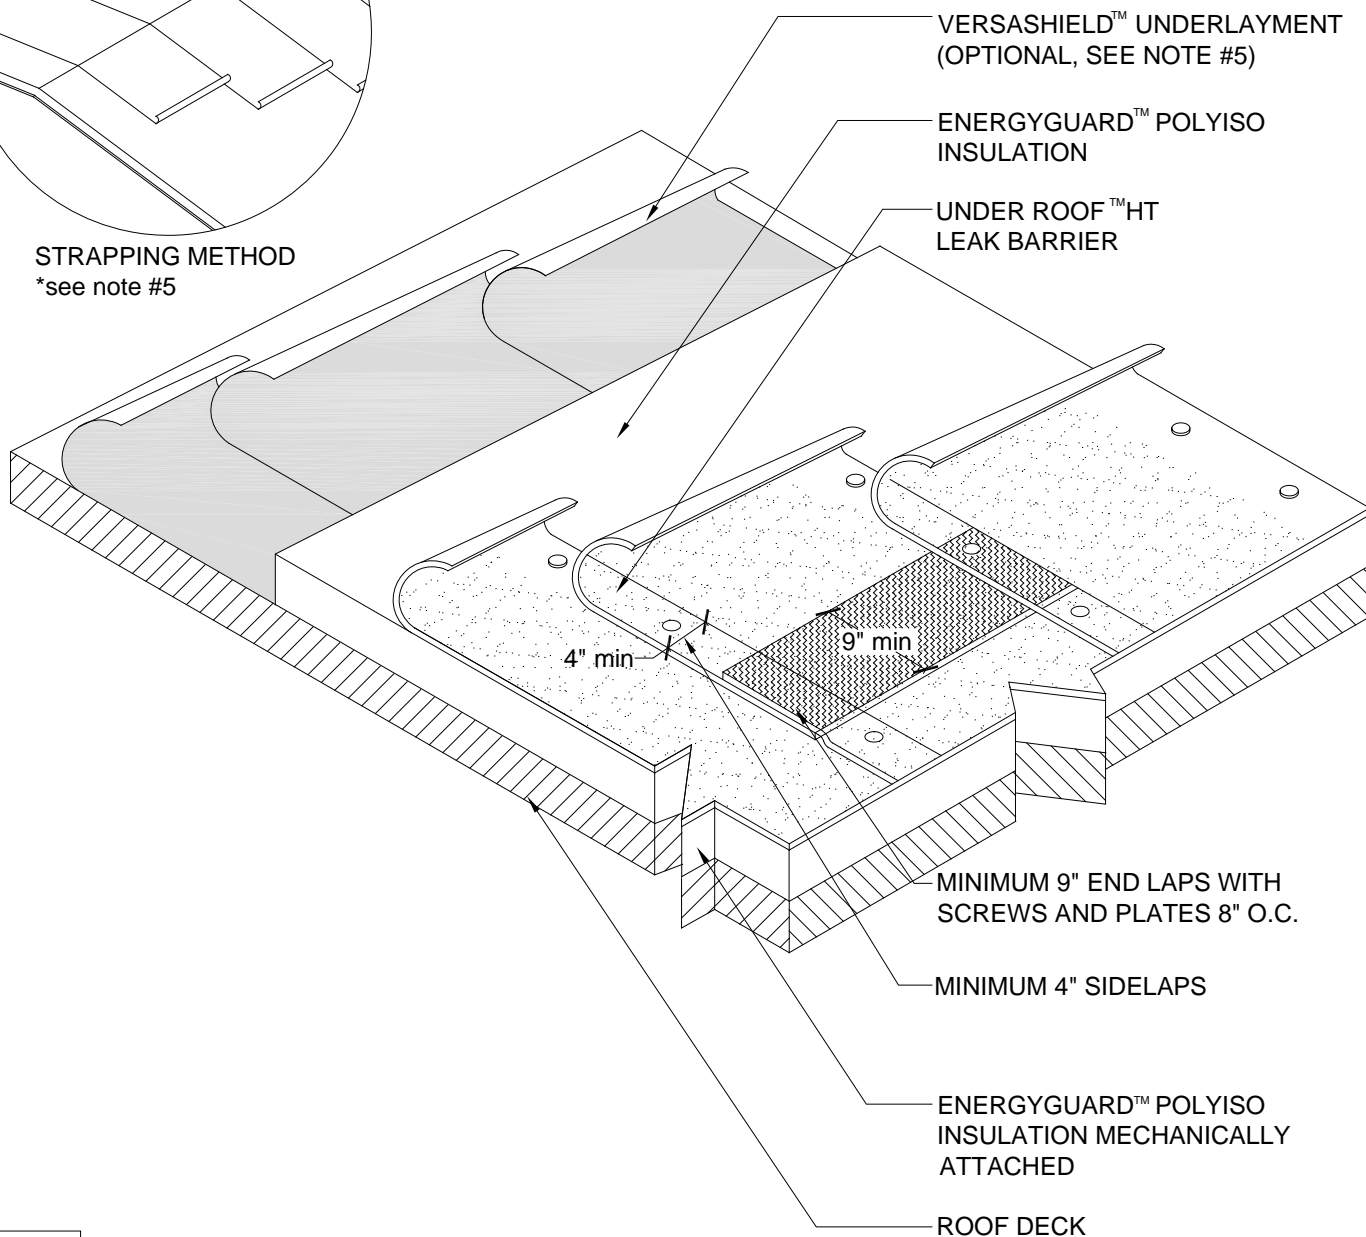

UNDERROOF™ HT
HIGH TEMPERATURE LEAK BARRIER

FIELD OF
ROOF SERIES

METAL ROOF UNDERLAYMENT LAYOUT
OVER INSULATED DECK

BLUE DIAMOND GUARANTEE

DRAWING #

101

SCALE
N.T.S.

SYSTEM

UNDHT

ISSUE/ REVISION DATE
1-1-11