


Center full width roll of GAF leak barrier. Do not place fasteners within 6" (152mm) of center line. Horizontal laps must be at least 6" (152mm).

Carry GAF underlayment at least 6" (152mm) over GAF leak barrier.

Run starter strip across valley at least 12" (305mm) and weave with opposite side starter strip and shingle.

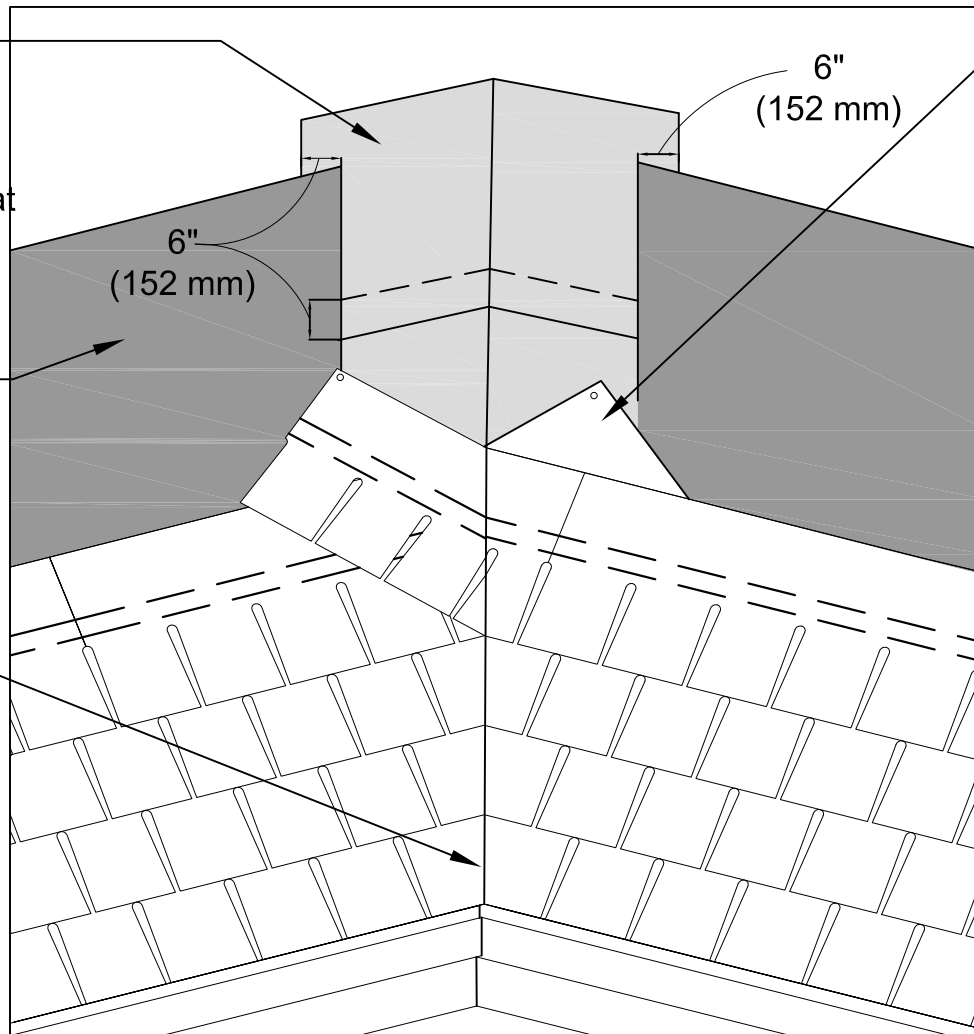

Extend end of shingle at least 12" (305mm) beyond valley center line. Before nailing, firmly press shingles down at valley center to conform to valley shape. Nail, putting extra fastener in top corner of shingle. Due to the extreme water volume in valleys, nails near the center can leak.

**CAUTION:** Do not locate nails closer than 6" (152mm) to the valley center line.



1361 Alps Rd.  
Wayne, NJ 07470  
www.gaf.com

BRAND SERIES

**SLATELINE  
SERIES**  
Lifetime Shingles

REVISION DATE

1-01-12

SCALE

N.T.S

# WOVEN VALLEY DETAIL

DETAIL NUMBER

**11**

DETAIL REFERENCE

**SS-SLT**