


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"
(102mm)

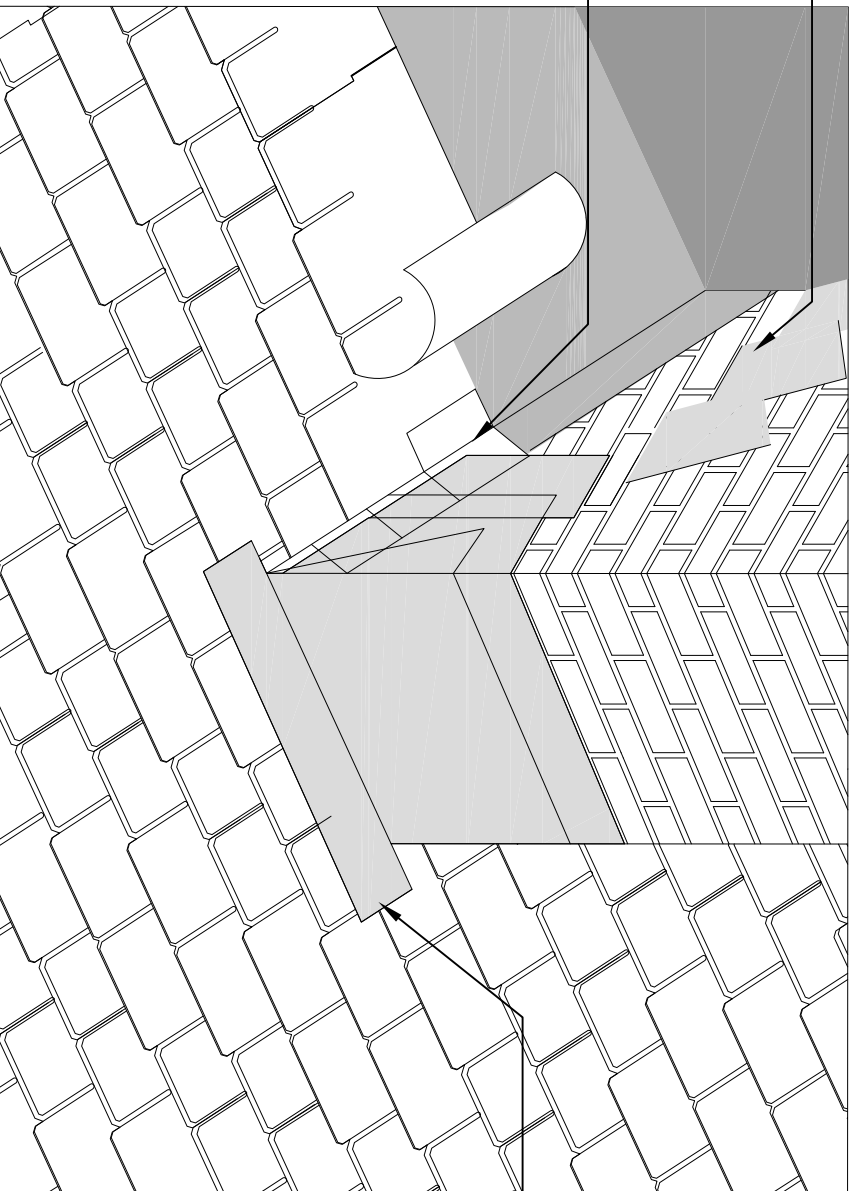

1 Campus Drive
Parsippany, NJ 07054
www.gaf.com

BRAND SERIES
WOODLAND
SERIES
Lifetime Shingles

REVISION DATE
10-30-17

SCALE
N.T.S

CHIMNEY FLASHING DETAIL

07

DETAIL REFERENCE
SS-WLD