

# FireOut™ Fire Barrier Coating

Sell Sheet

Updated: 6/05



*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*

**Major Breakthrough In Fire Prevention Technology!**

**“Now, get UL Class A  
fire protection  
for your wood deck—  
*in a bucket!*”**

- Better, cheaper, faster, & safer
- Eliminate costly recover boards
- No need for time-consuming slip sheets


***Roller,  
squeegee,  
or sprayer  
application***



**Quality You Can Trust Since 1886...  
from North America's  
Largest Roofing Manufacturer**

# Eliminate costly recover boards and slip sheets with FireOut™ Fire Barrier Coating!

FireOut™ Coating costs  
**as much as 43% less**  
to install than slip sheets  
or gypsum boards!

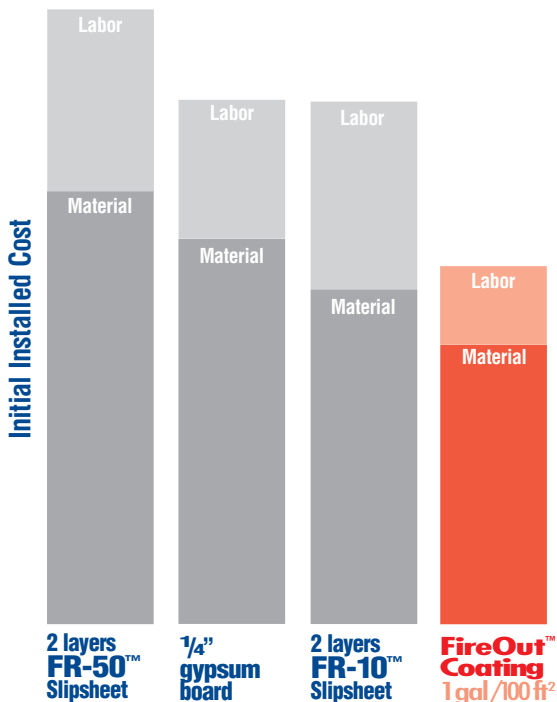

FireOut™ Fire Barrier Coating is a low VOC, water-based coating system that provides outstanding flame spread and penetration protection to combustible roof decks in the event of fire.

- **Patent Pending Technology...**  
Special intumescent additives minimize flame spread in the event of fire
- **Provides UL Class A Performance\*...**  
in mechanically attached and self-adhered TPO, PVC, and modified bitumen systems
- **Self Extinguishing...**  
Active coating expands in the presence of heat or flame to form a protecting, self-extinguishing layer
- **Installs up to 130% Faster...**  
Simple, one step application installs in less than half the time of a gypsum board or fire resistant slip sheet application
- **Up to 43% Lower Installed Cost...**  
versus gypsum boards or multiple layers of slip sheets
- **Safer Installation ...**  
Less material on the roof, no loose edges
- **Keeps the Roof Drier...**  
seamless, breathable coating will not trap water if it rains before roof membrane installation
- **Easy Application...**  
choose from spray, roller, or squeegee for maximum versatility
- **Stays Flat...**  
fully bonded to the substrate, can't wrinkle, curl or lift
- **Lightweight...**  
less than 10% of the weight of recover board

## Specifications (nom.)

Application rate: 1.0 gal/100 ft² min.  
Permeance: 7.8 perms  
Color (wet/dry): pink/brick red  
Unit sizes: 5 gal (11.9L) and 55 gal (208L)



\*Refer to the current UL Roofing Material and Systems Directory for specific listings.  
Note: FR-10 and FR-50 are trademarks of Atlas Roofing Corporation



Visit Us At [www.gaf.com](http://www.gaf.com)  
Quality You Can Trust Since 1886...  
from North America's  
Largest Roofing Manufacturer

**FireOut™**  
FIRE BARRIER COATING