

# GAF Ruberoid® SA FR Cap Sheet Data Sheet

Data Sheet

Updated: 10/10



*Quality You Can Trust Since 1886...  
From North America's Largest Roofing Manufacturer™*



# RUBEROID®

## SA FR CAP SHEET

### Description

RUBEROID® SA FR Cap Sheet is a durable, self-adhering modified bitumen membrane designed and manufactured to meet industry and code requirements. The product is designed for use as a waterproofing membrane and is reinforced with a polyester mat, which is coated with a polymer-modified asphalt. RUBEROID® SA FR Cap Sheet is a granule-surfaced roofing membrane designed to be used with RUBEROID® SA Base/Ply or Liberty™ MA Mechanically Attached Base Sheet to provide long-lasting protection for the low-slope areas of your property. System guarantees are available for up to 20 years. RUBEROID® SA Systems are applied with out torches, open flames, hot asphalt, or messy solvent-based adhesives and are suitable for primed plywood decks and many other substrates. Technical and Sales information can be obtained through the GAFMC Contractor Services Hotline, (800) 766-3411.

### Application

RUBEROID® SA FR Cap Sheet is applied to approved substrates using its unique self-adhering formulation.

### Applicable Standards


Meets Performance Requirements of ASTM D6164, Type I, ASTM D1970
ICC Pending
UL/ULc Listed
FM Approved

### Products Specifications (nominal)

Roll Size	1 square (111.6 gross sq.ft.) (10.4m <sup>2</sup> )
Roll Length	34.0' (10.4m)
Roll Width	39.375" (1.0m)
Approx. Roll Weight	99 lbs (44kg)
Product Thickness	0.157" (4mm)

This product meets or exceeds the following ASTM D6164, Type I, minimum requirements:

Property	Test Method	Value
Tensile Strength @ 0°F (min), lbf/in	ASTM D5147	70
Elongation @ 0°F (nom.), %	ASTM D5147	20
Low Temperature Flexibility (max.), °F	ASTM D5147	0
Tear Strength (min), lbf	ASTM D5147	55
Dimensional Stability, (max) %	ASTM D5147	1

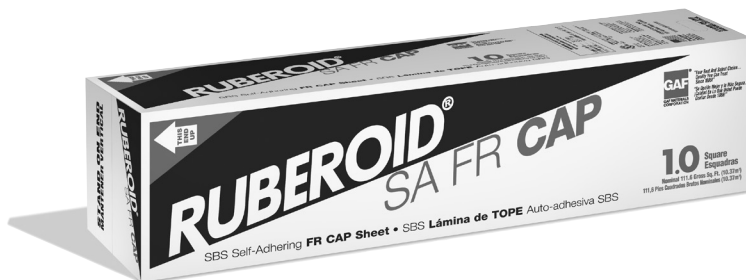

Data reported based on available independent and in-house resources. GAFMC reserves the right to change or modify, at its discretion, and without prior notice, any of the information, requirements, specifications or policies contained in this document.