

EverGuard® TPO  
Roll Accessories  
TPO Expansion Joints  
Data Sheet

Updated: 9/09



**Quality You Can Trust Since 1886...**  
**From North America's Largest Roofing Manufacturer!™**

### Description

EverGuard<sup>®</sup> TPO single ply roofing system roll accessories provide roofing contractors an easy-to-install, factory-built detail. EverGuard<sup>®</sup> roll accessories are constructed from GAF's proven durable EverGuard<sup>®</sup> TPO single-ply reinforced membrane.

- **Cost effective...** Reduces installed costs
- **Improved Reliability...** Factory-built accessories reduce risk of leaks and callbacks
- **Improved aesthetics...** Uniform look

### Application

EverGuard<sup>®</sup> TPO expansion joints are available in two prefabricated styles: roof to roof and roof to wall. They are heat weldable to EverGuard<sup>®</sup> TPO membrane forming a strong monolithic bond.

### Product Information

EverGuard<sup>®</sup> TPO expansion joints are provided in roof to roof or roof to wall configurations. Standard roll length is 50 feet. The membrane thickness is 60 mil nominal.


### Measuring Tips

When ordering TPO expansion joints it is important to specify the correct bellows width.

1. Measure the opening distance of the joint
2. Multiply this distance by 1.5
3. Round up to next even number, this is the bellows width.

### Example:

Width = 3.325"  
 Multiply 3.325 X 1.5 = 4.9875  
 Order next even number larger  
 bellows = 6"

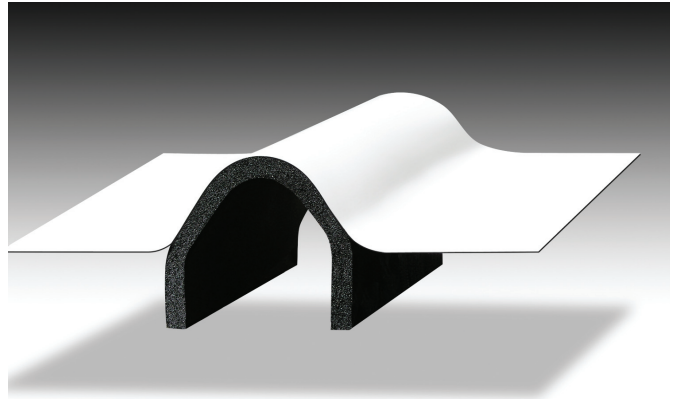


## TPO Expansion Joints

- Available in 5 Standard bellows widths
- Available in 2 Styles
  - Wall-to-Roof
  - Roof-to-Roof
- Custom sizes and Colors also available

### Also Available...




Fluted Corner




Inside Corner



Vent Boot



Universal Corner

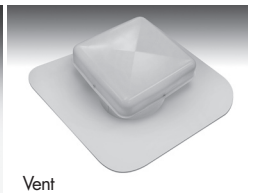

Vent