


**RAPID SEAM™ MAX 10 YR GUARANTEE**



**NOTE:**

1. MINIMUM SLOPE IS 2:12.
2. TO MAKE A SEAM ON RAPID SEAM™ WITHOUT RAPID SEAM™ PRESENT, YOU MUST USE GAF CLEANER AS WELL AS GAF PRIMER TO PREP THE AREA.
3. APPLY EVERGUARD® TPO CUT EDGE SEALANT TO ALL CUT REINFORCED TPO EDGES ( REFER TO DETAIL FD 115 ) AND ALL RAPIDSEAM™ SEAMS.

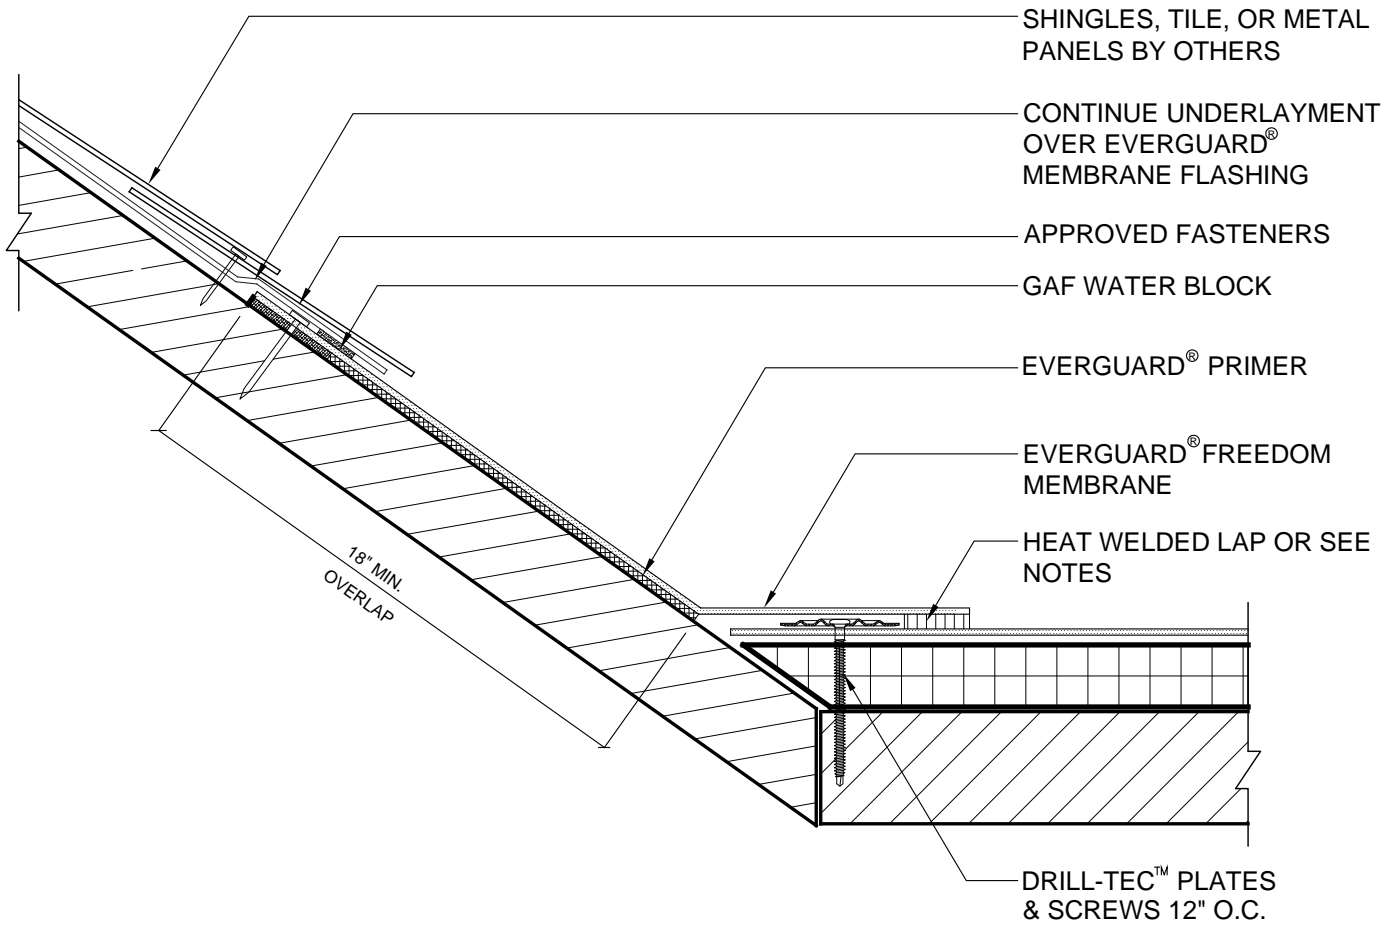

SPECIAL  
CONSTRUCTION  
SERIES

**TERMINATION AT SLOPED ROOF**

HEATWELD & RAPIDSEAM

DRAWING #

**601**

SCALE

N.T.S.

SYSTEM

**FD**

ISSUE/ REVISION DATE

3-1-10