
Crickets should extend at least 6" (152 mm) up the back of the chimney.

Seal shingles to metal flange with asphalt plastic cement.

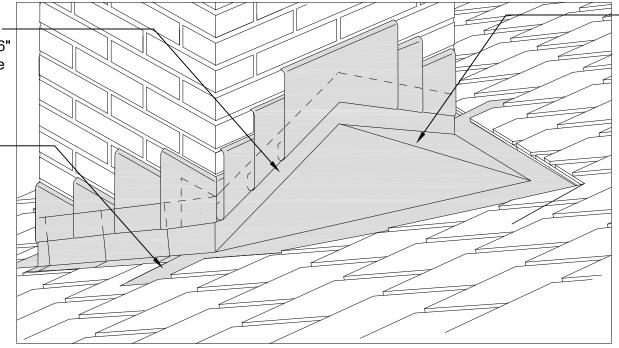

-Cricket ridge should be at least 12" (305mm).

Cricket flange should be at least 18" 457mm) up roof deck.

<b>GAF</b>	
1361 Alps Rd. Wayne, NJ 07470 www.gaf.com	

**ROYAL** SOVEREIGN

BRAND SERIES

REVISION DATE

SCALE 1-01-12 N.T.S CHIMNEY CRICKET FLASHING DETAIL

DETAIL NUMBER

DETAIL REFERENCE

SS-RS