



**20 YEAR MAX
GUARANTEE**

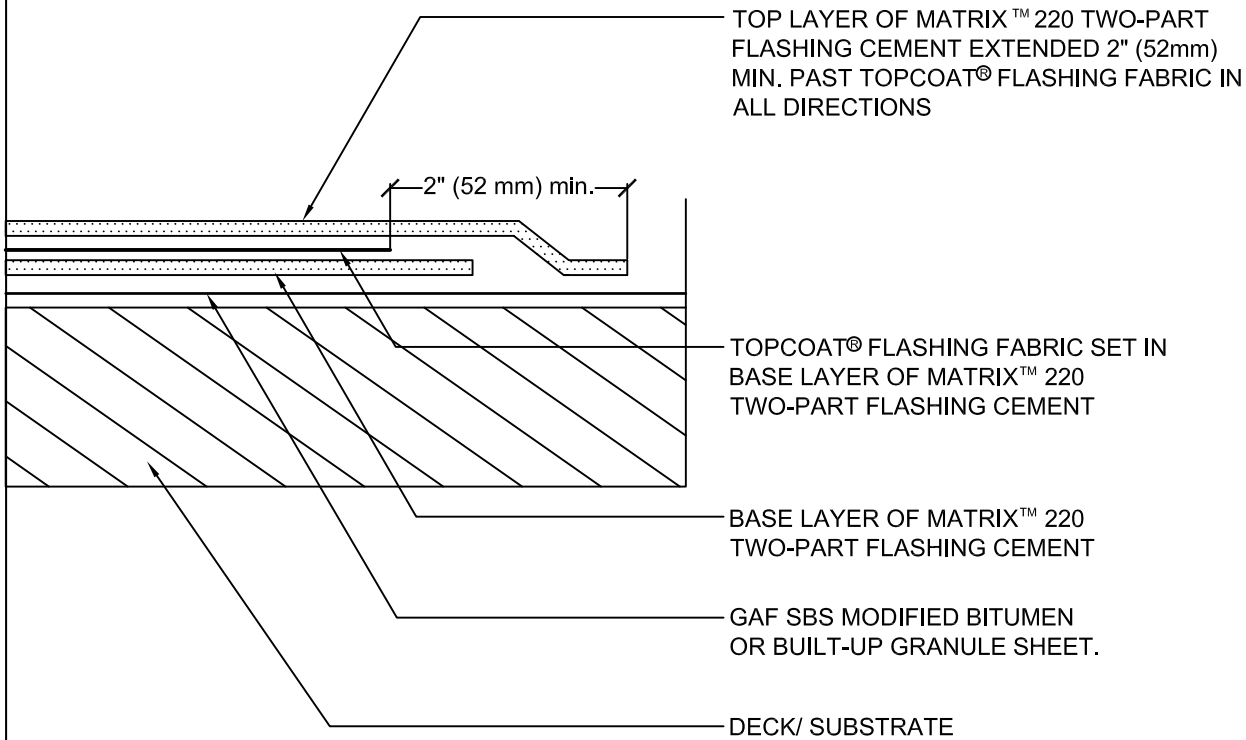

NOTE:

1. APPLICATION SURFACE SHOULD BE CLEAN OF SURFACE DEBREE PRIOR TO APPLICATION. FOR PENETRATIONS, POWER CLEAN PRIOR TO APPLICATION.
2. IF GAF GRANULE MEMBRANE IS LEFT EXPOSED OVERNIGHT BEFORE INSTALLING MATRIX™ 220 2-PART FLASHING CEMENT, A TEMPORARY NIGHT SEAL MUST BE INSTALLED. THE NIGHT SEAL MUST BE COMPLETELY REMOVED BEFORE INSTALLING THE FLASHING.
3. AFTER FULLY CURED, SWEEP LOSE GRANULES FROM FLASHING AREA.

 <small>www.gaf.com 1 Campus Drive Parsippany, NJ 07054</small>	MATRIX™ 220 TWO-PART FLASHING CEMENT	MATRIX™ 220 SYSTEM DETAIL	DRAWING # 101	SYSTEM MX220
	FIELD OF ROOF SERIES		SCALE N.T.S.	ISSUE/ REVISION DATE 6-1-15