

# Tri-Ply<sup>®</sup> APP Granule Membrane Data Sheet

Updated: 5/16




*Quality You Can Trust...From  
North America's Largest Roofing Manufacturer!™*



# TRI-PLY®

## APP Granule Membrane (Formerly Tri-Ply® TP-4G)

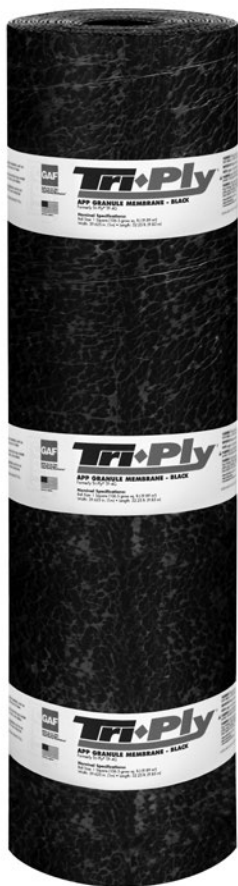

### Description

Tri-Ply® APP Granule Membrane is a granule-surfaced modified bitumen membrane manufactured to stringent GAF specifications. Its core is a strong, resilient, non-woven polyester mat that is coated with weather-resistant APP polymer-modified asphalt.

### Uses

Tri-Ply® APP Granule Membrane is designed for new roofing and reroofing applications, as well as flashings. It is also ideal for repair of built-up roofing membranes or other modified bitumen systems.

### Advantages

- Lightweight... installed roof designs weigh less than 2 pounds per square foot (9.8 kg per square meter).

### Advantages (Continued)

- Resilient... polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.
- Durable... specially formulated modified asphalt for lasting performance.

### Applicable Standards

Meets ASTM D6222, Type I, Grade G

FM Approved

Miami-Dade County Product Control Approved

UL Listed

### Nominal Specifications

Roll Size	1 square roll 106.4 gross sq. ft. (9.89 m <sup>2</sup> )
Roll Length	32.25' (9.83 m)
Roll Width	39.6" (1 m)
Roll Weight	99 lb. (44.9 kg)