

Tri-Ply[®] APP Smooth Membrane Data Sheet

Updated: 5/16




*Quality You Can Trust...From
North America's Largest Roofing Manufacturer!™*



TRI-PLY®

APP Smooth Membrane (Formerly Tri-Ply® TP-4)

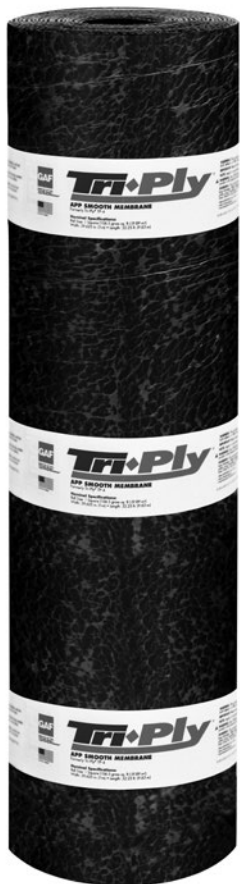

Description

Tri-Ply® APP Smooth Membrane is a smooth surface modified bitumen membrane manufactured to stringent GAF specifications. Its core is a strong, resilient, non-woven polyester mat that is coated with weather-resistant APP polymer-modified asphalt.

Uses

Tri-Ply® APP Smooth Membrane is designed for new roofing and reroofing applications, as well as flashings. It is also an ideal product for repair of built-up roofing membranes or other modified bitumen systems.

Advantages

- Lightweight... installed roof designs weigh less than 2 pounds per square foot (9.8 kg per square meter).

Advantages (Continued)

- Resilient... polyester mat core allows it to resist splits and tears due to its pliability and elongation characteristics.
- Durable... specially formulated modified asphalt for lasting performance.

Applicable Standards

Meets ASTM D6222, Type I, Grade S
Miami-Dade County Product Control Approved
FM Approved
UL Listed

Nominal Specifications

Roll Size	1 square roll 106.5 gross sq. ft. (9.8 m ²)
Roll Length	32.6' (9.9 m)
Roll Width	39.6" (1.0 m)
Roll Weight	83.2 lb. (37.7 kg)