Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge

Remove excess heat and moisture from the attic and protect the roof system from premature deterioration

- Help reduce damaging heat and moisture in the attic
- Avoid premature roof system deterioration
- Limit the growth of harmful mold and mildew

GAF Cobra® RigidVent3™
Premium Exhaust Vent for Roof Ridge

Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge

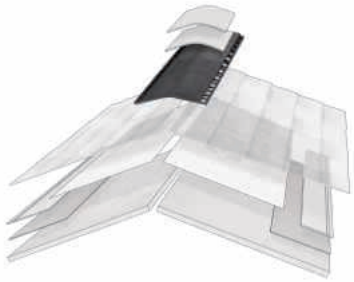

Benefits:

- **Allows heat and moisture to escape** at the most effective location — the ridge
- **Shingle-over design** blends into the ridge line
- **Engineered for durability** with UV-resistant polymers
- **External baffles** with crush-resistant internal structure
- **Includes 3" corrosion-resistant ring shank nails on each vent** for proper fastening of the vent and cap shingles

- **Unique EasyTear® sizing feature** allows you to hand-tear the vent in 3" increments — less cutting and waste

- **Passes the 110 mph wind-driven rain test** per TAS 100(A) [1]
- **Eligible for up to a Lifetime† Limited Warranty** when installed with GAF Lifetime† shingles and at least two additional qualifying GAF accessories, and it's also eligible for residential enhanced warranty coverage[3]

Balanced Ventilation:

Balanced attic ventilation means there's an equal amount of air entering it as there is exiting it. The amount of exhaust ventilation must **never** exceed the amount of intake ventilation at the soffits or eaves. GAF recommends a minimum of 1 sq. ft. of net free ventilation for every 300 sq. ft. of attic floor space. Always consult local building codes for specific ventilation requirements.

How much do I need?

Calculate the total square footage of your attic floor space and then review the chart below for how much Cobra® Rigid Vent 3™ Premium Exhaust Vent for Roof Ridge is needed:

Total attic sq. footage	Recommended length of Cobra® Rigid Vent 3™ Exhaust Vent (ft.)	Minimum intake ventilation (net free area in sq. in.)
1,600	22	396
1,900	26	468
2,200	30	540
2,500	34	612
2,800	38	684
3,100	42	756
3,400	46	828

Note: Chart above based on 1/300 rule. Always have a balanced attic ventilation system. In no case should the amount of exhaust ventilation at or near the ridge exceed the amount of intake ventilation at or near the soffit. Visit **gaf.com/ventcalculator** for more details.

To learn more about the Lifetime† Roofing System, visit **gaf.com/Lifetime**

Product details:

Non-filtered — for use in warmer climates

- 11.5" width — for 12"-width ridge cap shingles
- 9" width — for 10"-width ridge cap shingles
- 18 sq. inches per linear foot of net free ventilating area
- Hand-nail installation with included 3" corrosion-resistant ring shank nails
- For roof pitches 3:12 to 16:12

Code approvals:

- Miami-Dade County Product Control Approved
- State of Florida Approved
- UL ER15072-01
- Texas Department of Insurance Product Evaluation RV-29
- UL Listed to ANSI/UL 790 Class C[2]
- Meets certain FORTIFIED Roof™ requirements. Visit gaf.com/Fortified and current FORTIFIED Home™ Standard available at fortifiedhome.org for details. U.S. only.

1. Warm, moist air escapes attic through **Cobra® Rigid Vent 3™ Exhaust Vent for Roof Ridge** (installed under ridge cap shingles)
2. Fresh air enters attic through intake vent at or near the soffit

† Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence [or eligible second owner(s)] owns the property where the qualifying GAF products are installed. For other owners/structures, Lifetime coverage is not applicable. Lifetime coverage on shingles requires the use of GAF Lifetime shingles only. See the *GAF Shingle & Accessory Limited Warranty* for complete coverage and restrictions. Visit gaf.com/LRS for qualifying GAF products. Lifetime coverage on shingles and accessories requires the use of any GAF Lifetime shingle and at least 3 qualifying GAF accessories. See the *GAF Roofing System Limited Warranty* for complete coverage and restrictions. For installations not eligible for the *GAF Roofing System Limited Warranty*, see the *GAF Shingle & Accessory Limited Warranty*. Visit gaf.com/LRS for qualifying GAF products.

[1] Under controlled laboratory testing.

[2] Refer to UL Online Certification Directory for actual assemblies.

[3] See *System Plus, Silver Pledge™*, or *Golden Pledge Limited® Warranty* for complete coverage and restrictions.

GAF LIFETIME LIMITED WARRANTY TERM | GAF AMERICAN OWNED | WINNER 9 OUT OF 10 RECOMMENDED WOMEN'S CHOICE AWARD 2012-2025 | FORTIFIED ROOF

We protect what matters most™

GAF

©2025 GAF • RESCB173-0325 446182-0425