


# Flat TCPP-Free NH Polyiso with CGF Facers for Combustible Decks

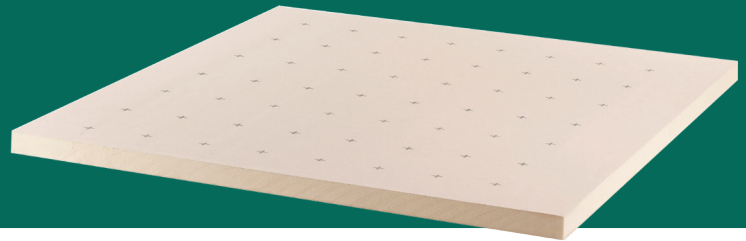

## Description:

EnergyGuard™ NH Barrier Polyiso Insulation is made of durable coated glass fiber facers (CGF) bonded to a core of non-halogenated polyisocyanurate foam.

## Features and Benefits:

- **EnergyGuard™ NH Barrier Polyiso Insulation is TCPP-Free, using a non-halogenated flame retardant and is Red List Free**
- **Maintains the same R-value when tested according to ASTM C1289 using the C518 test method at both a mean temperature of 40° F (4.4° C) and 75° F (24° C)**
- EnergyGuard™ NH Barrier Polyiso Insulation achieves an ANSI/UL 790 Class A roofing fire-resistance rating as a component of UL Classified roofing assemblies over combustible decks with a 0.5" (12.7mm) board thickness. Refer to UL Product iQ for approved assemblies
- High insulation value — polyiso insulation has the highest R-value per inch compared to any other type of non-polyiso insulation of equivalent thickness

- Because of its light weight, this material is easy to handle on the job site and installs quickly. Easy cutting in the field provides the installer with simplified fabricating on the roof deck
- Meets the requirements of ASTM D3273 resistance to mold growth\*
- Excellent dimensional stability, high moisture resistance and low water permeability
- Versatile — approved component in single ply, BUR and modified bitumen systems, with a variety of attachment methods: mechanically attached, fully adhered, loose laid and ballasted

## Panel Characteristics:

- Available in a variety of thicknesses from 0.5" (12.7 mm) to 4.6" (116 mm) to best suit your specifications
- Available in 4' x 4' (1.22 m x 1.22 m) and 4' x 8' (1.22 m x 2.44 m) boards
- Other EnergyGuard™ NH products available - Tapered, HD Cover Boards. See individual data sheets for more information

## Sustainability:

- EnergyGuard™ NH Barrier Polyiso Insulation board holds one of the industry's first product-specific Environmental Product Declarations (EPD) for non-halogenated polyiso products.
- Can contribute towards sustainable certifications under a green building rating system such as LEED v4, or Living Building Challenge
- Manufactured with EPA-compliant blowing agents containing no CFCs or HCFCs; has zero ozone depletion potential (ODP) and negligible global warming potential (GWP)
- Potential LEED Credits for Polyiso Use
- Living Building Challenge Red List Approved
- GREENGUARD Gold
- Environmental Product Declaration (EPD)
- Where sold compliant with State HFC regulations. More information available at [www.polyiso.org](http://www.polyiso.org)

Declare.



\* GAF warranties and guarantees do not provide coverage against mold or other biological growth. Refer to [gaf.com](http://gaf.com) for more information on warranty and guarantee coverage and restrictions.



Visit [gaf.com](http://gaf.com)

We protect what matters most™



## Codes & Compliance:

- Meets the requirements of ASTM C1289 Type II, Class 2, Grade 2 (20 psi), and available in Grade 3 (25 psi)
- Classified by UL in accordance with ANSI/UL 790 — refer to UL Product iQ for approved assemblies.
- UL Evaluation Report ERI1306-03
- For additional information, contact GAF at 877-423-7663 or [designservices@gaf.com](mailto:designservices@gaf.com)



## EnergyGuard™ NH Barrier Polyiso Thermal Values:

Size*	R-Value †	Max Flute Span (in)
0.5" (12.7 mm)	2.9	2 5/8" (66.7 mm)
1.0" (25.4 mm)	5.7	2 5/8" (66.7 mm)
1.5" (38.1 mm)	8.6	4 3/8" (111 mm)
2.0" (51 mm)	11.4	4 3/8" (111 mm)
2.2" (59 mm)	12.6	4 3/8" (111 mm)
2.3" (58 mm)	13.2	4 3/8" (111 mm)
2.5" (64 mm)	14.4	4 3/8" (111 mm)
3.0" (76 mm)	17.4	4 3/8" (111 mm)
3.5" (89 mm)	20.5	4 3/8" (111 mm)
3.7" (94 mm)	21.7	4 3/8" (111 mm)
4.0" (102 mm)	23.6	4 3/8" (111 mm)
4.3" (109 mm)	25.4	4 3/8" (111 mm)
4.5" (114 mm)	26.6	4 3/8" (111 mm)
4.6" (116 mm)	27.1	4 3/8" (111 mm)

\* Other thicknesses available upon request

† Long Term Thermal Resistance Values provide a 15-year time weighted average in accordance with CAN/ULC 770.

For optimal roof performance and to prevent thermal bridging GAF recommends installing two layers of Polyiso with staggered joints

## Typical Physical Property Data:

Property	Test Method	Values
Compressive Strength	ASTM D1621	Grade 2 - 20 psi min (138 kPa) or Grade 3 - 25 psi min (172 kPa)
Dimensional Stability Change (length + width)†	ASTM D2126	< 2% linear change
Flexural Strength	ASTM C203	40 psi min (275 kPa)
Tensile Strength	ASTM C209	500 psf min (24 kPa)
Water Absorption (percent by volume)	ASTM C209	1.5% max
Water Vapor Permeance	ASTM E96, Procedure A	1.5 perm max (85.8ng/Pa·s·m²)
Service Temperature		-100° to 250 °F (-73.3° to 121.1 °C)
Flame Spread Index §	ASTM E84	< 75 **
Smoke Developed Index	ASTM E84	< 200 **
Resistance to Mold††	ASTM D3273	Pass (10)

† Stated dimensional stability tolerance: thickness shall not diminish by more than 4% max.

§ These numerical ratings are not intended to reflect hazards presented by these or any other material under actual fire conditions.

\*\* Foam Core

†† GAF warranties and guarantees do not provide coverage against mold or other biological growth. Refer to [gaf.com](http://gaf.com) for more information on warranty and guarantee coverage and restrictions.

## Warnings and Limitations:

- EnergyGuard™ NH Barrier Polyiso Insulation is a non-structural, non load-bearing material. It is not designed for direct traffic usage unless adequately protected.
- EnergyGuard™ NH Barrier Polyiso Insulation should be stored protected from the elements. Bundle wrap is not for use as waterproofing for boards. No more insulation should be installed than can be completely covered with roofing on the same day.
- As unprotected polyisocyanurate will burn, fire safety precautions should be observed wherever insulation products are used.
- Direct torching of modified bitumen roofing to EnergyGuard™ NH Barrier Polyiso Insulation will present a fire hazard. A properly installed fiberglass base sheet MUST be used over the insulation.
- Refer to PIMA Technical Bulletin No. 109 Storage and Handling Recommendations for Polyiso Roof Insulation at [www.polyiso.org](http://www.polyiso.org).
- Refer to the application specifications in the current membrane manufacturer's application and specifications manual for proper installation procedures.



Visit **gaf.com**

We protect what matters most™

