


# Roof Walkpad

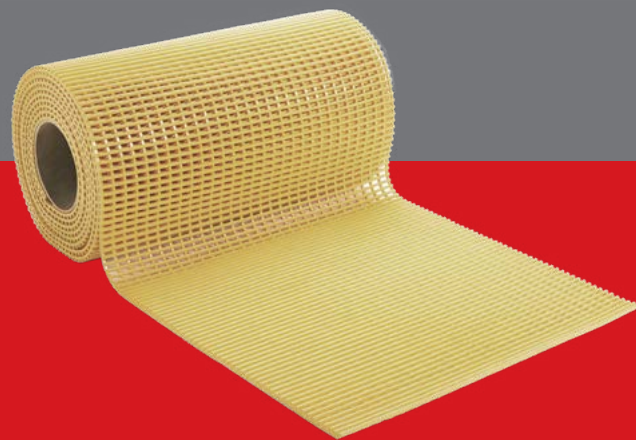

## **GAF** CROSSGRIP™ TPO

Loose laid walkpad

ITEM CODES: WHITE - 852E920 / GRAY - 852E345 / YELLOW - 852E902

### Description:

Crossgrip TPO has been specifically created to protect TPO flat roofs from heavy foot traffic, dropped tools and maintenance equipment. Lightweight and flexible, Crossgrip TPO roof walkway pads come in a rolled format, and are designed to be loose laid with no fixing required, so can be installed quickly and easily, even in adverse weather conditions

### Uses:

Crossgrip™ TPO is designed for use on TPO low-slope roofs.

### Advantages:

- Anti-slip surface helps reduce slips and trips by providing a firm grip underfoot.
- Clear walkway delineation.
- Protects the roof membrane.
- Quick and easy installation - simply unroll and go.

### Product Application:



### Product Specifications:

Height	1/2" (12mm)
Standard roll option	3' x 33' (0.91 x 10m)
Weight	1.1 lb/sq.ft (5.2 kg/m2)
Colour options	White, Gray or Yellow
Rolls per Pallet	6
Full Pallet Weight	Approx. 770 lb. (349 kg)

### Technical information:

Property	Details
Acoustic	Excellent sound absorption properties.
Composition	Thermoplastic polyolefin.
Drainage	DIN 51130: V10
Environment	Crossgrip TPO is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Flammability	UL 94 HB Self Extinguished (material ignited but stopped burning prior to reaching the timing zone) / No Burn Rate. UL 214 did not ignite.
Slip Resistance	ASTM 1677: 1.1/0.9, DIN 51130: R9
Wind Resistance	When loose laid, Crossgrip TPO can withstand winds up to 55mph (89 km/h).



### Storage and Handling:

Rolls are shipped in heavy duty cardboard. Store in a dry and covered elevated position.

### Testings and Approvals:

- Certified slip resistance - ASTM E303.
- Stable in winds up to 55mph
- Independently verified. Contact GAF Design Services for additional information.



Visit [gaf.com](http://gaf.com)

We protect what matters most™

