


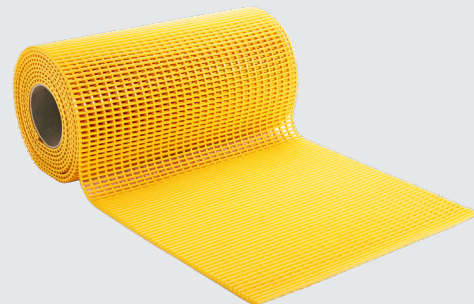

Description:

Crossgrip™ TPO has been specifically created to protect TPO flat roofs from heavy foot traffic, and dropped tools and maintenance equipment. Lightweight and flexible, Crossgrip™ TPO roof walkway pads come in a rolled format, and are designed to be loose laid with no fixing required, so can be installed quickly and easily, even in adverse weather conditions.

Storage and Handling:

Rolls are shipped in heavy-duty cardboard. Store in a dry and covered elevated position.

Technical Information:

Property	Details
Composition	Thermoplastic polyolefin
Drainage	DIN 51130: V10
Flammability	UL 94 HB Self Extinguished (material ignited but stopped burning prior to reaching the timing zone) / No Burn Rate. UL 214 did not ignite.
Slip Resistance	ASTM 1677: 1.1/0.9, DIN 51130: R9
Wind Resistance	When loose laid, Crossgrip™ PVC can withstand wind up to 55 mph in accordance with ASTM D3161-16

Advantages:

- Anti-slip surface helps reduce slips and trips by providing a firm grip underfoot.
- Clear walkway delineation.
- Helps protect the roof membrane.
- Quick and easy installation — simply unroll and go.

Product Application:

- Loose laid

Uses:

Crossgrip™ TPO is designed for use on low-slope roofs.

Testings and Approvals:

- Tested slip resistance — ASTM E303
- Contact GAF Design Services for additional information

Product Specifications

Height	1/2" (12 mm)
Standard roll options	3' x 33' (0.91 m x 10 m)
Weight	1.1 lb./sq. ft. (5.2 kg/m²)
Color options	White, Gray, or Yellow
Rolls per Pallet	6
Full Pallet Weight	Approx. 770 lb. (349 kg)

Item SKUs

White	852E920
Gray	852E345
Yellow	852E902



Visit [gaf.com](https://www.gaf.com)

For additional information, contact GAF Design Services at 1-877-423-7663 or designservices@gaf.com

We protect what matters most™

