


Perimeter Edge Metal

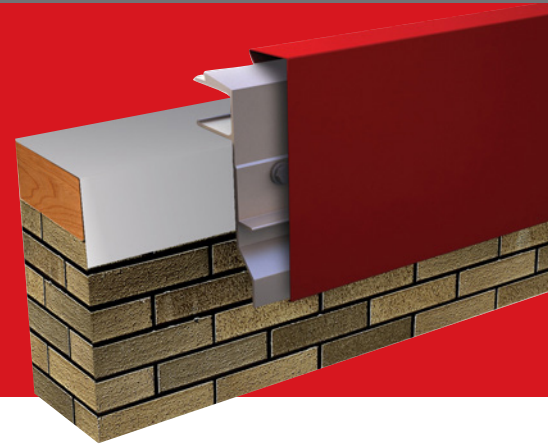

Description:

EverGuard® Pro HG Fascia is a snap-on system that protects against tough weather conditions. It is tested to provide superior protection from wind pressure versus field-fabricated gravel stops. The unique design of the extruded aluminum bar with pre-punched holes securely terminates single-ply membranes. It can also help increase productivity with its ease of installation.

Features and Benefits:

- EverGuard® Pro HG Fascia sizes range from 4" – 10" (102 mm – 254 mm) face heights to accommodate multiple nailers and wall requirements.
- The design eliminates stripping-in which is typical with other roof edge designs so it is faster and easier to install.
- Allows for heavier gauge cover material.
- EverGuard® Pro HG Fascia covers can be manufactured in 22 ga. galvanized steel, or .040", .050", and .063" aluminum.
- Factory-fabricated miters, scuppers, and drainage accessories provide a clean aesthetic and can help save time by eliminating the need for field fabrication.
- Express, standard, and premium colors and finishes are available and include a 30-year limited Kynar 500® finish warranty on coil-coated standard colors. For warranty details, please visit gaf.com.
- Custom colors are also available. A 10-year limited warranty is included for post-painted Kynar®-coated aluminum applications unless otherwise stated. A 20-year limited warranty may be available upon request for certain colors.*

* Restrictions apply; consult your GAF Territory Manager for more information.

Product Specifications

STANDARD SIZES	4 in. (102 mm) 5.5 in. (127 mm) 7 in. (179 mm) 8.5 in. (216 mm) 10 in. (254 mm)
LENGTH	12 ft. (3.65 m)
MATERIALS	22 ga. galvanized steel .040", .050", and .063" aluminum
FINISHES	Mill aluminum Pre-finished Kynar 500® (See standard color chart) Premium pre-finished Kynar 500® (See standard color chart) Post-finished Kynar 500® Pre-finished anodized aluminum — clear, bronze, or black Post-finished anodized aluminum Custom post-coated Kynar 500® finishes are available
PRE-PUNCHED HOLES	12 in. (305 mm) o.c.

Codes and Compliance:

- Evaluated in accordance with ANSI/SPRI ES-1, which is a requirement of IBC Section 1504.5 for roof system metal edge securement.
- FM Approved per Approval Standard 4435. Refer to RoofNav.com product detail report for approved uses, requirements and ratings.
- Miami-Dade County Product Control Approved



10 Express Colors¹


Express Colors are available for quick shipping to meet your job requirements.²



For standard and premium colors, go to the GAF color chart, available at gaf.com/perimeteredgemetal. Custom colors are also available.

¹ Express Colors available in shorter lead times for .040", and .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".

² It is difficult to reproduce the color clarity of these products. Before selecting your color, please contact your local GAF territory manager to request a paint chip for accurate color representation.

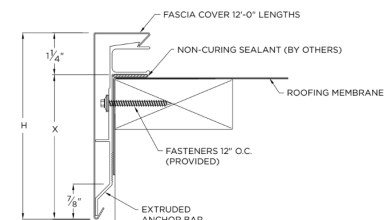

Visit gaf.com/PerimeterEdgeMetal

We protect what matters most™

