

EverGuard™ **XLGutters**

Description:

The EverGuard™ XL Gutter offers excellent water management and wind protection and is the largest gutter that can meet the requirements of the ANSI/SPRI GT-1 test standard. The larger size accommodates the drainage of large roof areas with minimal downspouts.

No external brackets or wind straps means faster lead time because no post-paint is required. And the Rauch Alignment Bar (provided with system order) is a unique tool that helps ensure the proper placement of the lower mounting hanger.

Features and Benefits:

- The lower mounting hanger creates an additional point of securement across the entire length of the gutter to help with wind uplift, and the heavy-gauge Z-Bracket offers strong, reliable performance.
- Pre-punched holes and provided splice plates and fasteners help ensure proper attachment and fast installation.
- Manufactured in 22 ga. galvanized steel, or .050" or .063" aluminum.
- Matching corners, trims, expansion joints, and accessories are available.

Standard Sizes:		
Face	Bottom	Back
8"	8"	9"
9"	9"	10"
10"	10"	11"
11"	11"	12"
12"	12"	13"
13"	13"	14"
14"	14"	15"

Codes and Compliance:

- FM-approved for wind uplift protection. Refer to RoofNav.com for actual assemblies.



- Tested in accordance with ANSI/SPRI GT-1 Standard for Gutter Systems Used with Low-Slope Roofs.



10 Express Colors*

Express Colors are available for quick shipping to meet your job requirements.†



For standard and premium colors, please refer to the GAF color chart, available at gaf.com/perimeteredgemetal. Custom colors are also available.

EverGuard™ XL Gutter:

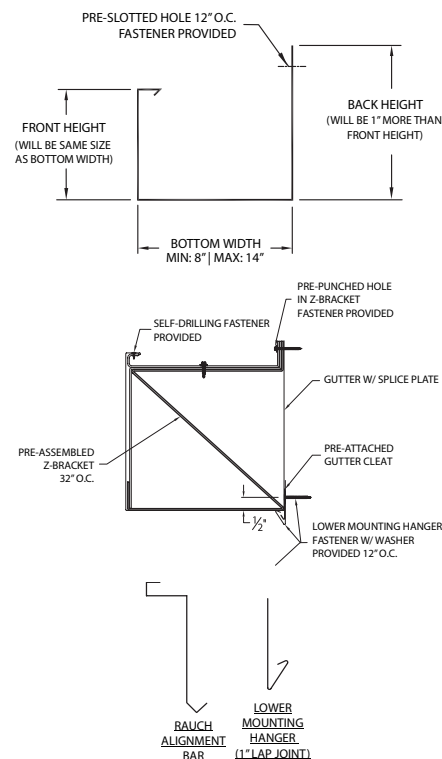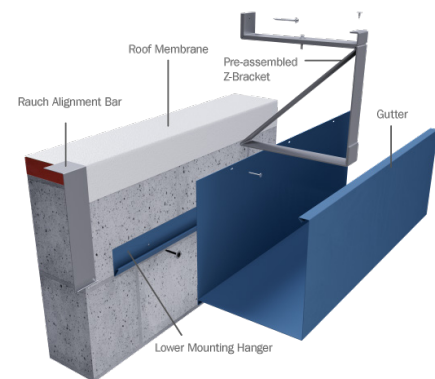

Note: if building exterior contains insulated panels, EIFS, or other non-structural materials, a mounting angle is required with the lower mounting hanger.

* It is difficult to reproduce the color clarity of these products. Before selecting your color, please contact your local GAF territory manager to request a paint chip for accurate color representation.

† Express Colors available in shorter lead times for .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".

For additional information, contact GAF Design Services at **1-877-423-7663** or designservices@gaf.com

We protect what matters most™

