


# GAF Premium Fabric

Coating Accessory

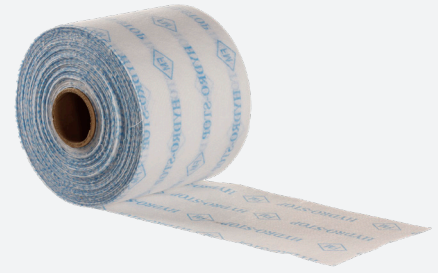

## Description:

GAF Premium Fabric is a tough, non-woven, stitch bonded polyester fabric that is designed for use as a reinforcing material in GAF coatings or BarrierGuard® systems.

## Packaging Sizes:

- 300 ft. long rolls, with the following widths: 4", 6", 8", 12", 16", 20", 24".
- 336 ft long rolls, with the following widths: 40".

## Application Instructions:

See instructions for the specific fabric-reinforced system being installed in the Liquid-Applied Roofing Manual at [gaf.com](http://gaf.com).

## Storage:

**Product Storage Temperature:**  
50°F – 90°F (10°C – 32°C).

Keep GAF Premium Fabric in a clean, dry location.

## Approvals:

- **Miami-Dade Approved**  
NOA 20-0105.10



- **State of Florida Approved**  
FL620 and FL20663

## Safety and Handling:

For specific information regarding safe handling of this material, please refer to the Safety Data Sheet (SDS).

## Warranty:

Refer to applicable warranties and guarantees, available at [gaf.com](http://gaf.com), for complete coverage and restrictions.

## Physical Properties

Type	ASTM Test Method	Test Values*
Weight	—	3.0 oz/yd <sup>2</sup> (72 g/m <sup>2</sup> )
Tensile Strength	ASTM D5034	MD: 70 lb. (56 kg) CD: 70 lb. (35 kg)
Elongation	ASTM D5034	MD: 25% CD: 104%
Ball Burst	ASTM D3787	114 lb. (49 kg)
Trapezoidal Tear	ASTM D3787	MD: 27 lbs (7.7 kg) CD: 19 lbs (9.1 kg)
Thickness	ASTM D1777	18 mils

\* Values are approximate and subject to normal manufacturing variations. These values are not guaranteed and are provided solely as a guide.



Visit [gaf.com](http://gaf.com)

For additional information, contact GAF Design Services at 1-877-423-7663 or [designservices@gaf.com](mailto:designservices@gaf.com)

We protect what matters most™

