




Master Flow™ Roof Louver RT65 Plastic Square-Top

Remove excess heat and moisture from the attic
and protect the roof system from premature deterioration

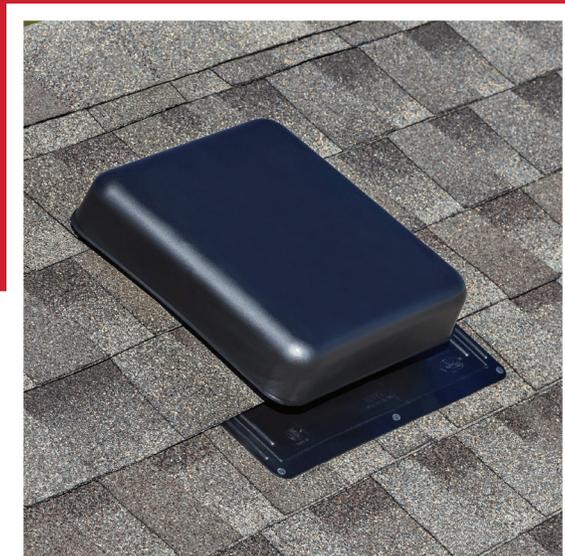

- Help reduce damaging heat and moisture in the attic
- Limit the growth of harmful mold and mildew
- Avoid premature roof system deterioration

Master Flow™ Roof Louver RT65 Plastic Square-Top

Benefits:

- **Allows heat and moisture to escape** the attic on roofs with limited ridge line or when replacing existing roof louvers
- **20% more venting capacity** with 60 sq. in. (38,710 mm²) of NFA per vent instead of the typical 50 sq. in. (32,258 mm²) NFA roof vents
- **Durable high-impact resin construction** with UV inhibitors to help resist fading
- **Popular colors** to complement your finished roof (see specifications)
- **Pre-drilled nail holes** to help make installation easy
- **Eligible accessory product** in the Attic Ventilation category for GAF residential enhanced warranties¹

Balanced ventilation:

Balanced attic ventilation means an equal amount of air entering and exiting. The amount of exhaust ventilation at or near the ridge must **never** exceed the amount of intake ventilation at or near the soffits or eaves. A minimum of 1 sq. ft. of net free ventilation for every 300 sq. ft. of attic floor space is recommended, but always consult local building codes to ensure compliance with local ventilation requirements.

How much do I need?

Calculate the total square footage of your attic floor space and then review the chart below for how many Master Flow™ Roof Louver RT65s are needed:

| Total attic sq. footage | Recommended number of RT65 Roof Louvers | Minimum intake ventilation (net free area in sq. in.) |
|-------------------------|---|---|
| 0 – 1,000 | 4 | 240 |
| 1,001 – 1,500 | 6 | 360 |
| 1,501 – 2,000 | 8 | 480 |
| 2,001 – 2,500 | 10 | 600 |
| 2,501 – 3,000 | 12 | 720 |

Note: Chart above based on 1/300 rule. Always have a balanced attic ventilation system. In no case should the amount of exhaust ventilation at or near the ridge exceed the amount of intake ventilation at or near the soffit. Visit gaf.com/ventcalculator for more details.

Product details:

Nominal Specifications

- 60 sq. in. of NFA per vent (38,710 mm²)
- Opening Size: 11¾" x 10¾" (298 mm x 273 mm)
- Height: 4" (102 mm)
- For roof pitches 3:12 and greater
- Colors available: Brown, Black, Weathered Wood, and Gray

Code Approvals & Standards

- Texas Department of Insurance Product Evaluation RV-61
- CSA



1. Warm, moist air escapes attic through the **Master Flow™ Roof Louver RT65**
2. Fresh air enters attic through the intake vents at or near the soffit

¹ See the GAF Master Flow™ Ventilation Products, System Plus, Silver Pledge™ or Golden Pledge® Limited Warranties for complete coverage and restrictions.



We protect what matters most™

