


FLASHING KEY

- 30" - 66" (762 mm - 1.68 m) REQUIRES BONDING ADHESIVE
- UP TO 30" (762 mm) DRY HUNG

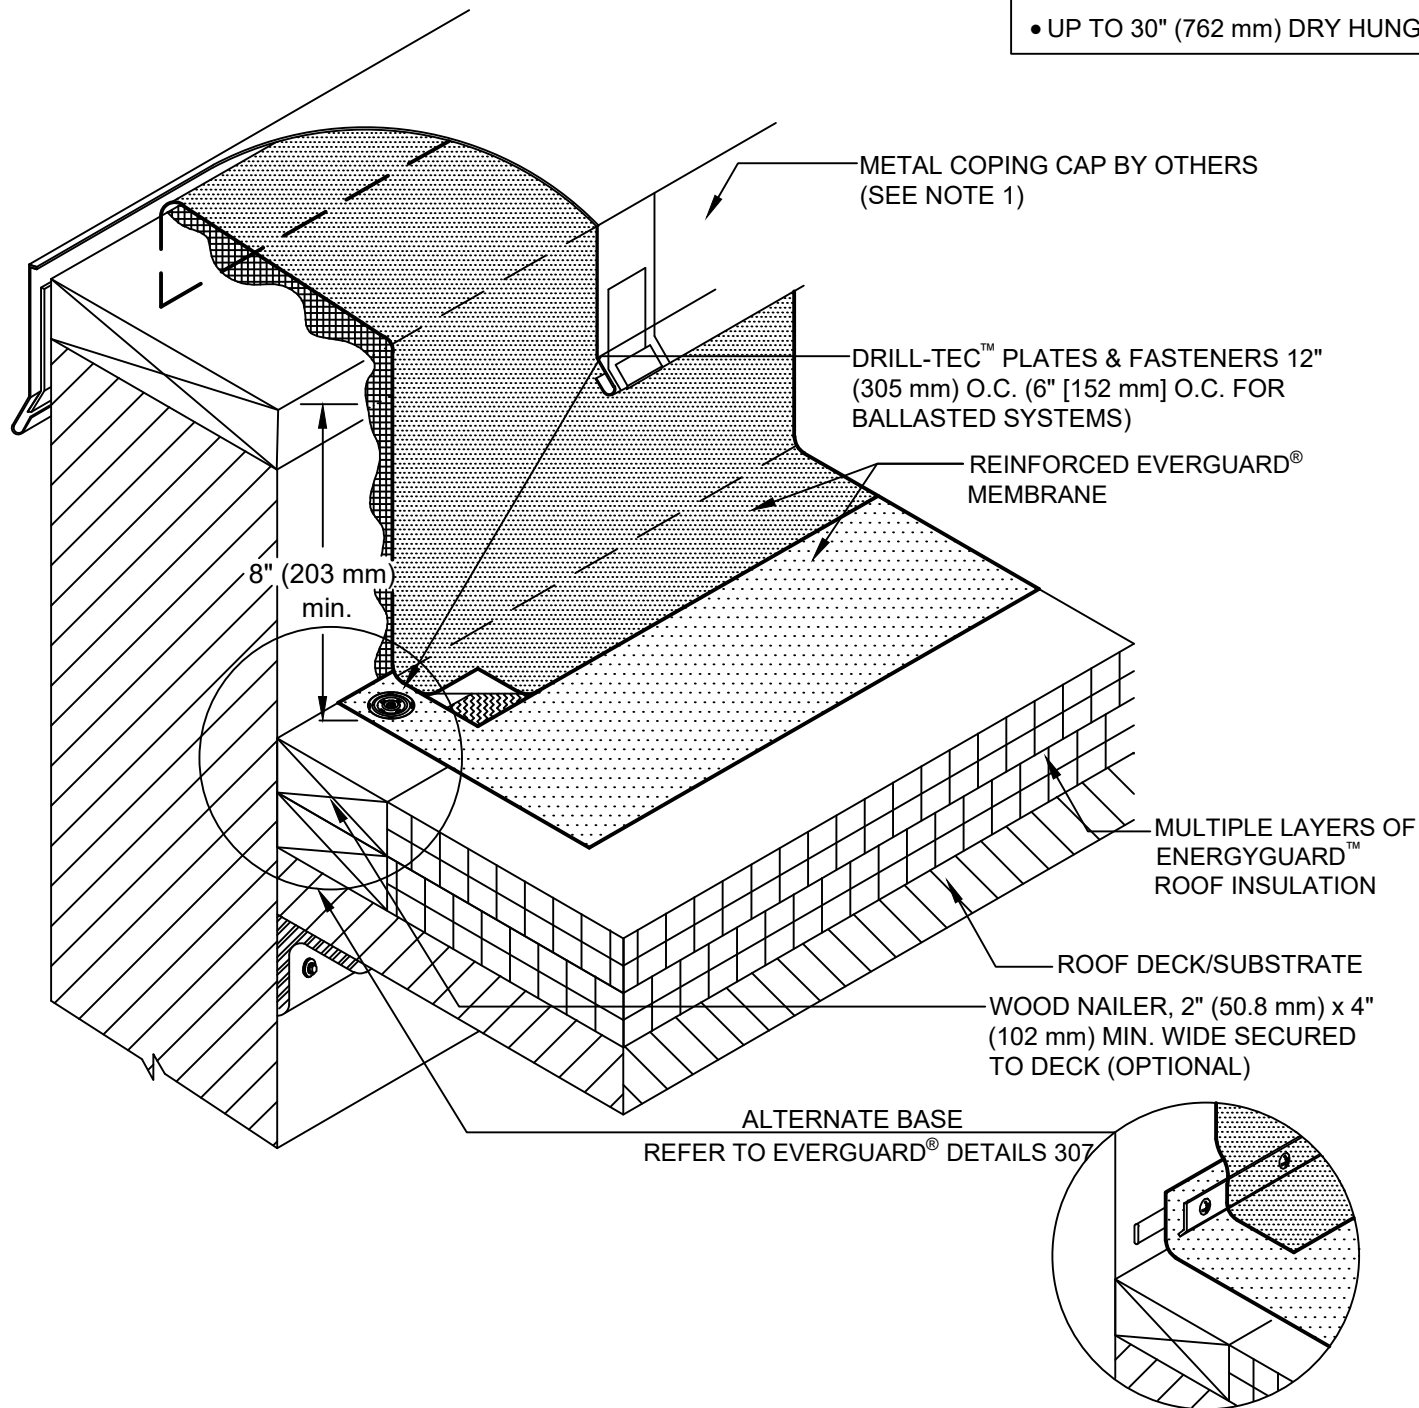

NOTE:

1. PERIMETER EDGE METAL SHOULD BE DESIGNED FOR WIND RESISTANCE IN ACCORDANCE WITH THE APPLICABLE EDITION OF ASCE 7 AND TESTED FOR RESISTANCE IN ACCORDANCE WITH THE TEST METHODS IN THE APPLICABLE EDITION OF ANSI/SPRI ES-1.
2. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A COVER BOARD IS REQUIRED ON MECHANICALLY FASTENED SYSTEMS ONLY.
3. IF EVERGUARD® FREEDOM MEMBRANE IS USED, BONDING ADHESIVE IS NOT NEEDED AND WALL MUST BE PRIMED.

GAF

WALL FLASHING WITH COPING CAP

DRAWING #

303

THIS DETAIL APPLIES TO:

ALL SYSTEMS

ISSUE / REVISION DATE

2/2/21

SCALE

N.T.S.

LEGEND

HEAT-WELDED

EVERGUARD® BONDING ADHESIVE