
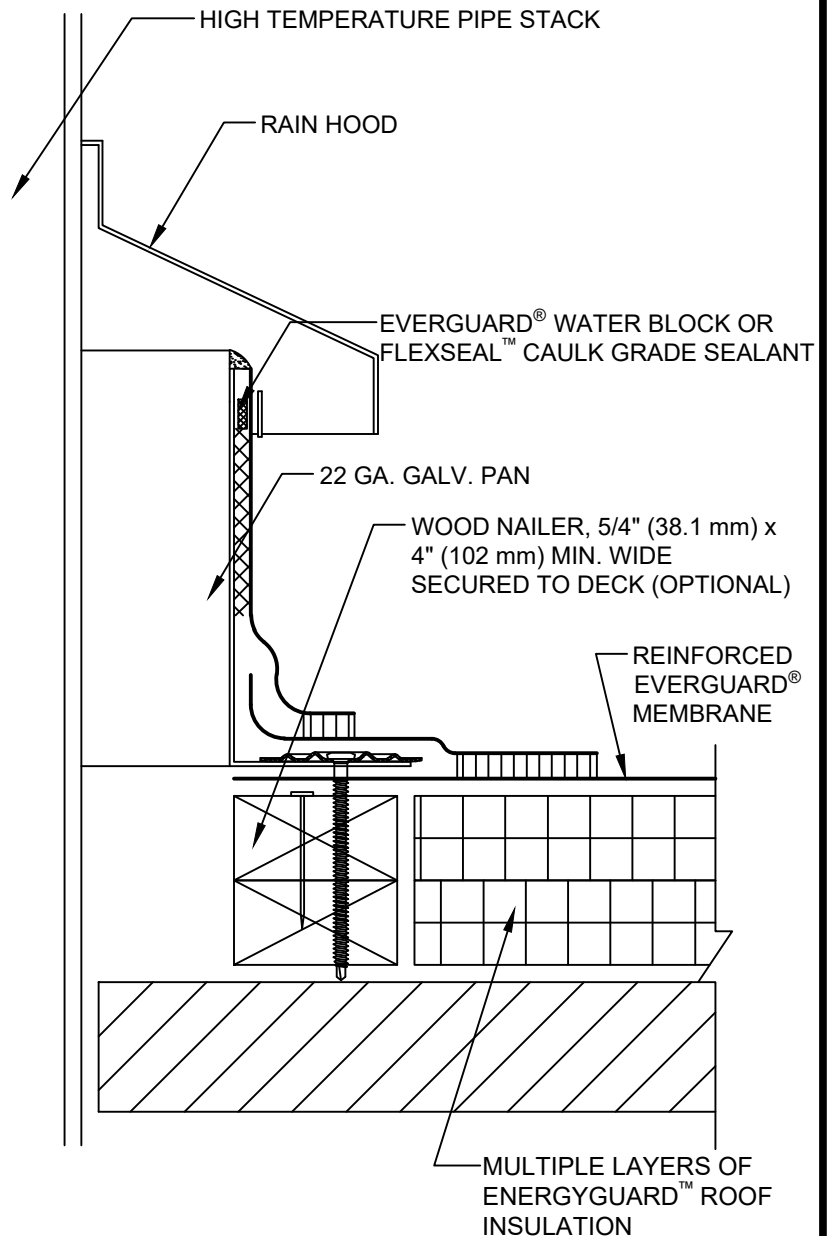


PLAN VIEW

TARGET MADE FROM REINFORCED EVERGUARD® MEMBRANE

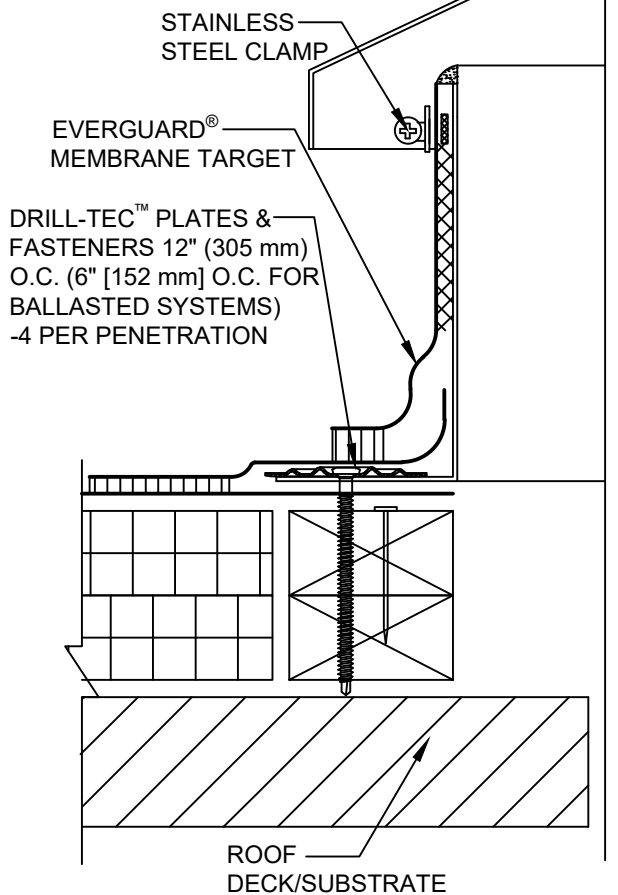

NOTE:

1. TO BE USED WHEN TEMPERATURE OF STACK EXCEEDS 160° F.
2. FOR INSULATION THICKNESS GREATER THAN 8" (203 mm), A COVER BOARD IS REQUIRED ON MECHANICALLY ATTACHED SYSTEMS ONLY.
3. APPLY HEAT TO UNREINFORCED DETAIL MEMBRANE AND FORM BY HAND PRIOR TO INSTALLING.

GAF

HIGH TEMPERATURE STACK FLASHING DETAIL

DRAWING #

508

THIS DETAIL APPLIES TO:

ALL SYSTEMS

ISSUE / REVISION DATE

5/4/23

SCALE

N.T.S.

LEGEND

- HEAT-WELDED
- FLEXSEAL™ CAULK GRADE SEALANT
- EVERGUARD® BONDING ADHESIVE (OPTIONAL)