


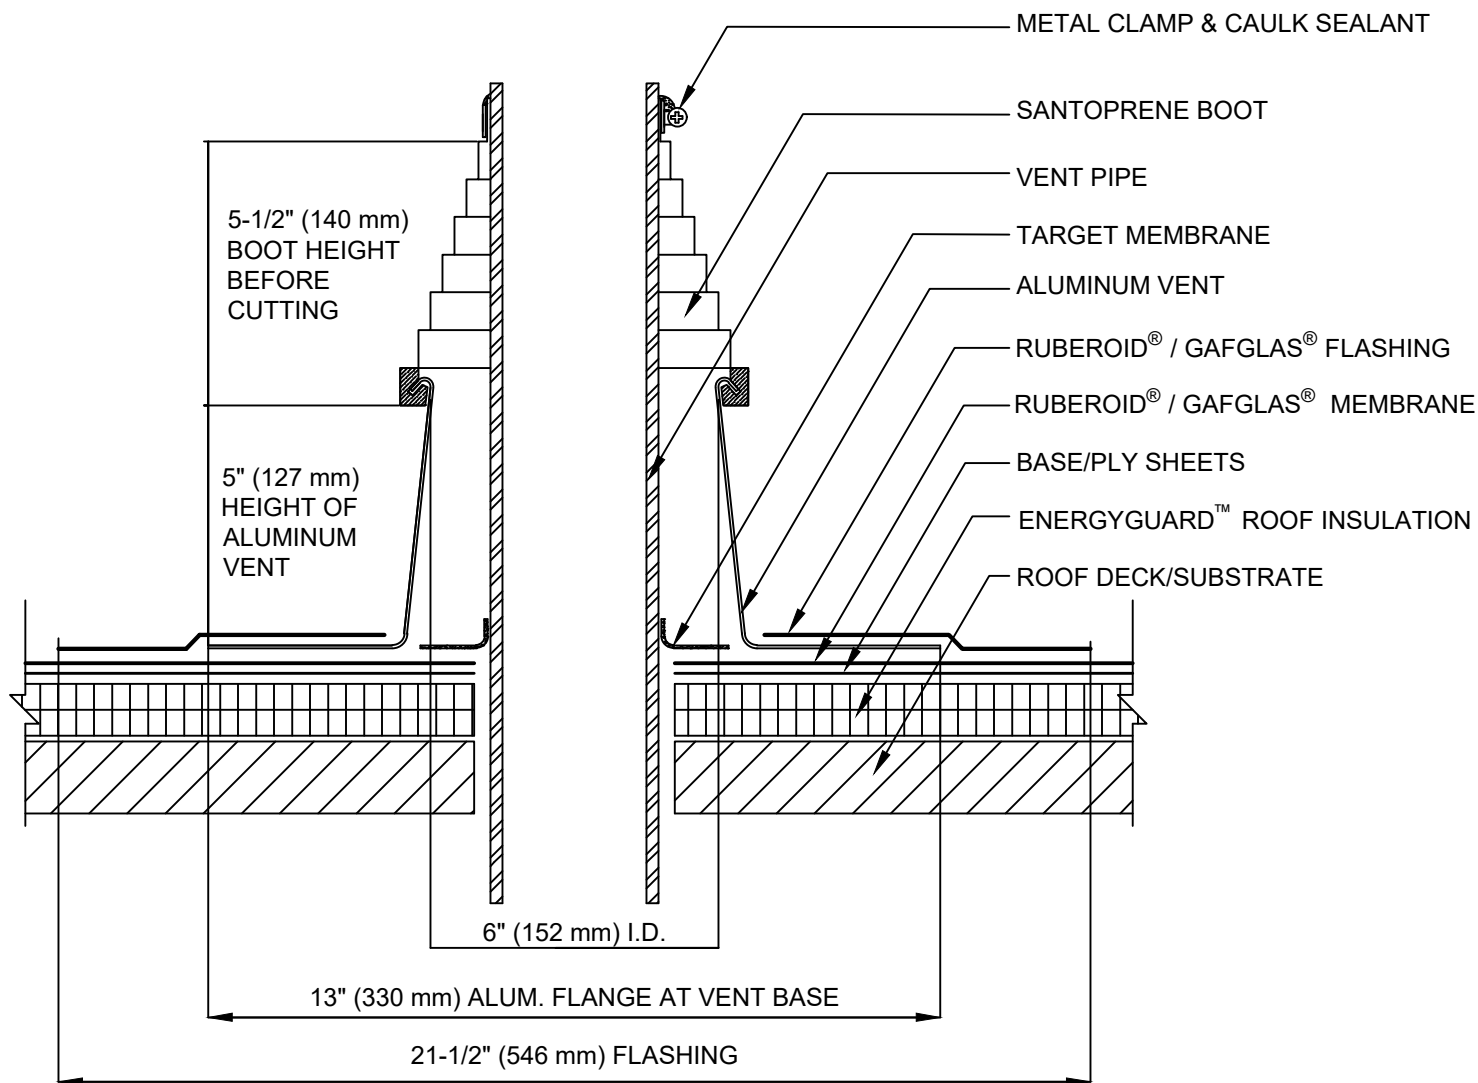

NOTE:

1. VENT IS INSTALLED ON THE BASE/PLY SHEET(S) PRIOR TO INSTALLATION OF TOP MEMBRANE.
2. INSTALL METAL CLAMP AND CAULK SEALANT AT TOP OF BOOT.

GAF

ADJUSTABLE M-VENT™ FLASHING DETAIL

DRAWING #
508

ISSUE / REVISION DATE

2/20/20

SCALE

N.T.S.

LEGEND