
SINGLE-PLY: PVC

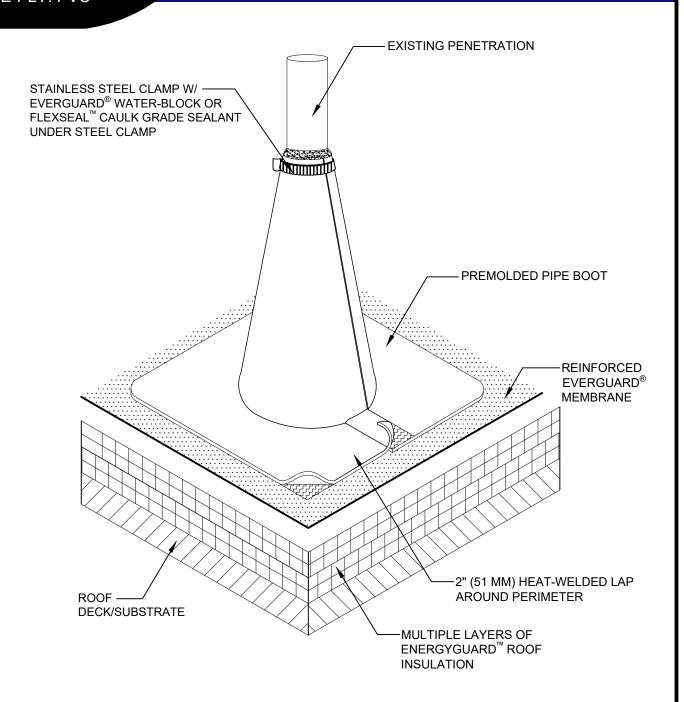

NOTE:

- 1. FOUR DRILL-TEC[™] PLATES & SCREWS AROUND PENETRATION.
- 2. IF PLATES AND FASTENERS ENCROACH INTO THE SEAM AREA OF THE POCKET, THEN A TARGET MUST BE ADDED FIRST TO COVER FASTENERS.
- 3. THIS PRODUCT IS AVAILABLE IN CUSTOM SIZES, VISIT GAF.COM FOR MORE INFORMATION.
 4. THE EXISTING PROJECTION MUST BE CLEAN OF ALL DEBRIS BEFORE INSTALLATION.

_	NON-SF	LIT CONICAL PIPE BOOT			LEGEND			
GΔ	DRAWING#		THIS DETAIL APPLIES TO:	ISSUE / REVISION DATE	SCALE	HEAT-WELDED LAP		
	526B		ALL SYSTEMS	8/17/20	N.T.S.	FLEXSEAL™ CAULK GRADE SEALANT		