



We  
protect  
what  
matters  
most™

**Legend:**  
Sealant  


**Product:**  
GAF PMMA  
Flashing


**Installation  
Method:**  
Over PVC

**Maximum  
Warranty:**  
See Note #4

**Date:**  
12/19/2024

**Scale:**  
Not To Scale

**Detail No.**  
075600  
**304**

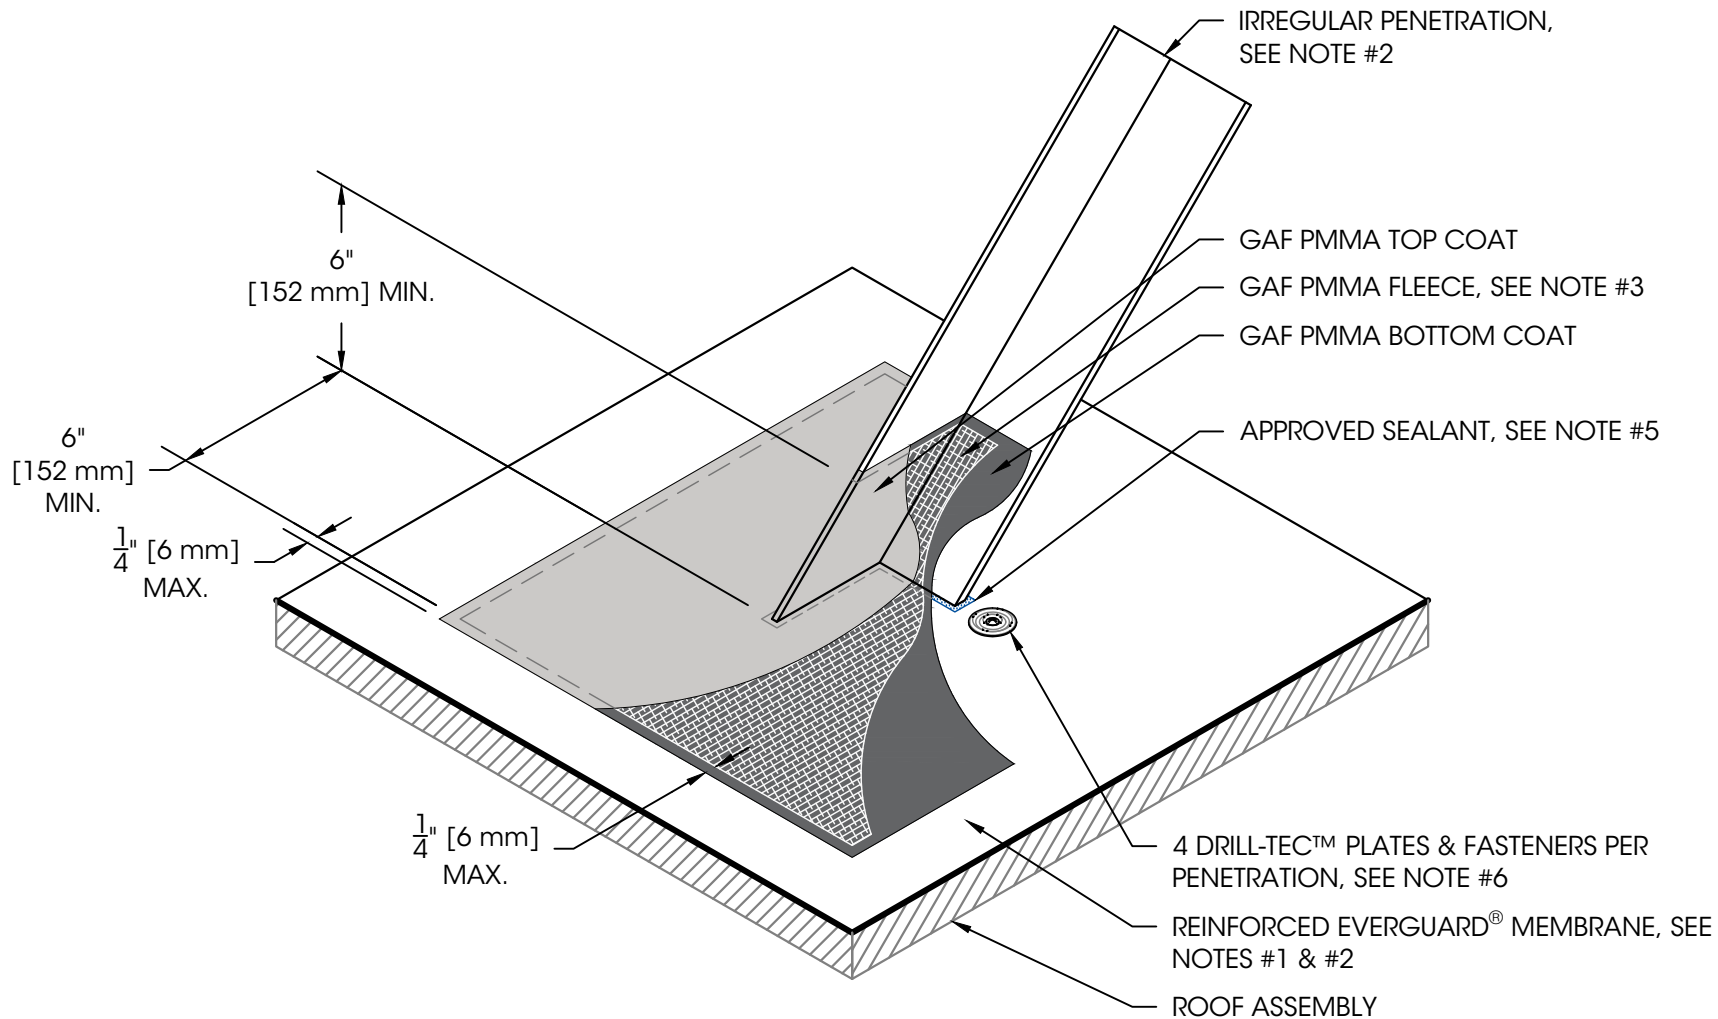

**NOTES:**

1. APPROVED FOR USE OVER EVERGUARD® PVC OR EVERGUARD® PVC KEE MEMBRANE.
2. REFER TO THE GAF PMMA FLASHING INSTALLATION INSTRUCTIONS FOR PROPER SURFACE TREATMENT OF ALL MATERIALS.
3. REFER TO GAF DETAILS 075600-901 & 075600-902 FOR GAF PMMA FLEECE CONFIGURATIONS, CUTTING, FOLDING, & LAPPING TECHNIQUES.
4. PMMA FLASHING IS COVERED UNDER THE APPLICABLE SYSTEM WARRANTY.
5. BEFORE APPLICATION OF GAF PMMA FLASHING, GAF PMMA PASTE OR FLEXSEAL CAULK GRADE SEALANT SHOULD BE USED TO FILL VOIDS WHERE ROOFING MEMBRANES TERMINATE AT PENETRATIONS.
6. GAF PMMA FLASHING MUST EXTEND A MINIMUM OF 3" PAST ALL DRILL-TEC™ PLATES AND FASTENERS.

## Irregular Penetration Flashing