



We  
protect  
what  
matters  
most™

**Legend:**


Heat Weld



Sealant



Adhesive

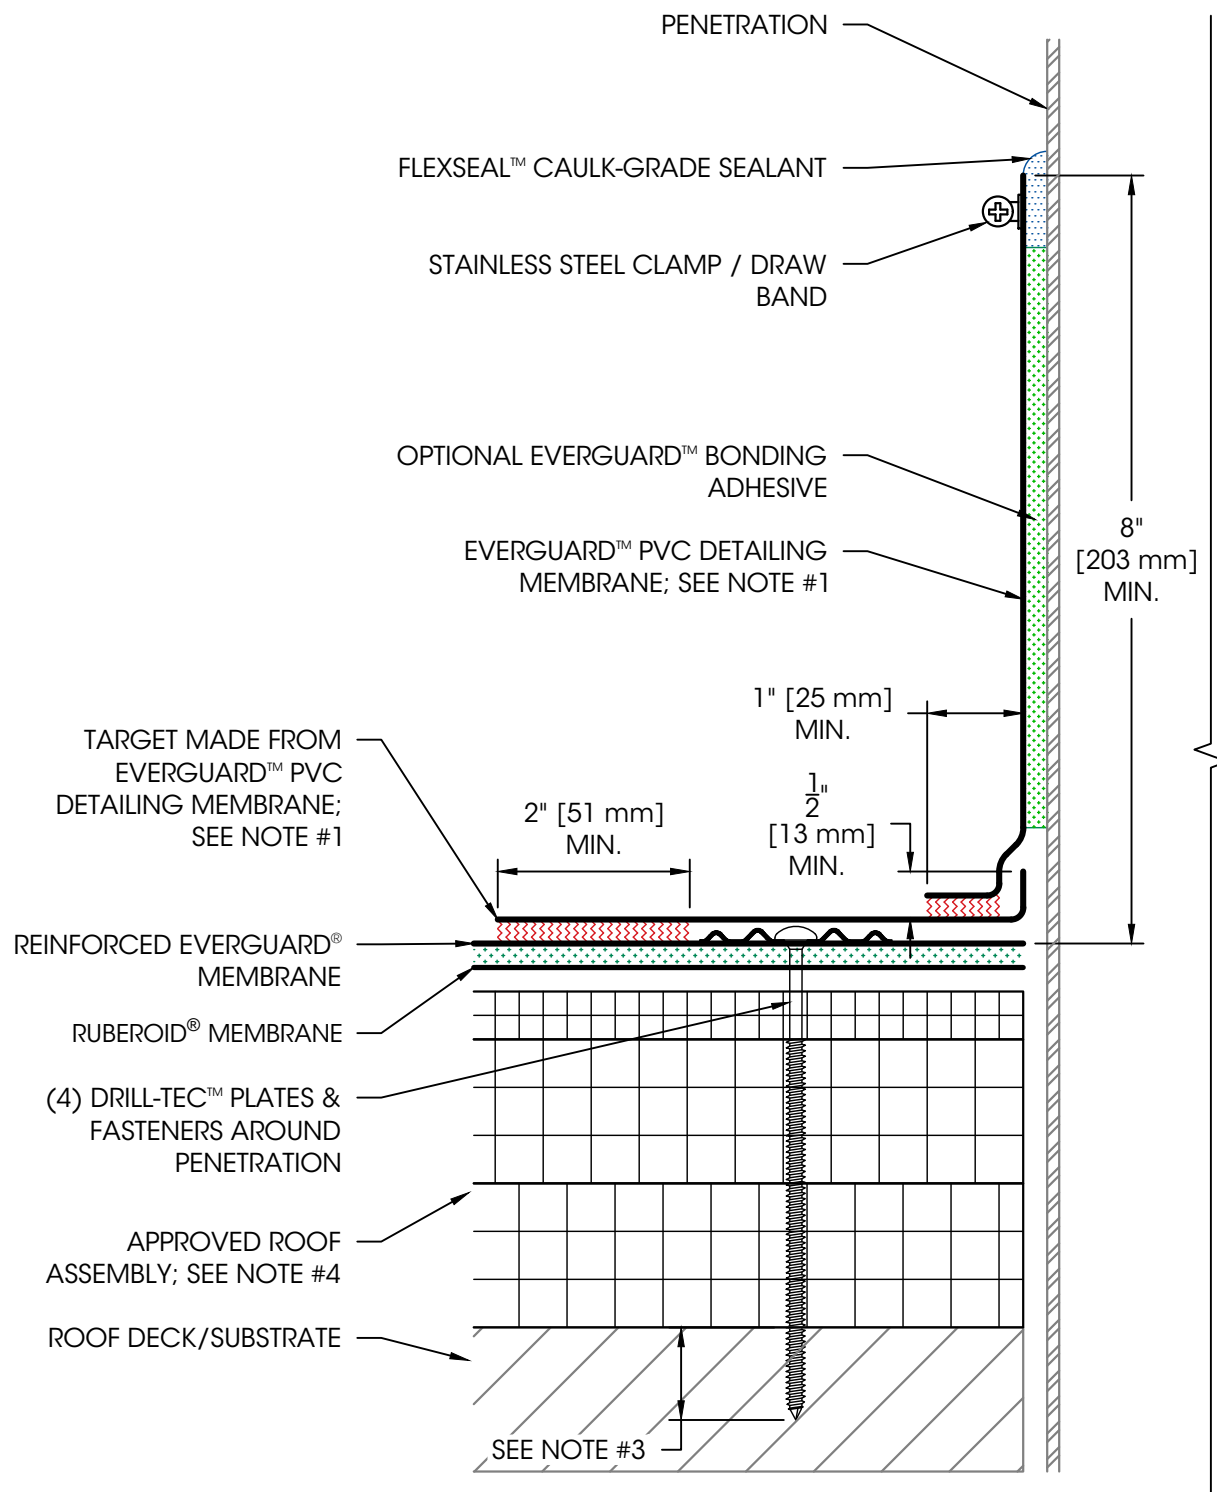

**NOTES:**

1. APPLY HEAT TO EVERGUARD™ DETAILING MEMBRANE AND FORM BY HAND PRIOR TO HOT AIR WELDING.
2. DO NOT USE THIS DETAIL WHEN PENETRATION TEMPERATURE EXCEEDS 160° F [71° C].
3. REFER TO THE APPLICATION TABLES IN THE CURRENT GAF MANUAL FOR MINIMUM FASTENER PENETRATION PER DECK TYPE.
4. REQUIREMENTS AND RECOMMENDATIONS OUTLINED IN THE APPLICABLE GAF MANUAL OR GUIDE SHALL APPLY IN ADDITION TO THE DRAWING ABOVE.

**Product:**

EverGuard PVC  
Fleece-back

**Installation**

**Method:**

Hybrid

**Maximum**

**Warranty:**

30 Years

**Date:**

7/15/2025

**Scale:**

6" = 1'

**Detail No.**

07 54 19

**952**

## Field-Wrapped Penetration Flashing