



We
protect
what
matters
most™

Legend:


Heat Weld



Sealant



Adhesive

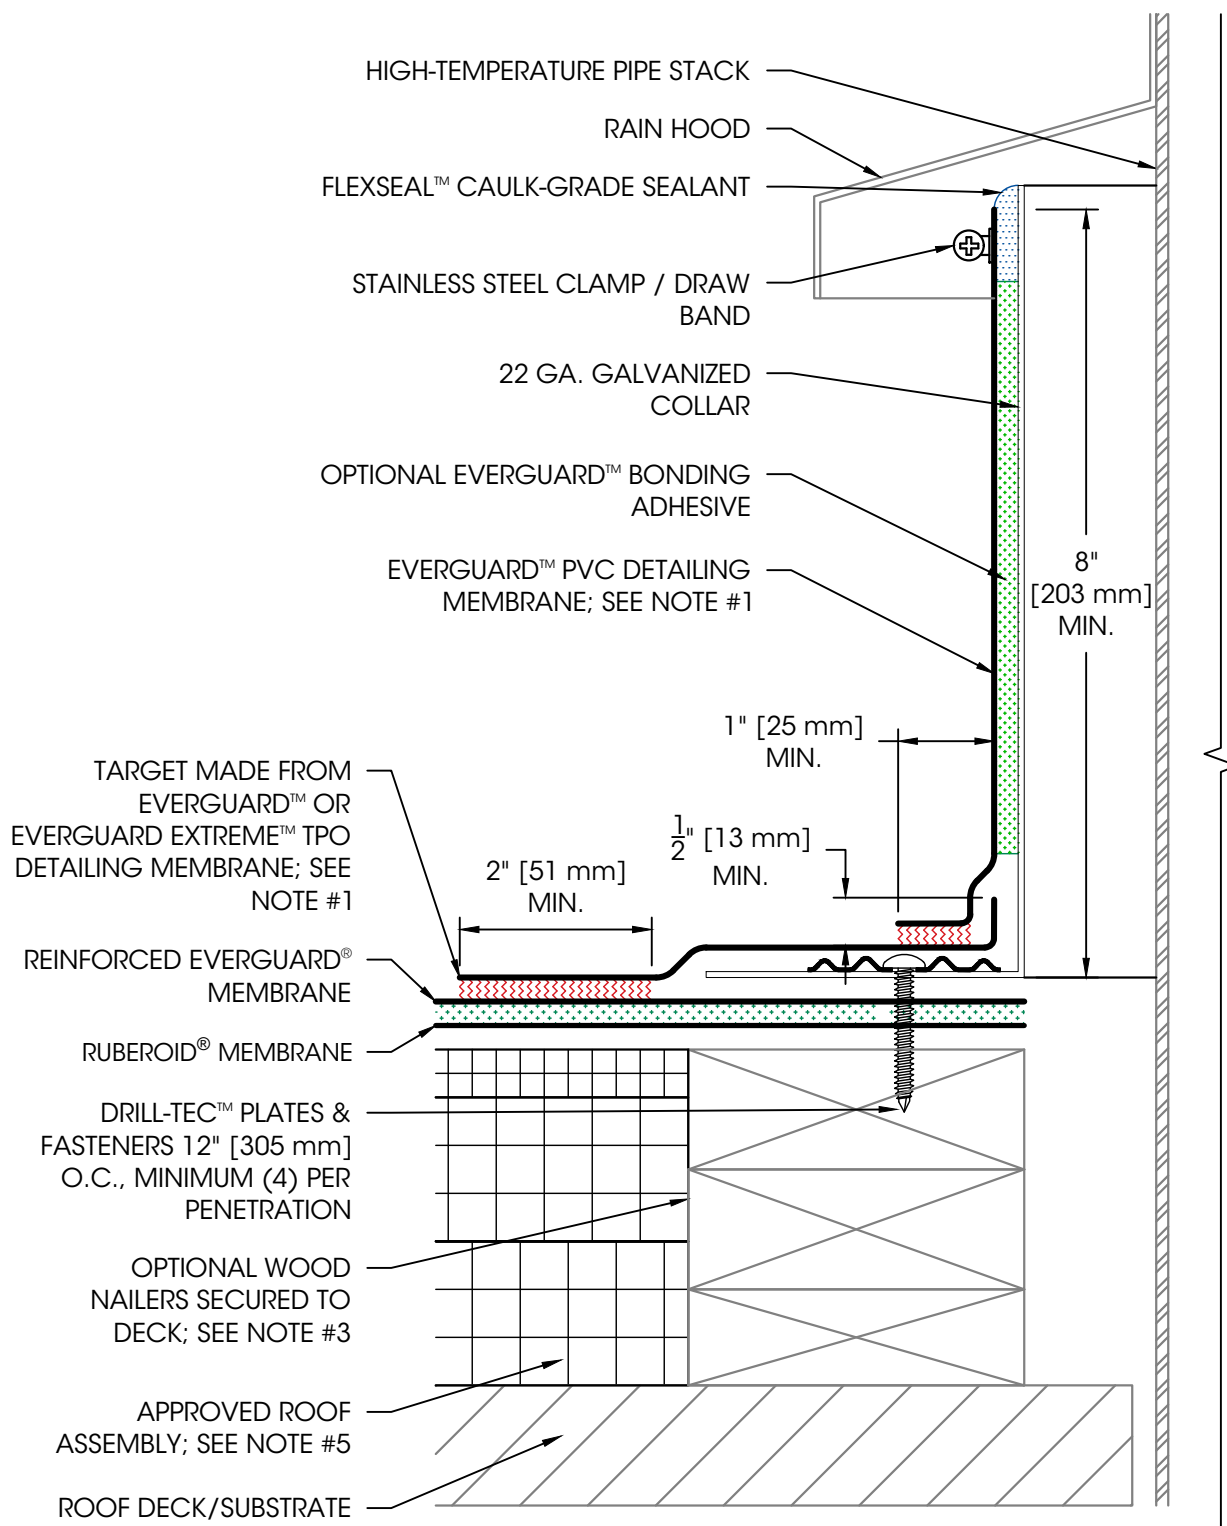

NOTES:

1. APPLY HEAT TO EVERGUARD™ DETAILING MEMBRANE AND FORM BY HAND PRIOR TO HOT AIR WELDING.
2. THIS DETAIL MUST BE USED WHEN THE SERVICE LINE TEMPERATURE EXCEEDS 160° F [71° C].
3. REFER TO THE APPLICATION TABLES IN THE CURRENT GAF MANUAL FOR MINIMUM FASTENER PENETRATION PER DECK TYPE.
4. REQUIREMENTS AND RECOMMENDATIONS OUTLINED IN THE APPLICABLE GAF MANUAL OR GUIDE SHALL APPLY IN ADDITION TO THE DRAWING ABOVE.

Product:

EverGuard PVC
Fleece-back

Installation

Method:

Hybrid

Maximum

Warranty:

30 Years

Date:

7/15/2025

Scale:

6" = 1'

Detail No.

07 54 19

953

High Temperature Stack Flashing