


ISOMETRIC VIEW (NOT TO SCALE)

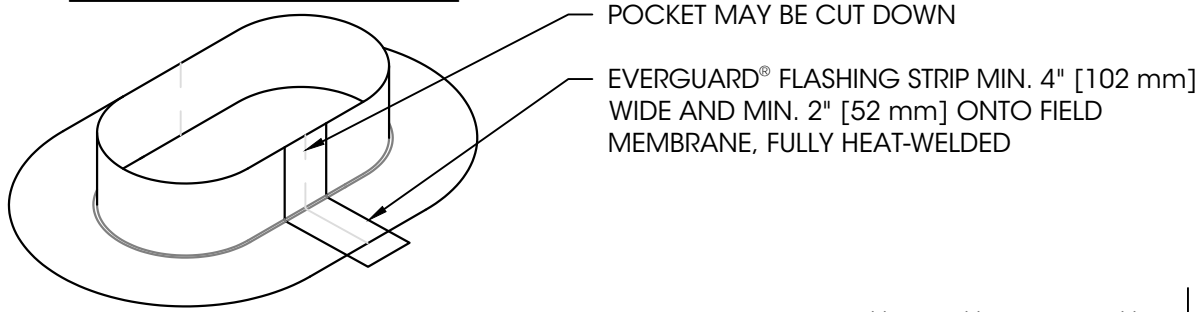

PENETRATION(S); SEE NOTE #2

EVERGUARD™ ONE-PART POURABLE SEALANT; ALLOW OVERFLOW IN ORDER TO PREVENT PONDING OF WATER CAUSED BY UNDERFILLING; SEE NOTES #3 & #4

QUICK SET NON-SHRINK GROUT

EVERGUARD™ PVC POURABLE SEALER POCKET

REINFORCED EVERGUARD® FLEECE-BACK MEMBRANE

RUBEROID® MEMBRANE

DRILL-TEC™ PLATES & FASTENERS AROUND PENETRATION (OPTIONAL); SEE NOTE #1

APPROVED ROOF ASSEMBLY; SEE NOTE #6

ROOF DECK/SUBSTRATE

1" [25 mm] MIN.

1" [25 mm] MIN.

SEE NOTE #5

Legend:
Heat Weld



Sealant



Adhesive



Product:
EverGuard PVC Fleece-back

Installation:
Hybrid Systems

Maximum Guarantee:
30 Years

Date:
8/6/2025

Scale:
3" = 1'

Detail No.
075419
955

NOTES:

1. IF THE PLATES AND FASTENERS INTRUDE INTO THE SEAM AREA, THEN A TARGET MUST BE FIRST INSTALLED OVER THE PLATES AND FASTENERS PRIOR TO POCKET INSTALLATION.
2. THE EXISTING PENETRATION(S) MUST BE CLEAN OF ALL DEBRIS PRIOR TO INSTALLATION.
3. POURABLE SEALANT IS CONSIDERED A MAINTENANCE ITEM AND IS EXCLUDED FROM GUARANTEE COVERAGE.
4. GAPS AROUND THE PENETRATION MUST BE SUFFICIENTLY SEALED TO CONTAIN THE SEALANT.
5. REFER TO THE APPLICATION TABLES IN THE CURRENT GAF MANUAL FOR MINIMUM FASTENER PENETRATION PER DECK TYPE.
6. REQUIREMENTS AND RECOMMENDATIONS OUTLINED IN THE APPLICABLE GAF MANUAL OR GUIDE SHALL APPLY IN ADDITION TO THE DRAWING ABOVE.

Pourable Sealant Pocket Installation