




We
protect
what
matters
most™

Legend:

Sealant



Adhesive

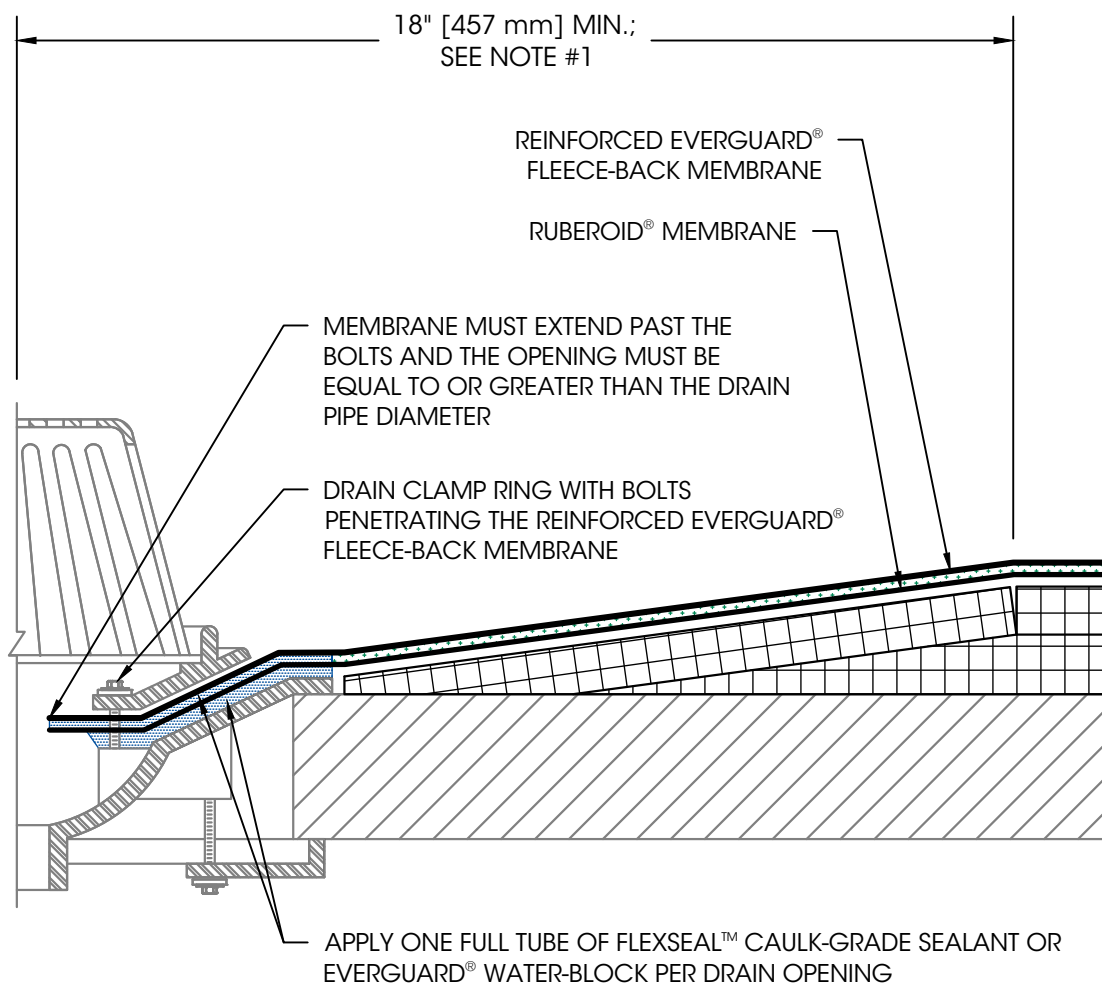

NOTES:

1. INSULATION MUST BE TAPERED TO CREATE A SUMP AROUND THE DRAIN WHEN THE ROOF DECK DOES NOT SATISFY THE MIN. SLOPE REQUIREMENTS FOR DRAINAGE.
2. FOR HEAT WELDED LAPS, USE A MIN. 1-1/2" WELD WITH MACHINE AUTOMATIC WELDERS OR A MIN. 2" WELD WITH A HAND WELDER.

Standard Drain Flashing

Product:
EverGuard PVC
Fleece-back

**Installation
Method:**
Hybrid

**Maximum
Warranty:**
30 Years

Date:
7/11/2025

Scale:
6" = 1'

Detail No.
07 54 19
954