

These shingles MUST be nailed a nominal 5-5/8" (143mm) from bottom of of shingle, above the cut outs, as shown. Nails must not be exposed.

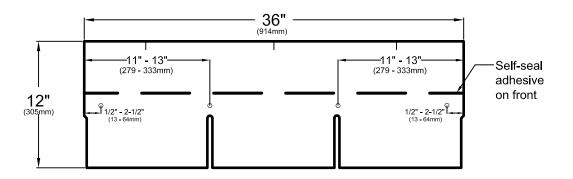

## STANDARD NAILING PATTERN - four nails per shingle

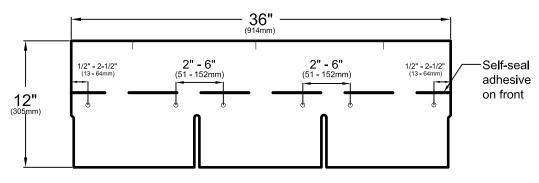

## **ENHANCED NAILING PATTERN** - six nails per shingle\*

1 Campus Drive Parsippany, NJ 07054 www.gaf.com	ROYA SOVERE Shingles	L	NAIL PLACEMENT DETAIL English Size Shingles	03a
	REVISION DATE 9-01-14	SCALE N.T.S		DETAIL REFERENCE SS-RS

<sup>\*</sup> required by some local codes and required for enhanced wind coverage on certain products.

See limited warranty for details.