



We
protect
what
matters
most™

Legend:


Heat Weld



Sealant



Adhesive

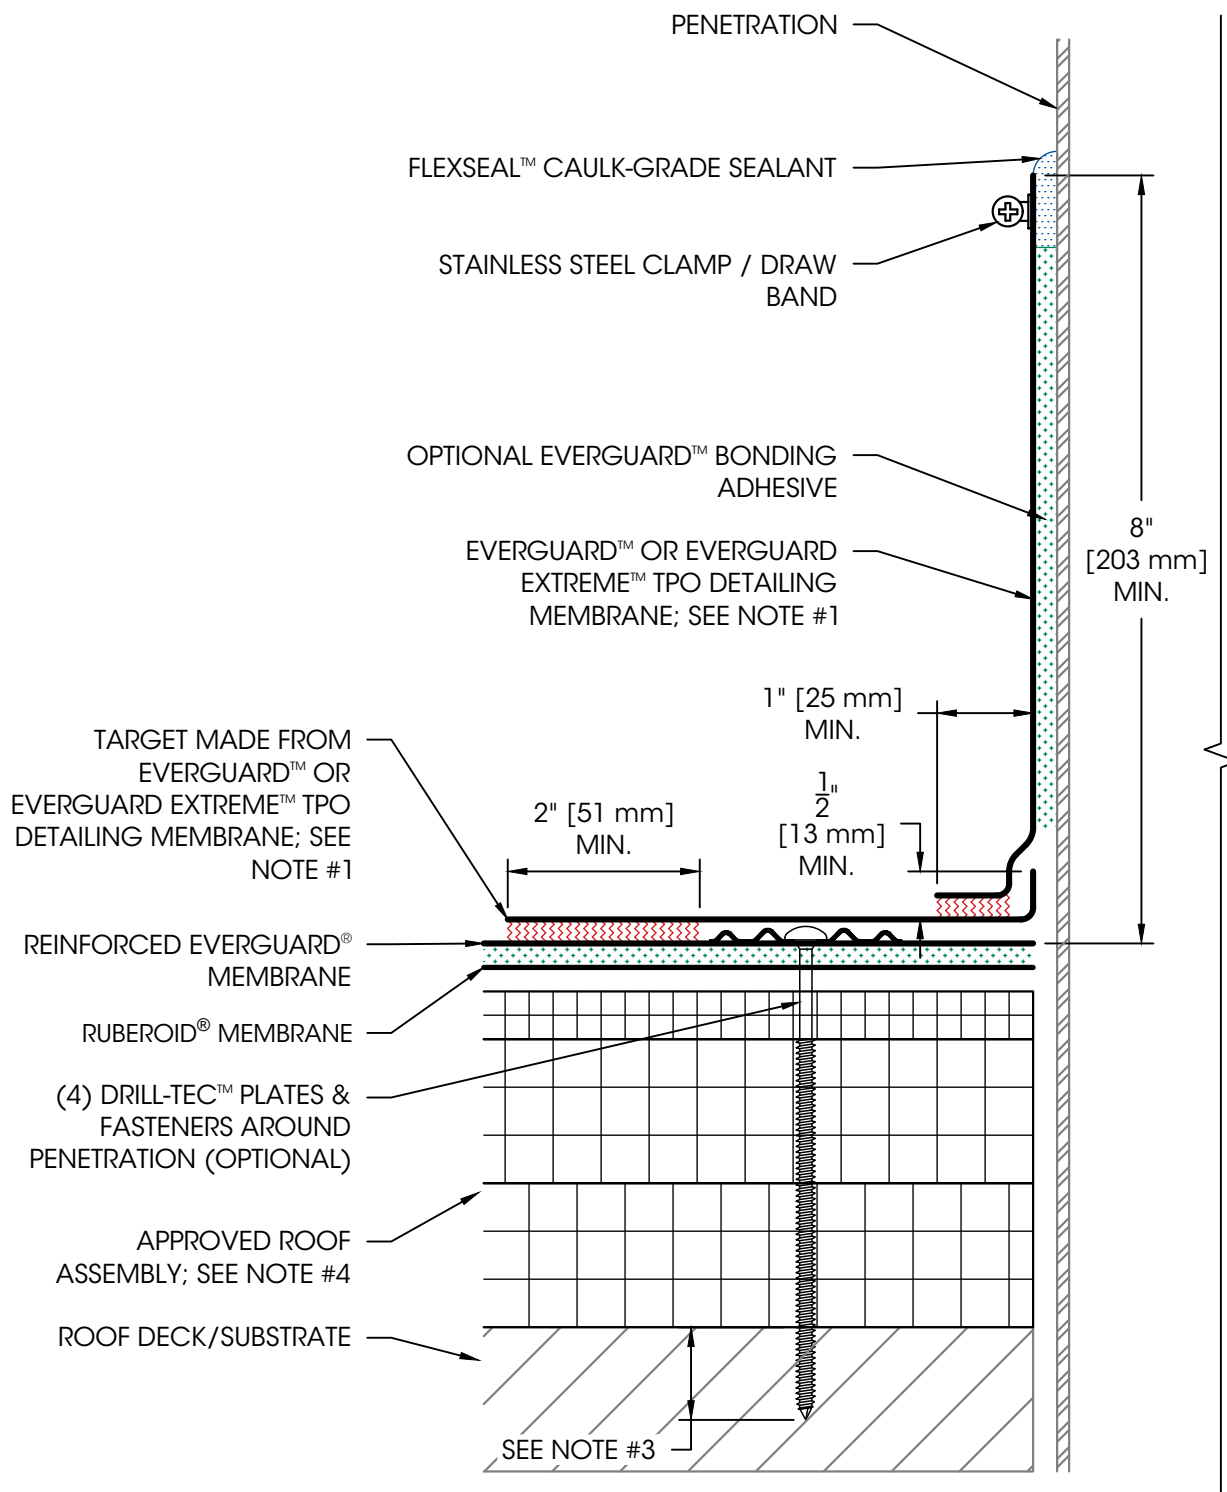

NOTES:

1. APPLY HEAT TO EVERGUARD™ DETAILING MEMBRANE AND FORM BY HAND PRIOR TO HOT AIR WELDING.
2. DO NOT USE THIS DETAIL WHEN PENETRATION TEMPERATURE EXCEEDS 160° F [71° C].
3. REFER TO THE APPLICATION TABLES IN THE CURRENT GAF MANUAL FOR MINIMUM FASTENER PENETRATION PER DECK TYPE.
4. REQUIREMENTS AND RECOMMENDATIONS OUTLINED IN THE APPLICABLE GAF MANUAL OR GUIDE SHALL APPLY IN ADDITION TO THE DRAWING ABOVE.
5. 25 YEAR GUARANTEES AND ABOVE MUST USE EXTREME DETAILING MEMBRANE.

Product:

EverGuard TPO
Fleece-back

Installation:

Hybrid

Maximum

Warranty:

35 Years

Date:

8/5/2025

Scale:

6" = 1'

Detail No.

07 54 23

952

Field-Wrapped Penetration Flashing