



ISOMETRIC VIEW (NOT TO SCALE)

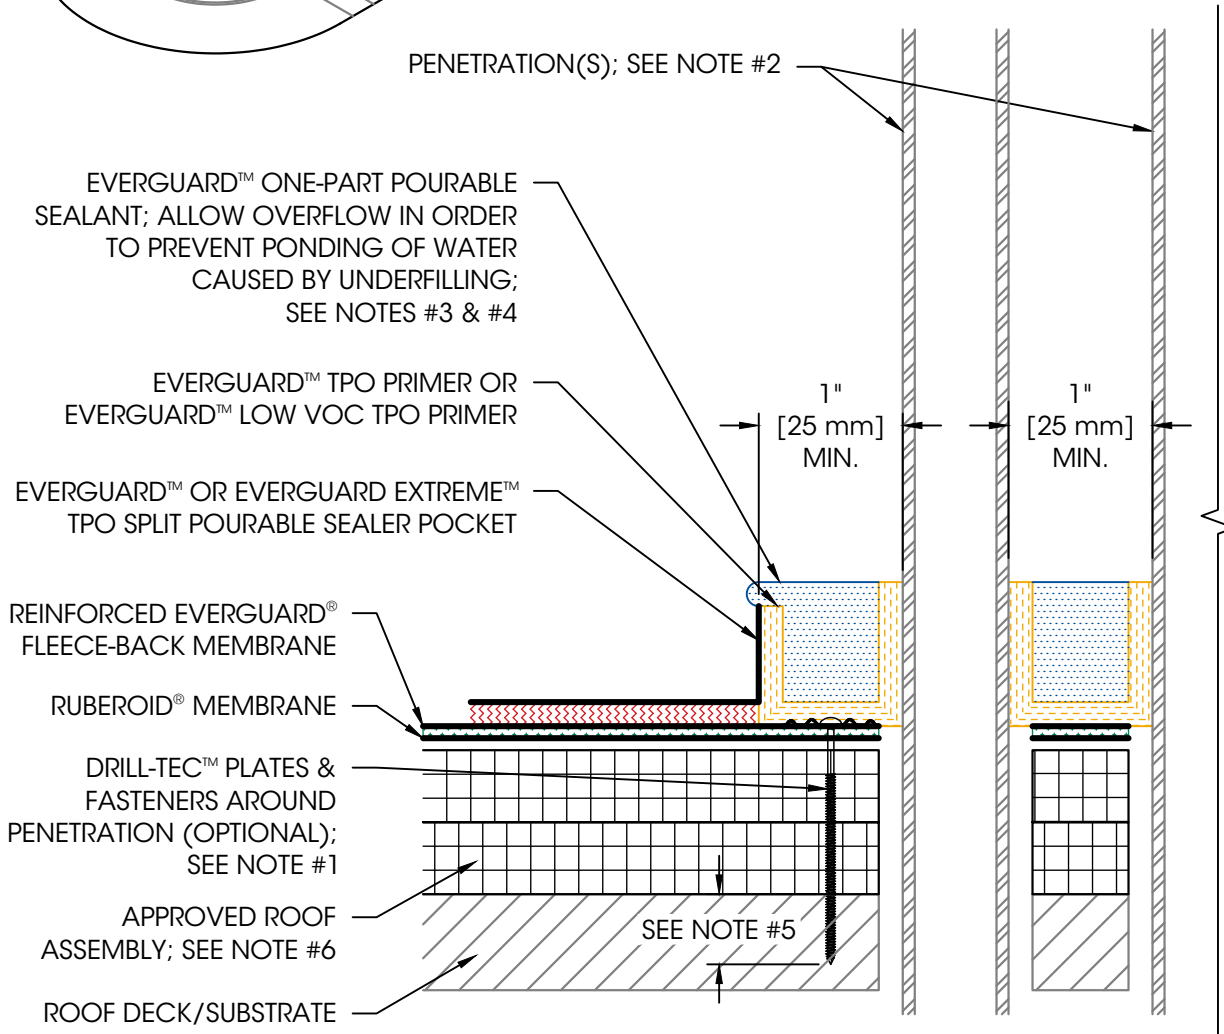

We protect what matters most™

**Legend:**  
Heat Weld

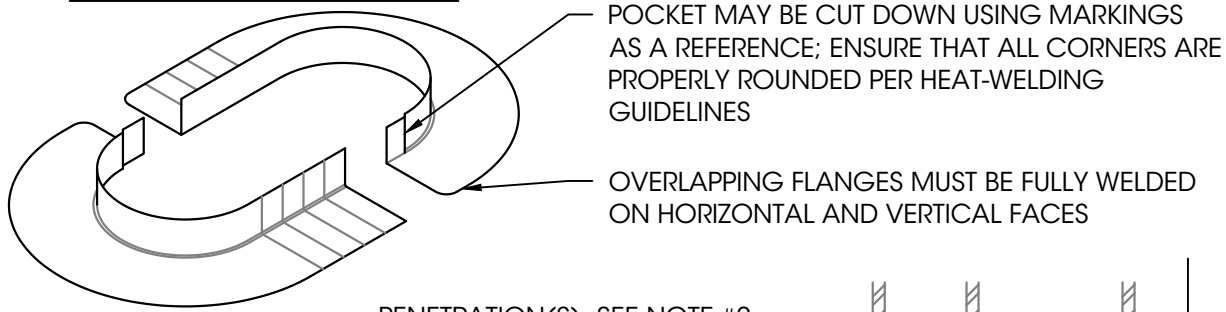

Sealant



Adhesive



Primer



**Product:**  
EverGuard TPO  
Fleece-back

**Installation:**  
Hybrid Systems

**Maximum Guarantee:**  
30 Years

**Date:**  
8/5/2025

**Scale:**  
3" = 1'

**Detail No.**  
075423  
**955**

**NOTES:**

1. IF THE PLATES AND FASTENERS INTRUDE INTO THE SEAM AREA, THEN A TARGET MUST BE FIRST INSTALLED OVER THE PLATES AND FASTENERS PRIOR TO POCKET INSTALLATION.
2. THE EXISTING PENETRATION(S) MUST BE CLEAN OF ALL DEBRIS & PRIMED PRIOR TO INSTALLATION.
3. POURABLE SEALANT IS CONSIDERED A MAINTENANCE ITEM AND IS EXCLUDED FROM GUARANTEE COVERAGE.
4. GAPS AROUND THE PENETRATION MUST BE SUFFICIENTLY SEALED TO CONTAIN THE SEALANT.
5. REFER TO THE APPLICATION TABLES IN THE CURRENT GAF MANUAL FOR MINIMUM FASTENER PENETRATION PER DECK TYPE.
6. REQUIREMENTS AND RECOMMENDATIONS OUTLINED IN THE APPLICABLE GAF MANUAL OR GUIDE SHALL APPLY IN ADDITION TO THE DRAWING ABOVE.
7. 25 YEAR GUARANTEES AND ABOVE MUST USE EXTREME ACCESSORIES.

## Split Pourable Sealer Pocket Installation