


**GAF**

# EVERGUARD GRAVEL STOP WITH CONTINUOUS CLEAT


## NOTES

- Includes concealed splice plates that must be field caulked to prevent water entry
- Unless otherwise noted, fabrication of miters and accessories are provided with a non-penetrating quicklock joint, then factory sealed watertight
- Welded miters and accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

## FACE HEIGHT 6" OR LESS

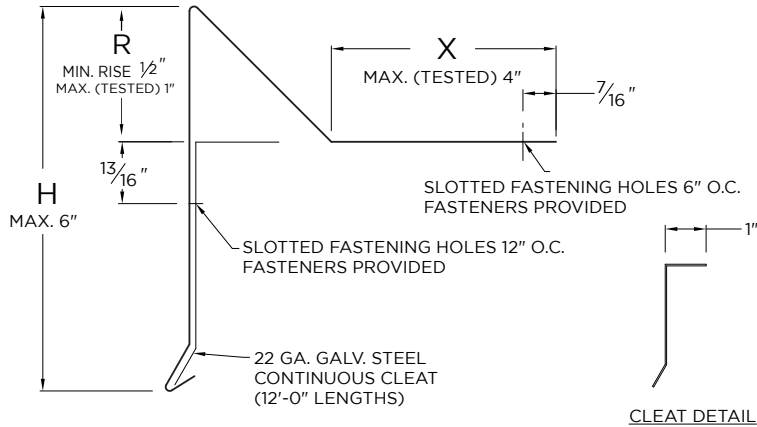

## FACE HEIGHT OVER 6"

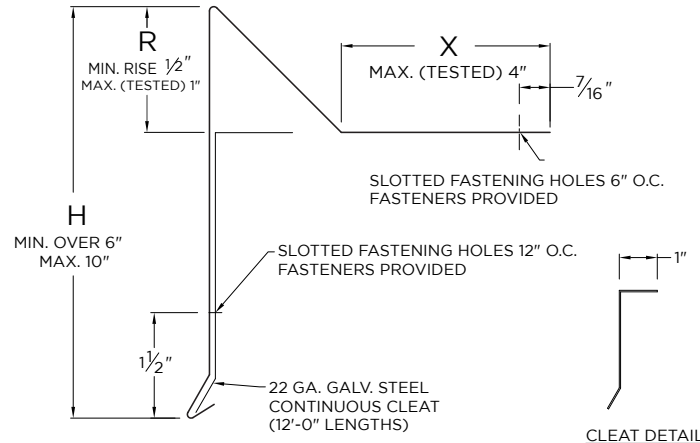

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

**Project Type:** \_\_\_\_\_

☐ By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**GAF**  
1 Campus Drive,  
Parsippany, NJ 07054  
USA  
973-628-3000  
WWW.GAF.COM

SHT# 1 of 1

DATE: 01/09/24

DRN BY: JJC

CKD BY: MM

DWG #: 25010-10230

REV: D

## DIMENSIONS

\_\_\_\_\_ (H) Face Height

\_\_\_\_\_ (X) Flange Size

\_\_\_\_\_ (R) Rise

## MATERIAL

☐ 24 Ga. Galv. Steel

☐ 22 Ga. Galv. Steel

☐ .040" Aluminum

☐ .050" Aluminum

☐ .063" Aluminum

☐ OTHER: \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

**Substrate:** ☐ Wood

If substrate is not given, wood fasteners will be provided. ☐ Masonry

☐ Metal

## QUANTITIES

\_\_\_\_\_ Lineal Feet (12'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)

Accessory Type:

☐ Quicklock (Default)

☐ Welded (Surcharge)