


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"
(102mm)

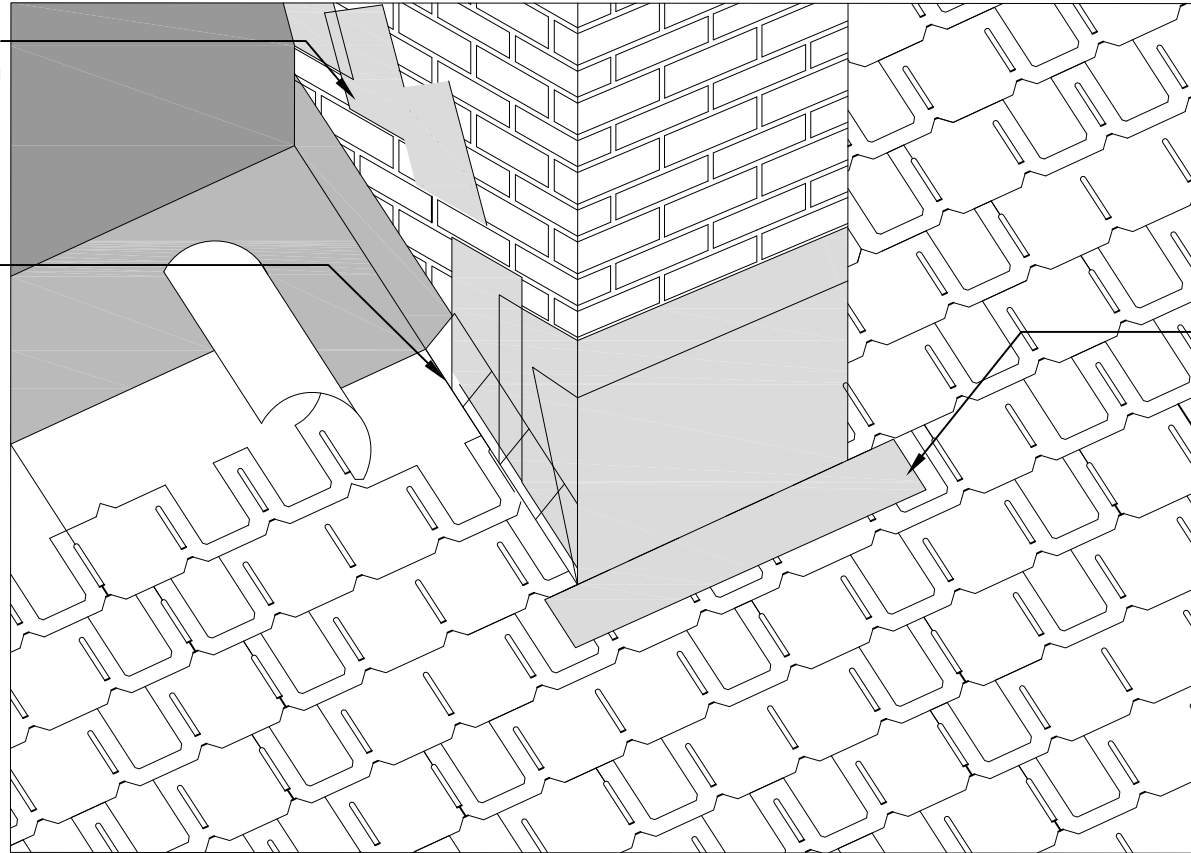

www.gaf.com
1 Campus Drive
Parsippany, NJ
07054

BRAND SERIES

**CAMELOT
SERIES**
Lifetime Shingles

REVISION DATE

6-01-15

SCALE

N.T.S

CHIMNEY FLASHING DETAIL

DETAIL NUMBER

07

DETAIL REFERENCE

SS-CAM