


Extend non-corroding metal counter flashing over base flashing.

Use one piece metal non-corroding step flashing for each course. Seal overlying shingles to step flashing with asphalt plastic cement.



At least 4"  
(102mm)

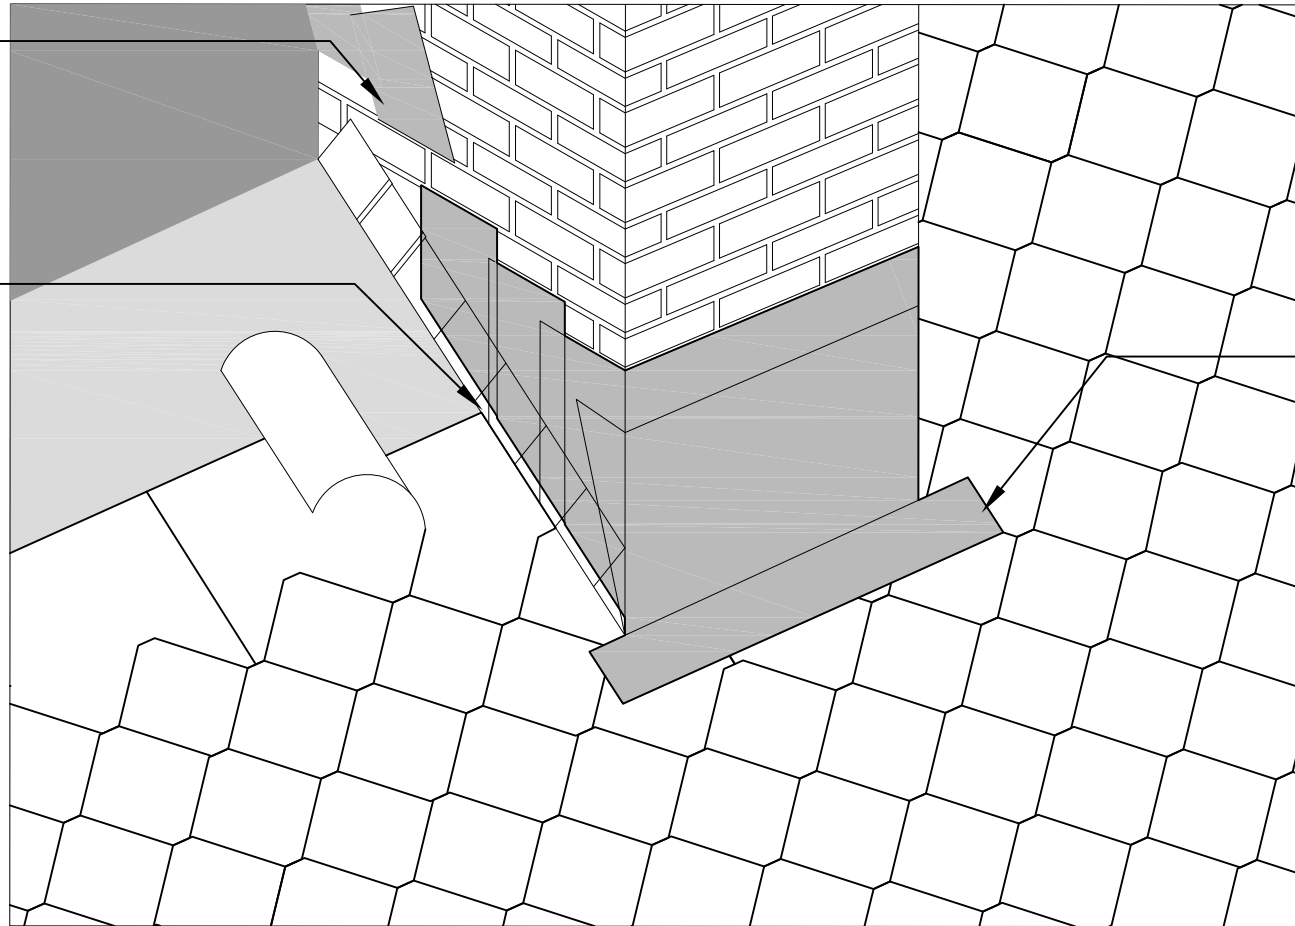

www.gaf.com  
1 Campus Drive  
Parsippany, NJ  
07054

BRAND SERIES

SIENNA SERIES

REVISION DATE

6-01-15

SCALE

N.T.S

# CHIMNEY FLASHING DETAIL

DETAIL NUMBER

07

DETAIL REFERENCE

SS-SNA