

GAF TPO Accessories EverGuard Expansion Joints (COMEG169)

Updated: 4/14



*Quality You Can Trust...From
North America's Largest Roofing Manufacturer!™*



EverGuard[®]TPO

SINGLE-PLY ROOFING SYSTEMS

Roll Accessories

TPO Roll Accessories

Description

EverGuard[®] TPO single-ply roofing system roll accessories provide roofing contractors an easy-to-install, factory-built detail. EverGuard[®] roll accessories are constructed from GAF's proven, durable EverGuard[®] TPO single-ply reinforced membrane.

- **Cost effective...**
Reduces installed costs
- **Improved reliability...**
Factory-built accessories reduce risk of leaks and callbacks
- **Improved aesthetics...**
Uniform look

Application

EverGuard[®] TPO Expansion Joints are available in two prefabricated styles: roof-to-roof and roof-to-wall. They are heat-weldable to EverGuard[®] TPO membrane, forming a strong monolithic bond. See published Application and Specifications Manual for Detailed Instructions.

Product Information

EverGuard[®] TPO Expansion Joints are provided in roof-to-roof or roof-to-wall configurations. Standard roll length is 50 feet. The membrane thickness is 60 mil nominal.

Measuring Tips


When ordering TPO Expansion Joints it is important to specify the correct bellows width.

1. Measure the opening distance of the joint.
2. Multiply this distance by 1.5.
3. Round up to next even number; this is the bellows width.

Example:

Width = 3.325"
Multiply 3.325 X 1.5 = 4.9875
Order next even number larger
bellows = 6"

Also Available...

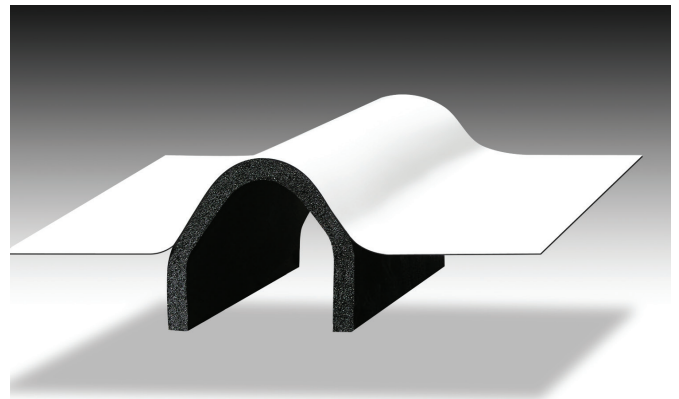

TPO Expansion Joint


- Available in 5 standard bellows widths
- Available in 2 styles:
 - Roof-to-Wall
 - Roof-to-Roof
- Custom sizes and colors also available*

*Contact your local representative for details.

Quality You Can Trust... From North America's Largest Roofing Manufacturer![™]
gaf.com



Fluted Corner



Inside Corner



Vent Boot



Universal Corner



Vent