



**20 YEAR MAX  
GUARANTEE**

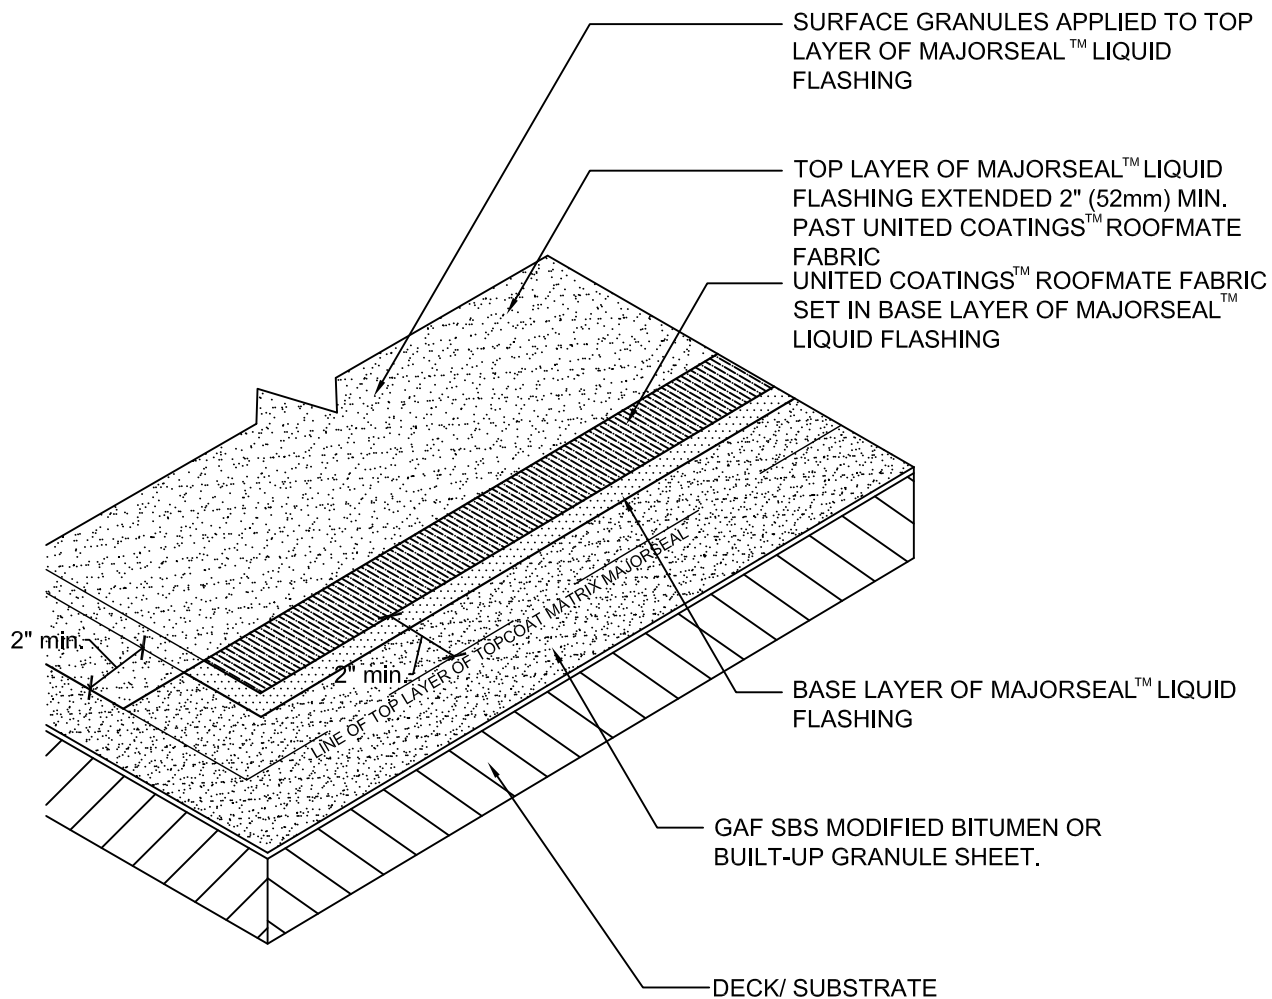

**NOTE:**

1. SWEEP LOSE GRANULES FROM FLASHING AREA ON GAF SBS MODIFIED BITUMEN OR BUILT-UP GRANULE SHEET
2. IF GAF GRANULE MEMBRANE IS LEFT EXPOSED OVERNIGHT BEFORE INSTALLING MAJORSEAL™ LIQUID FLASHING, A TEMPORARY NIGHT SEAL MUST BE INSTALLED. THE NIGHT SEAL MUST BE COMPLETELY REMOVED BEFORE INSTALLING THE FLASHING.
3. APPLICATION SURFACE SHOULD BE CLEAN OF SURFACE DEBREE PRIOR TO APPLICATION. FOR PENETRATIONS, POWER CLEAN PRIOR TO APPLICATION. SEE PENETRATION DETAILS FOR FUTURE INSTRUCTIONS.

 <small>www.gaf.com 1 Campus Drive,  Parsippany, NJ 07054</small>	<b>MAJORSEAL™</b> LIQUID FLASHING	<b>MAJORSEAL™ SYSTEM DETAIL</b>	DRAWING # <b>101</b>	SYSTEM <b>MM</b>
	FIELD OF ROOF SERIES		SCALE N.T.S.	ISSUE/ REVISION DATE 1-1-16