

EverGuard™ **WRGutters**

- EverGuard™ WR Gutter — Aluminum
- EverGuard™ WR Gutter — Steel



Box Profile



Chamfer Profile



Offset Profile

Description:

EverGuard™ WR Gutters offer excellent water management and wind protection.

EverGuard™ WR Gutters are available in aluminum or steel.

EverGuard™ WR Gutters are available in 3 different profiles: Offset, Chamfer, and Box. All three systems incorporate a 1 inch-wide extruded internal gutter bracket for strength and support. The bracket also reduces the torque of the metal with expansion and contraction in temperature changes.

Features and Benefits:

- 2-piece, extruded aluminum internal bracket for excellent strength.
- Pre-punched holes and provided splice plates and fasteners for proper attachment and fast installation.
- Manufactured in 24 ga. or 22 ga. galvanized steel, or .040", .050", or .063" aluminum.
- Matching corners, trims, expansion joints, and accessories available.

Codes and Compliance:

- **FM Approved**
FM-approved for wind uplift protection. Refer to RoofNav.com for actual assemblies.



- **State of Florida Approved**



- **Tested in accordance with ANSI/SPRI GT-1 Standard for Gutter Systems Used with Low-Slope Roofs.**

EverGuard™ WR Gutter Standard Sizes

Face	Bottom	Back
5.25"	5.25"	6.25"
5.75"	5.75"	6.75"
6.25"	6.25"	7.25"
6.75"	6.75"	7.75"
7.25"	7.25"	8.25"
7.75"	7.75"	8.75"

10 Express Colors*:


Express Colors are available for quick shipping to meet your job requirements.†



Almond



Medium Bronze



Bone White



Sandstone



Sierra Tan




Cityscape



Slate Gray



Clear Anodized



Stone White



Dark Bronze

For standard and premium colors, please refer to the GAF color chart, available at gaf.com/perimeteredgemetal. Custom colors are also available.

* It is difficult to reproduce the color clarity of these products. Before selecting your colors, please contact your local GAF territory manager to request a paint chip for accurate color representation.

† Express Colors available in shorter lead times for 24 ga., .040", and .050" only. Standard lead times, which may be longer, apply for 22 ga. and .063".




Visit gaf.com

For additional information, contact GAF Design Services at 1-877-423-7663 or designservices@gaf.com


We protect what matters most™




Box Profile:

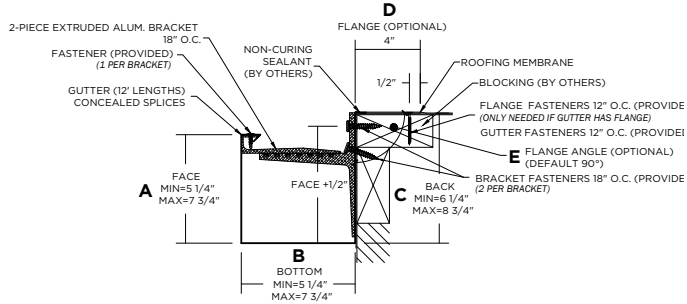

Chamfer Profile:


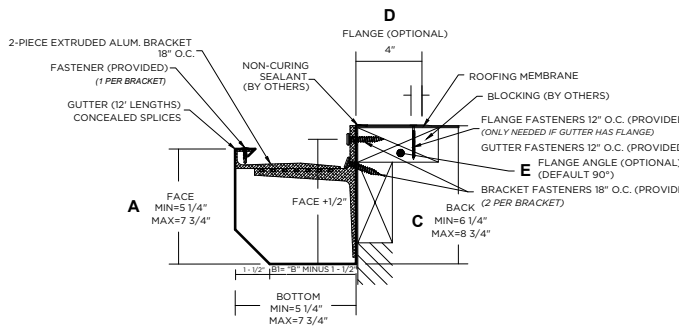


Offset Profile:

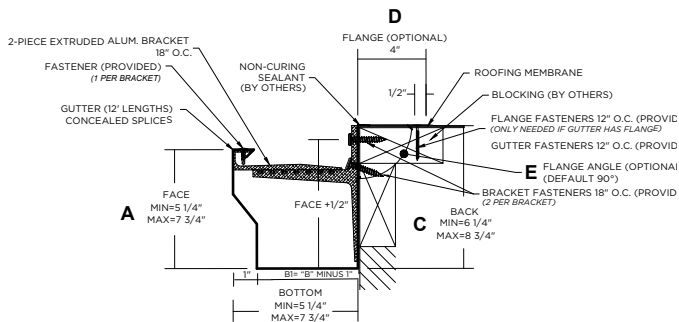

Downspout:


Box Downspouts are available in a variety of standard sizes, or they can be fabricated to meet specific job requirements. Downspouts are manufactured with simple connection configurations and include three attachment straps per 12' section, which enables fast and easy installation.

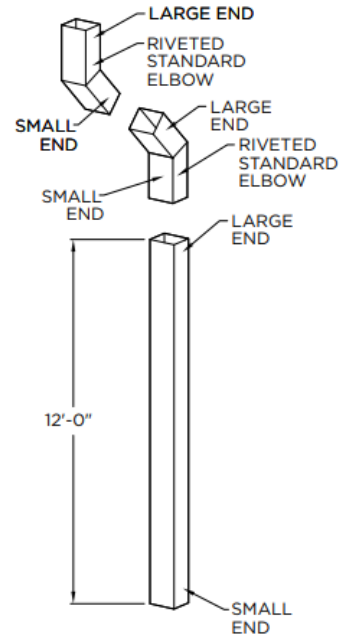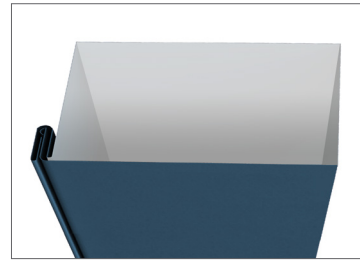

Other Water Control Products:

Scuppers and Conductor Heads (Multiple Versions Available)

Thru-Wall Scuppers



Conductor Heads



Thru-Wall Scuppers with Conductor Heads

