

- MembraneShield™ 5" Field-Applied Seam Film
- MembraneShield™ Seam Film Applicator



MembraneShield™ 5" Field-Applied Seam Film:

Description:

EverGuard® MembraneShield™ 5" Field-Applied Seam Film is a monolayer protective film that is applied to exposed seams on installed MembraneShield™ installations. This accessory product helps keep these seams clean for the duration of the installation.

MembraneShield™ 5" Field-Applied Seam Film is installed on the jobsite and utilizes a water-insoluble acrylic-based adhesive. The film is designed to be left on during installation of the roof and to be removed after installation is completed or up to 90 days after installation.

Product Information:

MembraneShield™ 5" Field-Applied Seam Film is available in boxes of 8 rolls of 5" x 800' film, and is for use with GAF EverGuard™ MembraneShield™ Temporary Dirt Blocking Film for TPO Membrane.

Features and Benefits:

- Protect new TPO membrane seams from dirt and staining during installation
- Easy to install utilizing the MembraneShield™ Seam Film Applicator
- Helps reduce after-installation cleaning labor
- Helps protect aesthetic impact of visible (below skyline) roofs
- Great choice for new roofs that may experience additional foot traffic from other building trades
- Keep roofs clean during tear offs and recovers of EPDM and asphaltic roofs

Specifications	MembraneShield™ 5" Field-Applied Seam Film	MembraneShield™ Seam Film Applicator
SKU	75C1	75C3
Size	5" x 800'	N/A
Packaging	8 rolls, box size 7.5" x 7.5" x 24"	N/A



Visit gaf.com

For additional information, contact GAF Design Services at 1-877-423-7663 or designservices@gaf.com

MembraneShield™ Seam Film Applicator:

Description:

Use the MembraneShield™ Seam Film Applicator to apply the Seam Film to the exposed seams.

Product Information:


MembraneShield™ Seam Film Applicator has been designed to efficiently apply MembraneShield 5" Field-Applied Seam Film. It features captive fastening, ensuring quick assembly and loading/unloading of Seam Film.




We protect what matters most™

EverGuard™
GAF MembraneShield™
Temporary Dirt-Blocking Film for TPO Membrane

- MembraneShield™ 5" Field-Applied Seam Film
- MembraneShield™ Seam Film Applicator

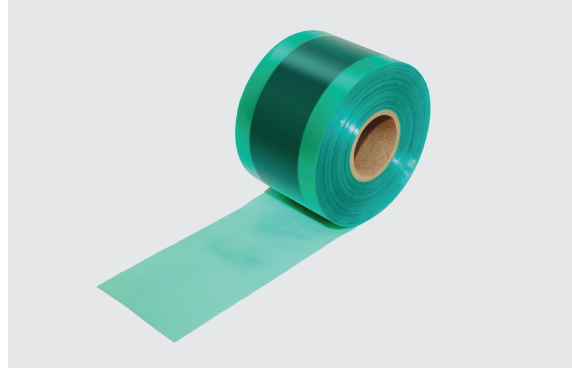


Application Instructions:




Attach the handle to the applicator by placing the lower piece into the receiver and inserting the locking pin.

Then insert the top piece of the applicator into the lower piece, set the height, and install the locking pin.



Loosen the knob, and load a roll of film with the loose end extending UNDER the roll, adhesive side facing up. (See photo for orientation.)

Tighten the knob.

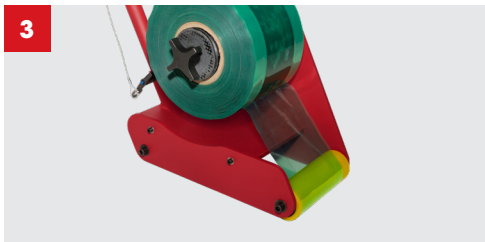

Feed the film over the roller on the front of the applicator so the adhesive side is now facing down, toward the TPO membrane.



Center the seam film over the gap in the MembraneShield™ Dirt-Blocking Film and push the Seam Film Applicator forward to cover the exposed seam, ensuring the adhesive portion of the film is only applied to the exposed TPO surface.



When complete, cut the seam film with a knife to separate from Seam Film Applicator.

