



We  
protect  
what  
matters  
most™

**Legend:**

Heat Weld




Sealant



Adhesive



Foam

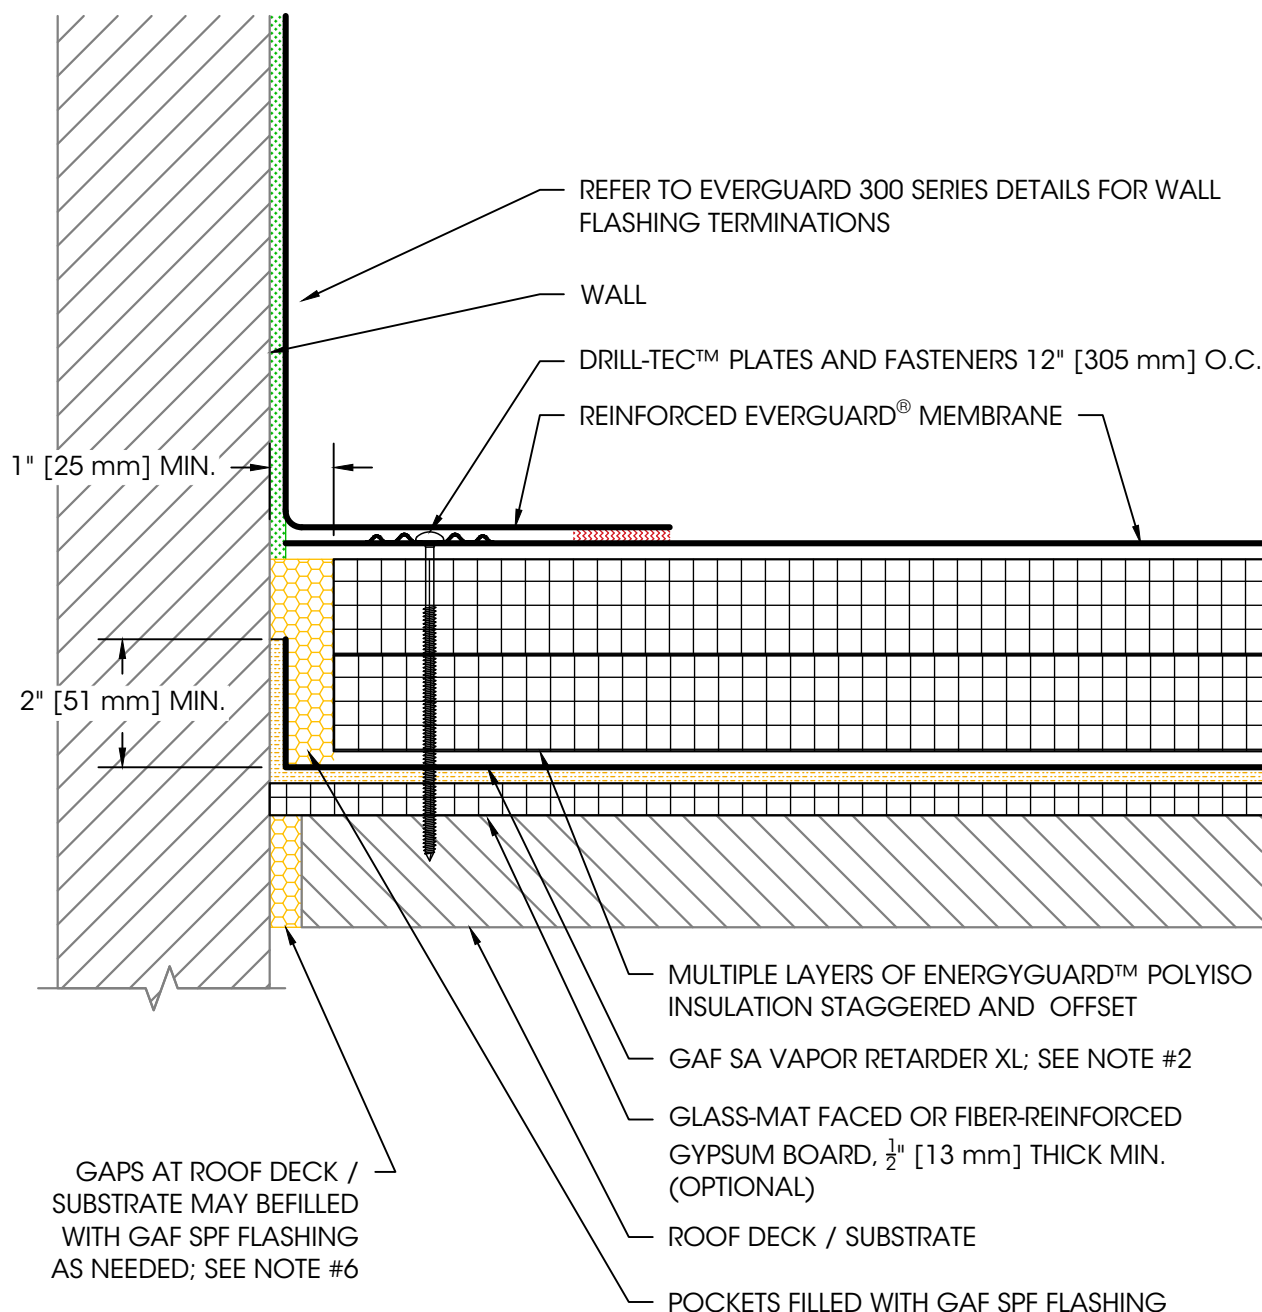

**NOTES:**

1. USE DETAIL IN CONJUNCTION WITH THE STANDARD FLASHING AND TERMINATION DETAILS FOR THE APPROVED ROOF SYSTEM.
2. A VAPOR RETARDER MAY BE USED AT THE DECK LEVEL IF THERE ARE CONCERNS WITH POTENTIAL MOISTURE ISSUES DUE TO CERTAIN CONSTRUCTION PROCESSES OR OTHER SOURCES DURING BUILDING USE.
3. REFER TO GAF SA PRIMER INSTALLATION INSTRUCTIONS FOR GENERAL GUIDELINES.
4. MAINTAIN SEPARATION BETWEEN VAPOR RETARDER AND MEMBRANE / ADHESIVE TO AVOID POTENTIAL INCOMPATIBILITY ISSUES.
5. FOR STEEL ROOF DECKS: FILL STEEL DECK FLUTES WITH CLOSED CELL SPRAY FOAM INSULATION PRIOR TO THE INSTALLATION OF ABOVE DECK INSULATION A MINIMUM OF 12" [305 mm] FROM FACE OF WALL ON EACH SIDE.
6. WALL TO ROOF DECK INTERFACE MUST BE FULLY AIR SEALED.

**Product:**

EverGuard TPO

**Installation:**

Cold Storage  
Systems

**Maximum  
Warranty:**

—

**Date:**

2/14/2025

**Scale:**

Not To Scale

**Detail No.**

075423

**309**

## Vapor Retarder Termination at Wall