



ELK

ROOFING PRODUCTS SPECIFICATIONS – MYERSTOWN, PA



**PRESTIQUE®
HIGH DEFINITION®**



RAISED PROFILE®

Prestique Plus High Definition and Prestique Gallery Collection™

Product size	13¼" x 39"	50-year limited warranty period:
Exposure	5"	5-7** years non-prorated coverage for shingles and application labor with prorated coverage for remainder of limited warranty period, plus an option for transferability*. 5-year limited wind warranty*. Wind Coverage: standard 80 mph, extended 110 mph***.
Pieces/Bundle	16	
Bundles/Square	4/98.5 sq.ft.	
Squares/Pallet	11	

Prestique I High Definition

Product size	13¼" x 39"	40-year limited warranty period:
Exposure	5"	5-7** years non-prorated coverage for shingles and application labor with prorated coverage for remainder of limited warranty period, plus an option for transferability*. 5-year limited wind warranty*. Wind Coverage: standard 80 mph, extended 90 mph***.
Pieces/Bundle	16	
Bundles/Square	4/98.5 sq.ft.	
Squares/Pallet	13	

Prestique High Definition

Product size	13¼" x 38¾"	30-year limited warranty period:
Exposure	5"	5-7** years non-prorated coverage for shingles and application labor with prorated coverage for remainder of limited warranty period, plus an option for transferability*. 5-year limited wind warranty*. Wind Coverage: standard 80 mph.
Pieces/Bundle	22	
Bundles/Square	3/100 sq.ft.	
Squares/Pallet	16	

Raised Profile

Product size	13¼" x 38¾"	30-year limited warranty period:
Exposure	5"	5-7** years non-prorated coverage for shingles and application labor with prorated coverage for remainder of limited warranty period, plus an option for transferability*. 5-year limited wind warranty*. Wind Coverage: standard 70 mph.
Pieces/Bundle	22	
Bundles/Square	3/100 sq.ft.	
Squares/Pallet	16	

HIP AND RIDGE SHINGLES

Seal-A-Ridge® w/FLX™

Size: 12" x 12"
Exposure: 6½"
Pieces/Bundle: 45
Coverage: 4 bundles =
100 linear feet

Vented RidgeCrest™ w/FLX™

Size: 13" x 13¼"
Exposure: 9¼"
Pieces/Box: 26
Coverage: 5 boxes =
100 linear feet

Elk Starter Strip

52 Bundles/Pallet
18 Pallets/Truck
936 Bundles/Truck
19 Pieces/Bundle
1 Bundle = 120.33 linear feet

Available Colors (Check Availability): Antique Slate, Barkwood, Birchwood, Forest Green, Hickory, Pewter Grey, Sablewood, Shakedown, Weatheredwood, Wedgewood. Gallery Collection: Balsam Forest™, Sienna Sunset™, Weathered Sage™.

All Prestique, Raised Profile and Seal-A-Ridge roofing products contain Elk WindGuard® sealant. WindGuard activates with the sun's heat, bonding shingles into a wind- and weather-resistant cover that resists blow-offs and leaks.

All Prestique and Raised Profile shingles listed above meet UL® Wind Resistant (UL 997) and class "A" Fire Ratings (UL 790); and ASTM Specifications D 3018, Type-I; E 108, the requirements of ASTM D 3462, and ASTM D 3161 Class "F". All Prestique and Raised Profile shingles listed above meet the requirements of the IRC 2003 code, regarding Section R905.2.6. All Prestique and Raised Profile shingles listed above meet the Canadian Standards Association (CAN/CSA) CODE A123.5-98 and are Miami-Dade County Approved NOA #: 03-1027.3.

*See actual limited warranty for conditions and limitations.

** Effective January 1, 2004, the seven-year non-prorated Umbrella Coverage Period applies only when a full Elk Roof System is installed with the original installation of the Elk shingles, all in accordance with Elk's application instructions for such products. A full Elk roof system includes Elk Hip and Ridge shingles on all hips and ridges, Elk Starter Strip along all rake and eave edges, an Elk ventilation system, and Elk All-Climate Self-Adhering Underlayment in all valleys. Additionally, Elk All-Climate Self-Adhering Underlayment is required along the rake and eave edges of the roof in and north of the states of VA, KY, MO, KS, CO, UT, NV, & OR.

***For a limited Wind Warranty up to 110 mph for Prestique Gallery Collection, Prestique Plus, or 90 mph for Prestique I or Prestique Grandé, at least six (6) properly placed NAILS and Elk Starter Strip shingles are required. See application instructions printed on the shingle wrapper for additional requirements.

SPECIFICATIONS

Scope: Work includes furnishing all labor, materials and equipment necessary to complete installation of the shingles specified herein. Hip and ridge type to be Elk Seal-A-Ridge with formula FLX or RidgeCrest™.

All exposed metal surfaces (flashing, vents, etc.) to be painted with matching Elk roof accessory paint.

Preparation of Roof Deck: Roof deck to be dry, well-seasoned 1" x 6" (25.4mm x 152.4mm) boards; exterior-grade plywood (exposure 1 rated sheathing) at least 3/8" (9.525mm) thick conforming to the specifications of the American Plywood Association; 7/16" (11.074mm) oriented strandboard; or chipboard. Most fire retardant

plywood decks are NOT approved substrates for Elk shingles. Consult Elk Field Service for application specifications over other decks and other slopes.

Materials: Underlayment for standard roof slopes, 4" per foot (101.6/304.8mm) or greater: apply non-perforated No. 15 or 30 asphalt-saturated felt underlayment. For low slopes [4" per foot (101.6/304.8mm) to a minimum of 2" per foot (50.8/304.8mm)], use two plies of underlayment overlapped a minimum of 19". Fasteners shall be of sufficient length and holding power for securing material as required by the application instructions printed on shingle wrapper.

Complete application instructions are published by Elk and printed on the back of every shingle bundle. All warranties are contingent upon the correct installation as shown on the instructions. These instructions are the minimum required to meet Elk application requirements. In some areas, building codes may require additional application techniques or methods beyond our instructions. In these cases, the local code must be followed. Under no circumstances will Elk accept application requirements less than those contained in this application instruction.

For specifications in CSI format, call 800.354.SPEC (7732) or e-mail specinfo@elkcorp.com.

NORTH OFFICE:
800.944.4344

ATLANTIC OFFICE:
800.945.5551


CORPORATE HEADQUARTERS:
800.354.7732

PLANT LOCATION:
800.944.4344




DIRECTIONS FOR APPLICATION


Please read carefully. Failure to follow these instructions may void the product warranty. See specific application instructions for Prestique® Plus and Prestique Gallery Collection™ 110 MPH, and Prestique 1 90 MPH limited wind warranty requirements.

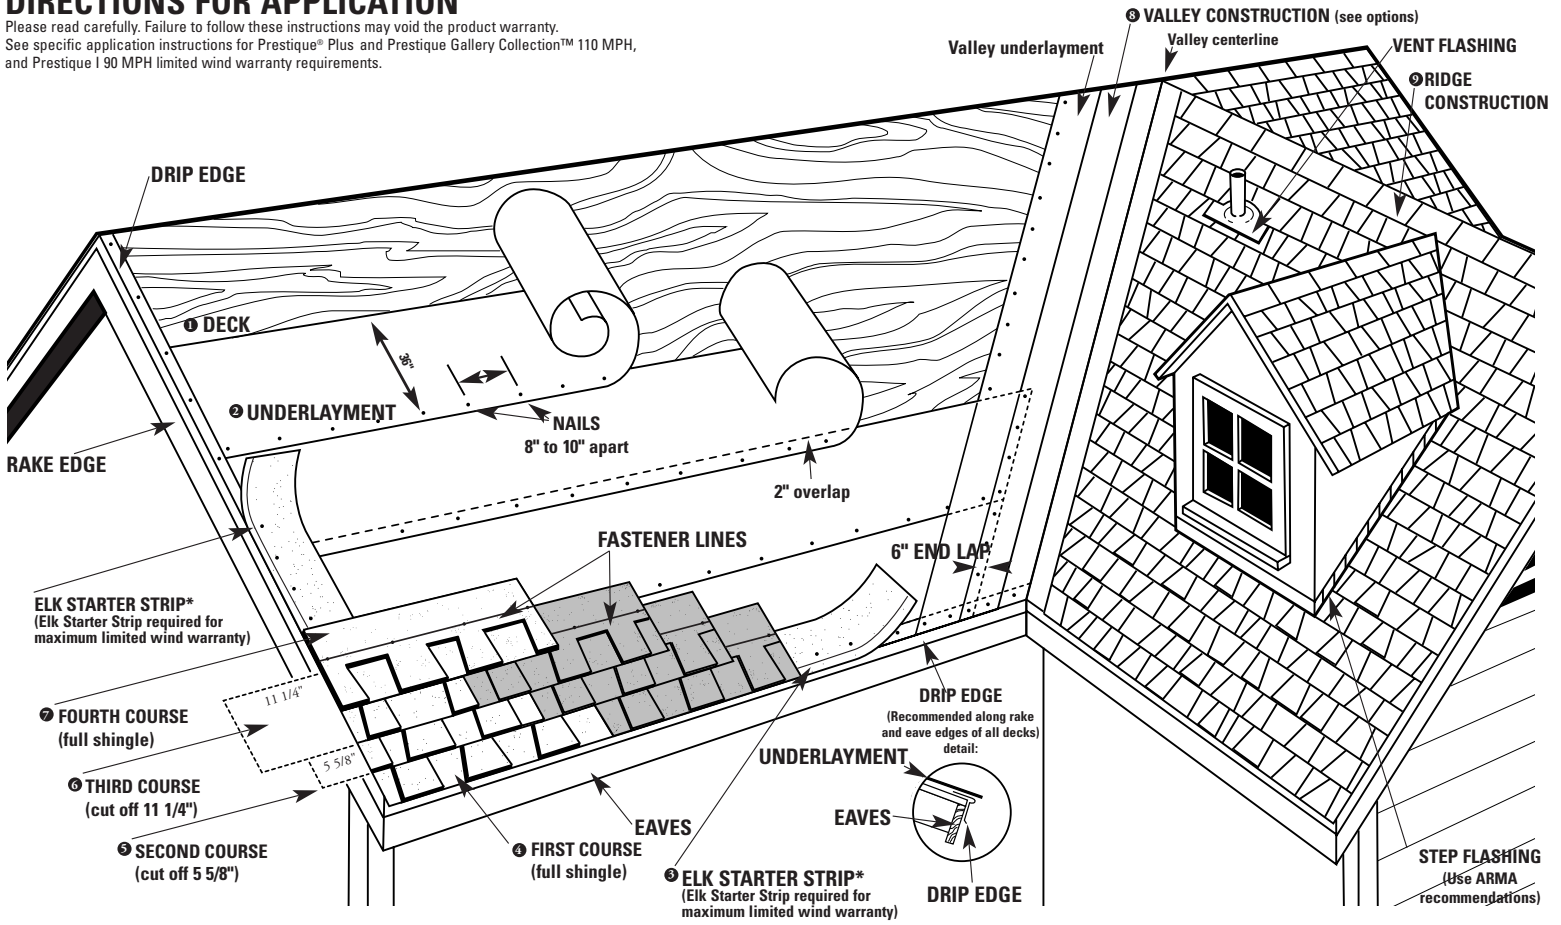


③ VALLEY CONSTRUCTION OPTION (California Open and California Closed are also acceptable) NOTE: For complete ARMA valley installation details, see ARMA Residential Asphalt Roofing Manual.



VALLEY CENTER LINE



VALLEY CENTER LINE



VALLEY CENTER LINE

DIRECTIONS FOR APPLICATION

These application instructions are the minimum required to meet Elk's application requirements. Your failure to follow these instructions may void the product warranty. In some areas, the building codes may require additional application techniques or methods beyond our instructions. In these cases, the local code must be followed. Under no circumstances will Elk accept application requirements that are less than those printed here. Shingles should not be jammed tightly together. All attics should be properly ventilated. Note: It is not necessary to remove tape on back of shingle. Do not mix Myerstown shingles with Shafter, Ennis or Tuscaloosa shingles. See wrapper instructions or contact Myerstown plant for details.

① DECK PREPARATION

Roof decks should be dry, well-seasoned 1" x 6" boards or exterior grade plywood minimum 3/8" thick and conform to the specifications of the American Plywood Association or 7/16" oriented strandboard, or 7/16" chipboard.

② UNDERLAYMENT

Apply underlayment (Non-Perforated No. 15 or 30 asphalt saturated felt). Cover drip edge at eaves only.

For low slope (2/12 up to 4/12), completely cover the deck with two plies of underlayment overlapping a minimum of 19". Begin by fastening a 19" wide strip of underlayment placed along the eaves. Place a full 36" wide sheet over the starter, horizontally placed along the eaves and completely overlapping the starter strip.

EAVE FLASHING FOR ICE DAMS (ASK A ROOFING CONTRACTOR, REFER TO ARMA MANUAL OR CHECK LOCAL CODES)

For standard slope (4/12 to less than 21/12), use coated roll roofing of no less than 50 pounds over the felt underlayment extending from the eave edge to a point at least 24" beyond the inside wall of the living space below or a self-adhered eave and flashing membrane such as Elk's SAU.

For low slope (2/12 up to 4/12), completely cover the deck with a Self Adhering Underlayment such as Elk's SAU or two plies of underlayment overlapping a minimum of 19". Begin by fastening a 19" wide strip of underlayment placed along the eaves. Place a full 36" wide sheet over the starter, horizontally placed along the eaves and completely overlapping the starter strip. Consult the Elk Field Service Department for application specifications over other decks and other slopes.

③ STARTER SHINGLE COURSE

USE AN ELK STARTER STRIP OR A STRIP SHINGLE INVERTED WITH THE HEADLAP APPLIED AT THE EAVE EDGE. With at least 4" trimmed from the end of the first shingle, start at the rake edge overhanging the eave and rake edges 1/2" to 3/4". Fasten 2" from the lower edge and 1" from each side.

④ FIRST COURSE

Start at rake and continue course with full shingles laid flush with the starter course. Shingles may be applied with a course alignment of 45° on the roof.

⑤ SECOND COURSE

Start at the rake with the shingle having 5 5/8" trimmed off and continue across roof with full shingles.

⑥ THIRD COURSE

Start at the rake with the shingle having 11 1/4" trimmed off and continue across roof with full shingles.

⑦ FOURTH COURSE

Start at the rake and continue with full shingles across roof.

FIFTH AND SUCCEEDING COURSES

Repeat application as shown for second, third and fourth courses. Do not rack shingles straight up the roof.

⑧ VALLEY CONSTRUCTION

Open, woven and closed cut valleys are acceptable when applied by Asphalt Roofing Manufacturing Association (ARMA) recommended procedures. For metal valleys, use 36" wide vertical underlayment prior to applying 18" metal flashing (secure edge with nails). No nails are to be within 6" of valley center.

⑨ RIDGE CONSTRUCTION

For ridge construction use Class "A" Seal-A-Ridge® with formula FLX™ or RidgeCrest™ (see ridge package for installation instructions).

FASTENERS

While nailing is the preferred method for Elk shingles, Elk will accept fastening methods according to the following instructions.

Always nail or staple through the fastener line.

NAILS: Corrosive resistant, 3/8" head, minimum 12-gauge roofing nails. Elk recommends 1-1/4" for new roofs and 1-1/2" for re-roofs. In cases where you are applying shingles to a roof that has an exposed overhang, for new roofs only, 3/4" ring shank nails are allowed to be used from the eave's edge to a point up the roof that is past the outside wall line. 1" ring shank nails allowed for re-roof.

STAPLES: Corrosive resistant, 16-gauge minimum, crown width minimum of 15/16". Note: An improperly adjusted staple gun can result in raised staples that can cause a fish-mouthed appearance and can prevent sealing.

Fasteners should be long enough to obtain 3/4" deck penetration or penetration through deck, whichever is less.


MANSARD APPLICATIONS

Correct fastening is critical to the performance of the roof. For slopes exceeding 60° (or 21/12), use six fasteners per shingle. Locate fasteners in the fastener area 1" from each side edge with the remaining four fasteners equally spaced along the length of the double thickness (laminated) area. Only fastening methods according to the above instructions are acceptable.

LIMITED WIND WARRANTY


- For a Limited Wind Warranty, all Prestique and Raised Profile™ shingles must be applied with 4 properly placed fasteners, or in the case of mansard applications, 6 properly placed fasteners per shingle.
- For a Limited Wind Warranty up to 110 MPH for Prestique Gallery Collection or Prestique Plus or 90 MPH for Prestique I, shingles must be applied with 6 properly placed NAILS per shingle. SHINGLES APPLIED WITH STAPLES WILL NOT QUALIFY FOR THIS ENHANCED LIMITED WIND WARRANTY. Also, Elk Starter Strip shingles must be applied at the eaves and rake edges to qualify Prestique Plus, Prestique Gallery Collection and Prestique I shingles for this enhanced Limited Wind Warranty. Under no

circumstances should the Elk Shingles or the Elk Starter Strip overhang the eaves or rake edge more than 3/4 of an inch.



HELP STOP BLOW-OFFS AND CALL-BACKS

A minimum of four fasteners must be driven into the DOUBLE THICKNESS (laminated) area of the shingle. Nails or staples must be placed along – and through – the "fastener line". CAUTION: Do not use fastener line for shingle alignment.

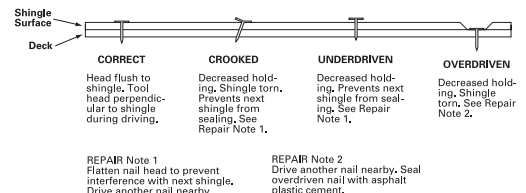

Refer to local codes, which in some areas may require specific application techniques beyond those Elk has specified.

All Prestique and Raised Profile shingles have a U.L.® Wind Resistance Rating when applied in accordance with these instructions using nails or staples on re-roofs as well as new construction.

CAUTION TO WHOLESALE: Careless and improper storage or handling can harm fiberglass shingles. Keep these shingles completely covered, dry, reasonably cool, and protected from the weather. Do not store near various sources of heat. Do not store in direct sunlight until applied. DO NOT DOUBLE STACK. Systematically rotate all stock so that the material that has been stored the longest will be the first to be moved out.

©2005, Elk Premium Building Products, Inc. All trademarks, ®, are registered trademarks of Elk Premium Building Products, Inc. All trademarks, ™, are trademarks pending registration of Elk Premium Building Products, Inc., an ElkCorp company (NYSE:ELK). UL is a registered trademark of Underwriters Laboratories, Inc.